

Point-mixed — primary RF1, c1
Matched repeats r0, r1

Native
TH TCP
TH EFA
TH EFA direct
TH EFA native
TiKV
Cassandra
FoundationDB


read API p50

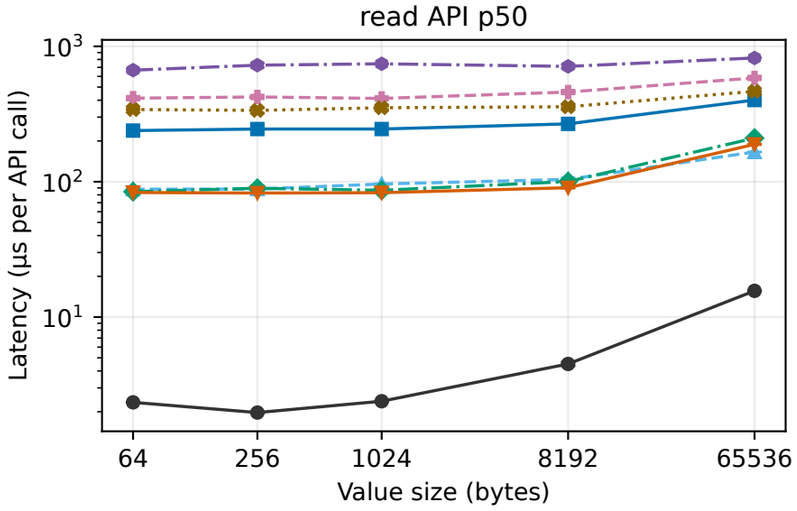


put API p50

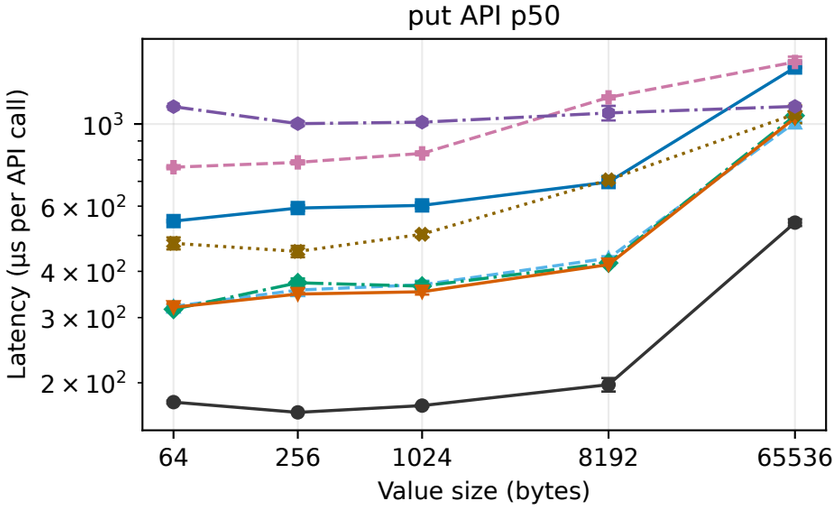


delete API p50

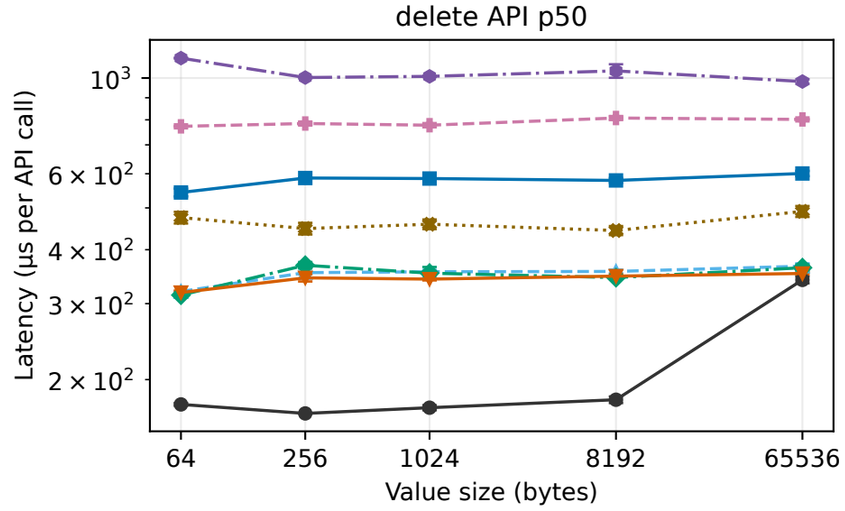


missing_read API p50

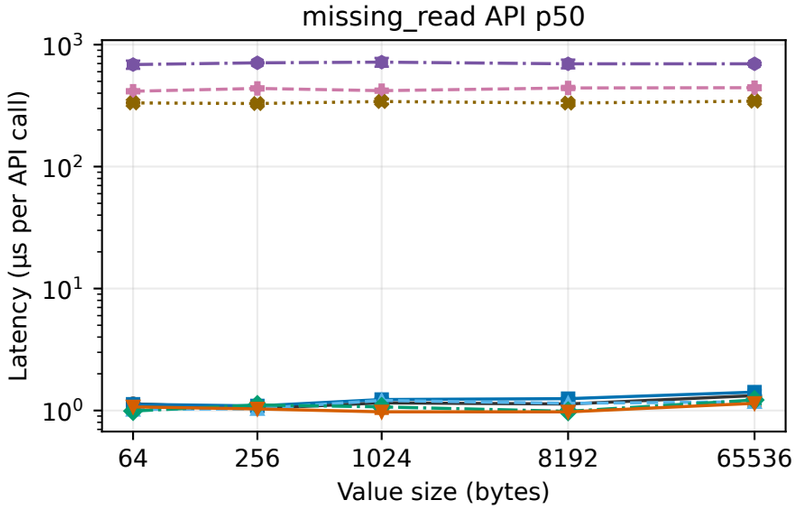


read API p99

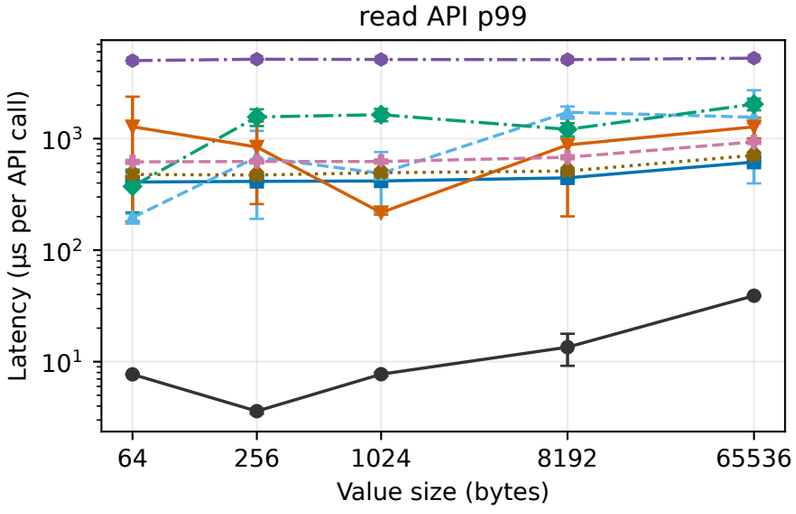


put API p99

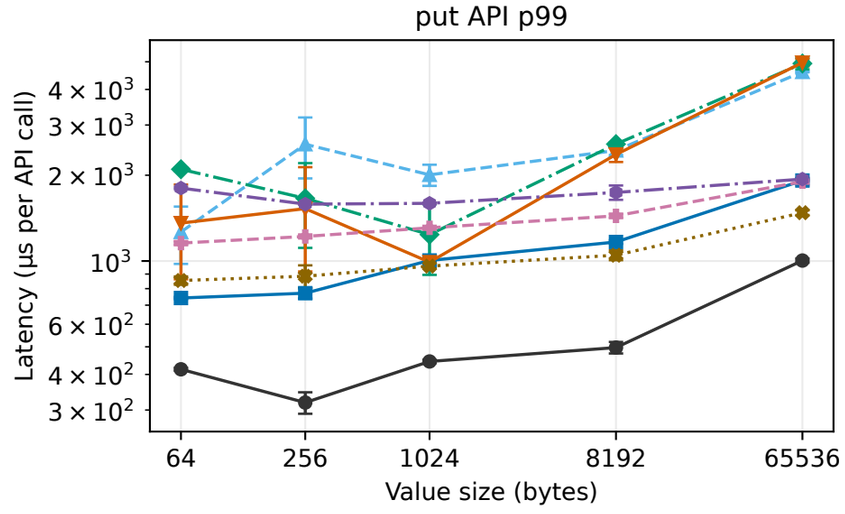

delete API p99

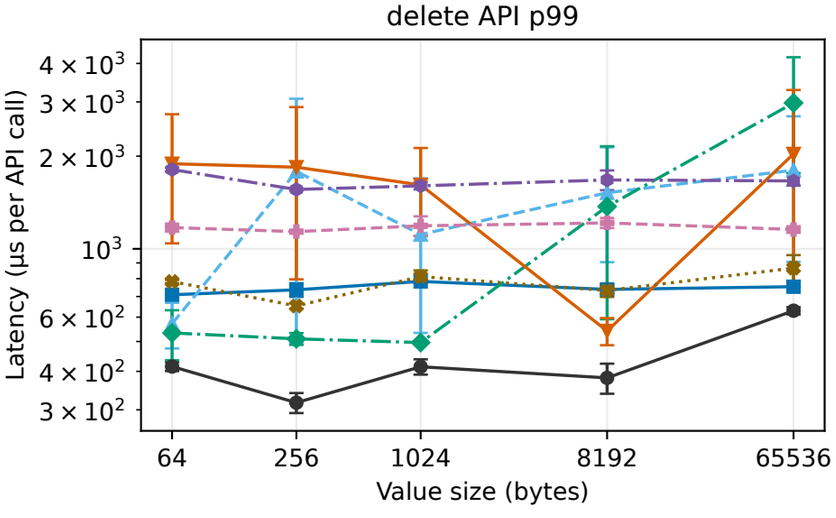

missing_read API p99

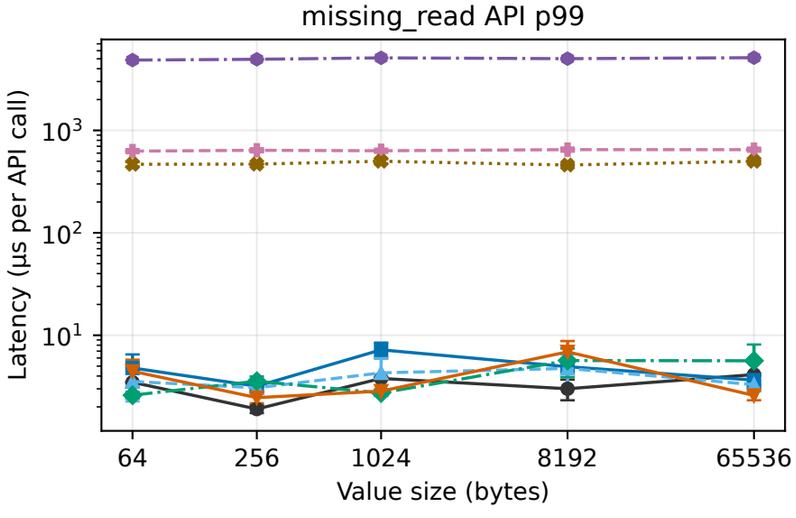

Closed-loop c1: 45% read, 45% put, 5% delete, 5% missing_read. Missing-read success is a successful absence result, not a hit. Each operation/outcome remains separate; delete/missing tails have small populations. Points: median of matched per-repeat values; whiskers: observed run min/max, NOT confidence intervals. No pooled quantiles; N=2 supports no confidence claim. Successful latency is conditional on operation/outcome. RF1 does not equalize consistency, durability, security, or transaction semantics. Primary RF1 only: native uses value_wal_barrier and TH explicit caches are off; other cohorts use their stated settings. Warm OS is not guaranteed cache residency. Tail quantiles are descriptive, including small populations.