# Pure reads — primary RF1, c16
## Matched repeats r0, r1

Native
TH TCP
TH EFA
TH EFA direct
TH EFA native
TiKV
Cassandra
FoundationDB

API p50

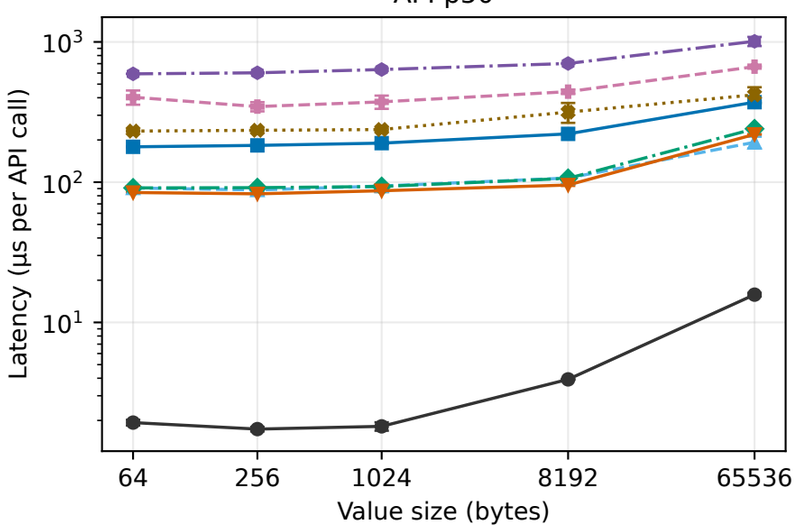


API p99

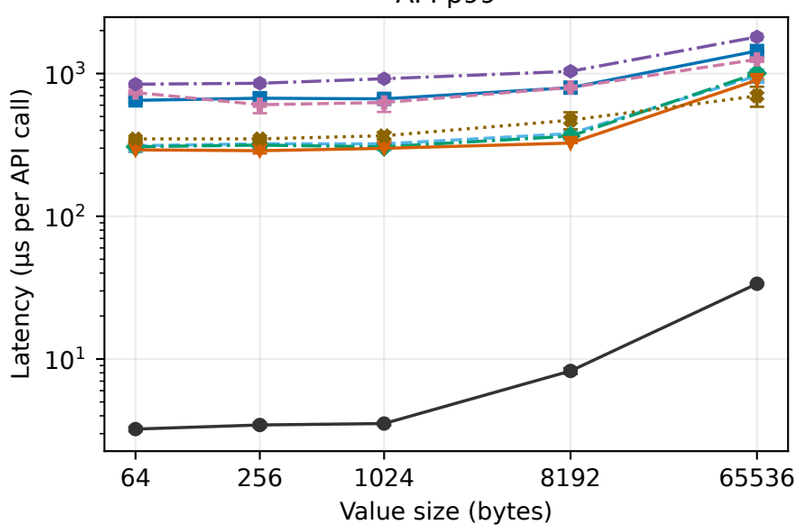


Response p99

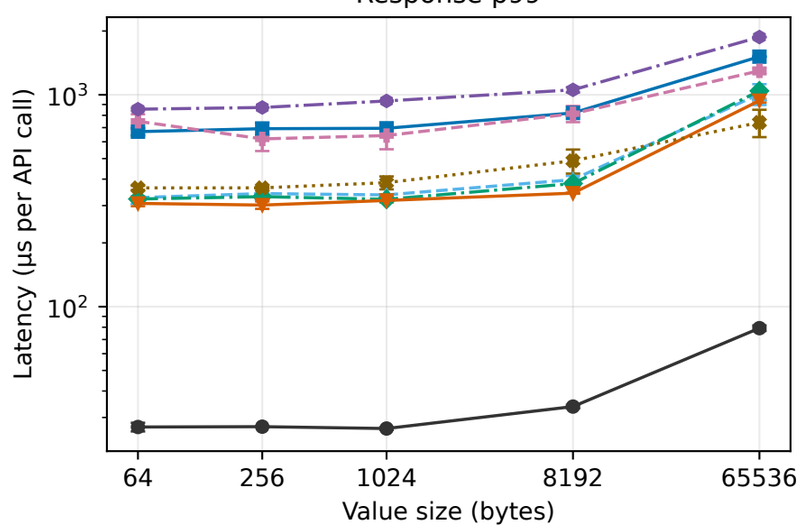


Whole-workload successful calls

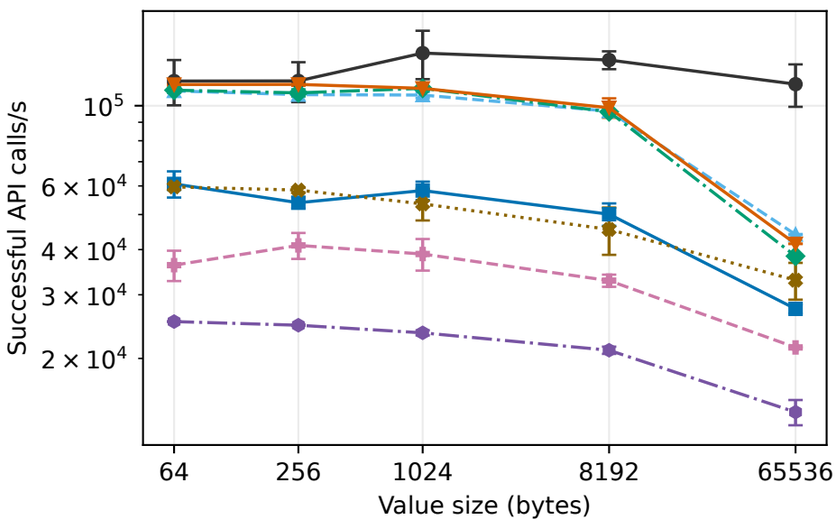


Successful logical keys

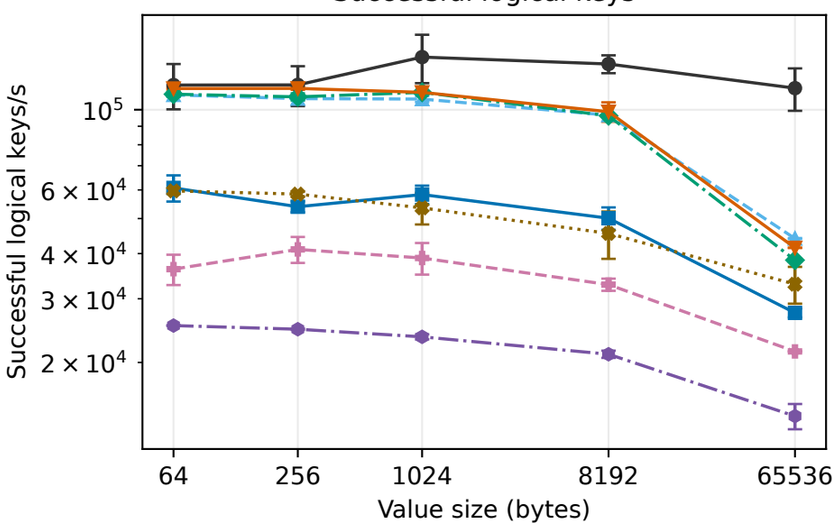


Successful value payload

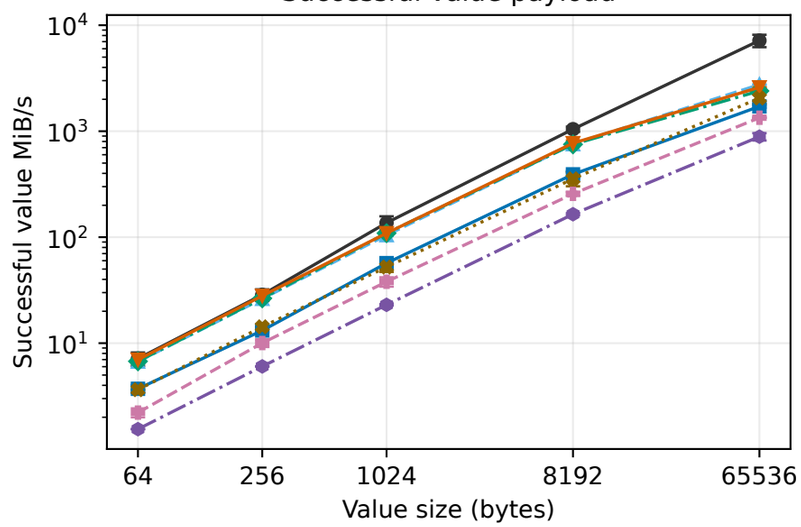


Closed-loop c16; all five value sizes. One key per API call. Points: median of matched per-repeat values; whiskers: observed run min/max, NOT confidence intervals. No pooled quantiles; few repetitions support no confidence claim. Successful latency is conditional on operation/outcome. RF1 does not equalize consistency, durability, security, or transaction semantics. Primary RF1 only: native uses value_wal_barrier and TH explicit caches are off; other cohorts use their stated settings. Warm OS is not guaranteed cache residency. Tail quantiles are descriptive, including small populations.