Native pagecache versus value-WAL barrier — distinct durability
Matched repeats r0, r1

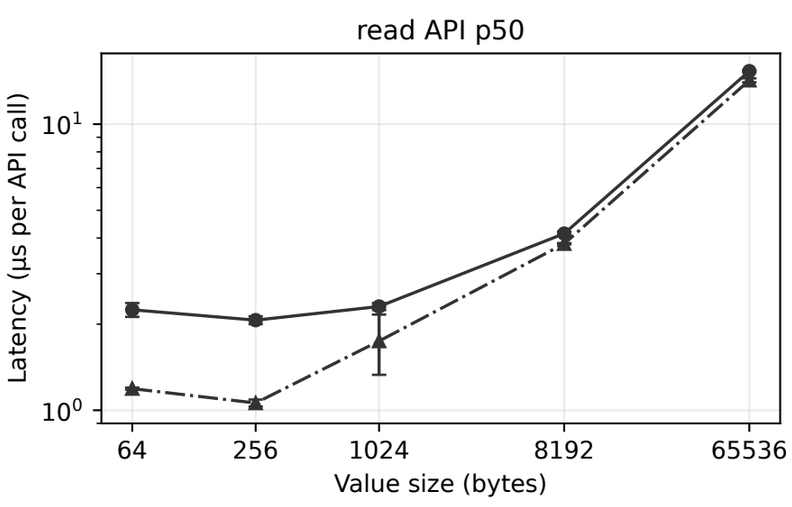

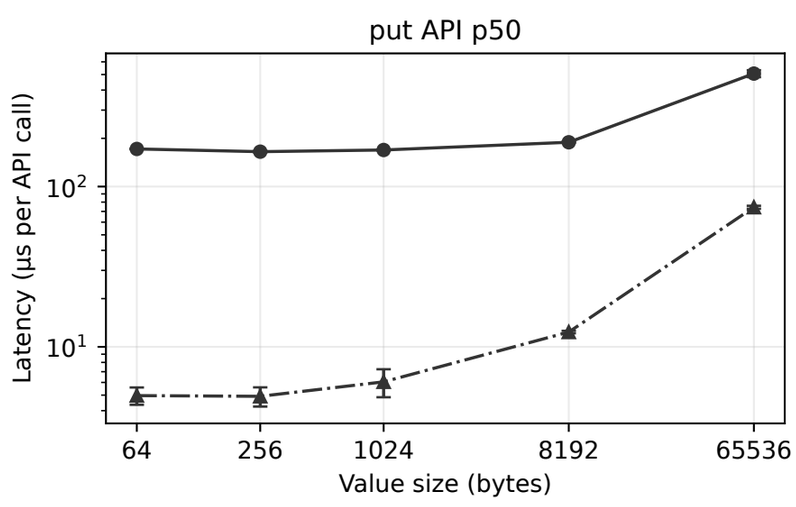

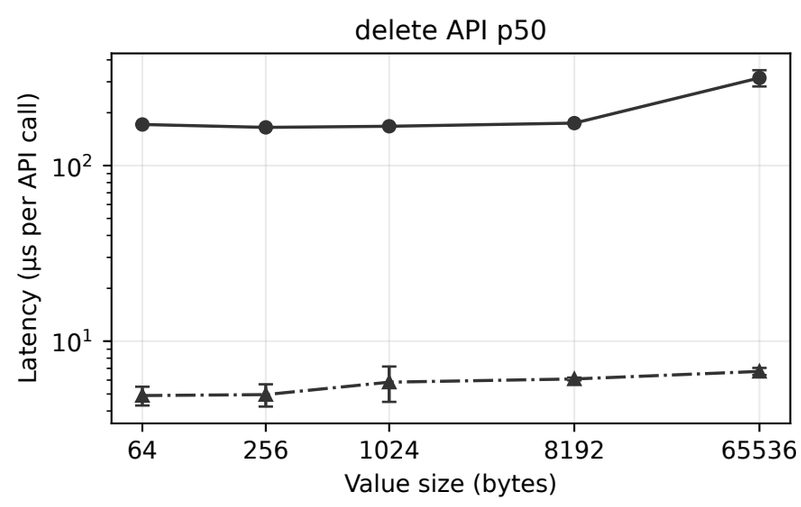

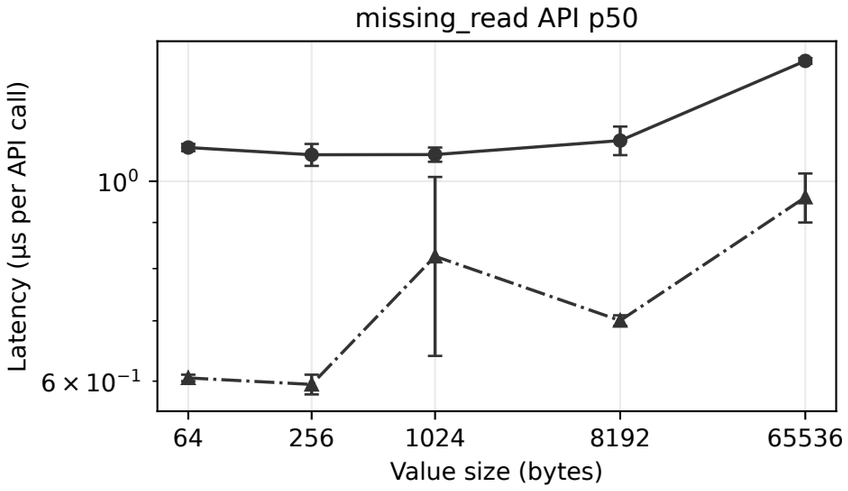

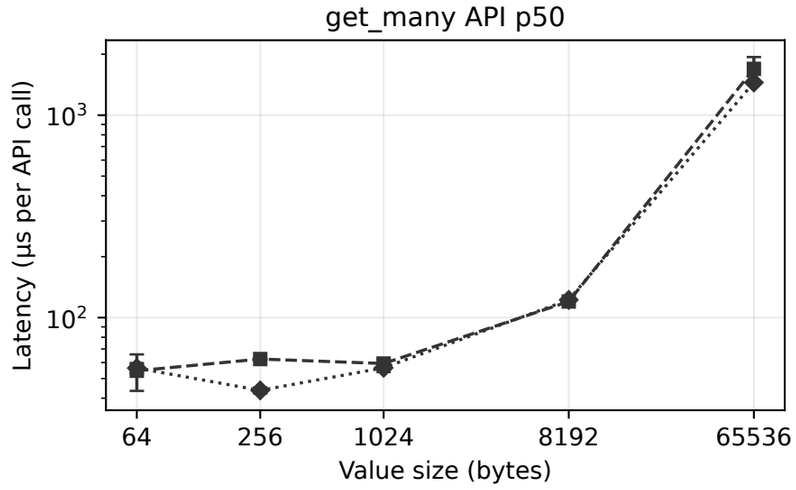

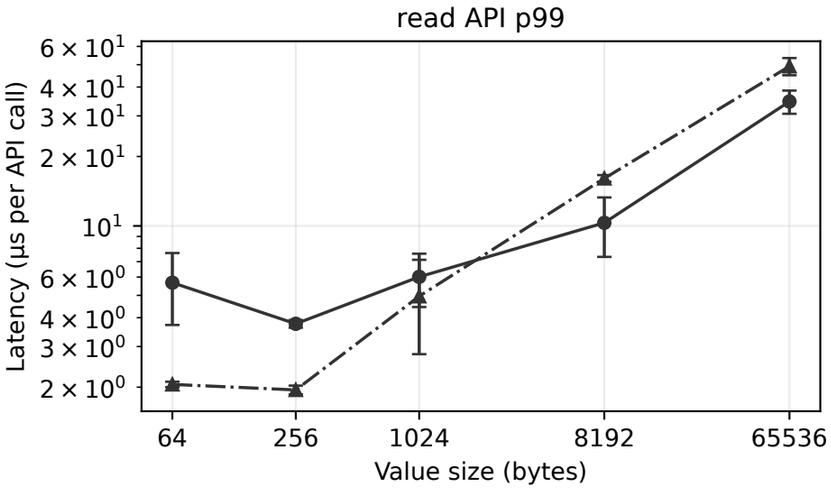

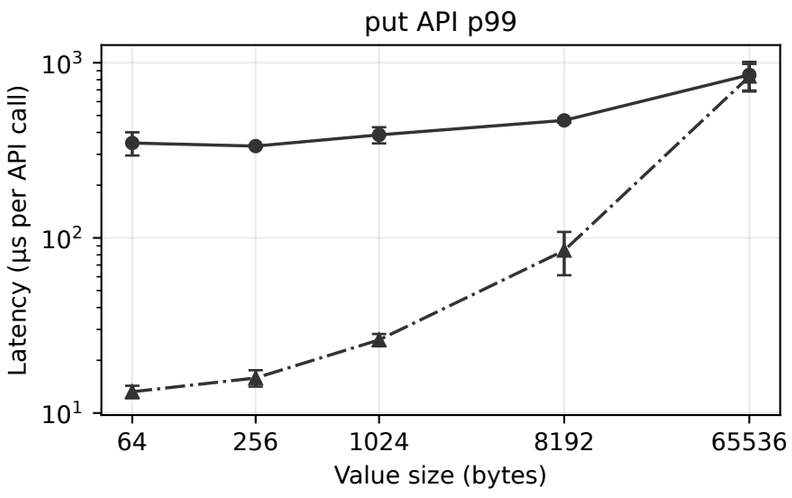

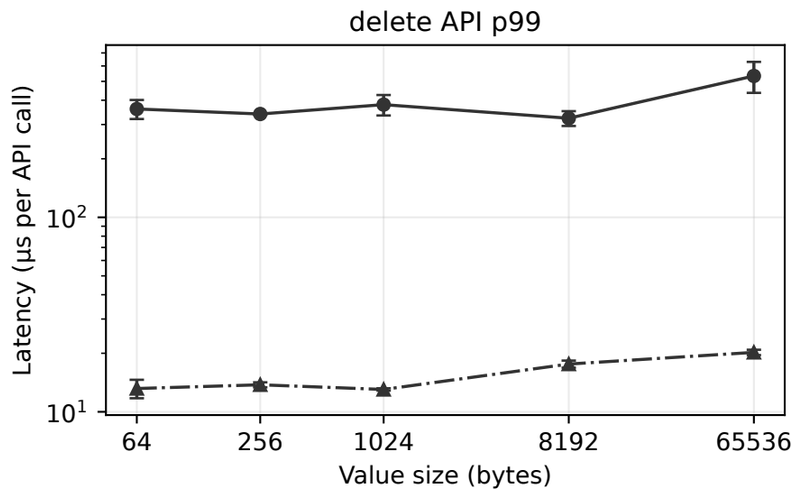

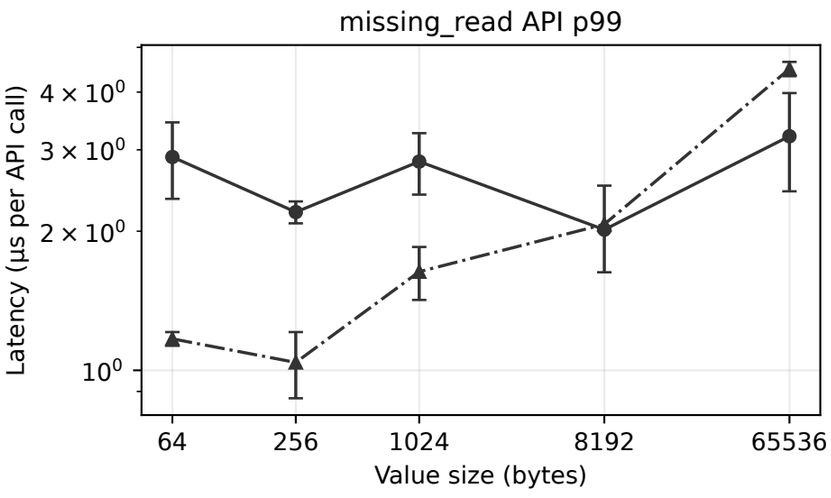

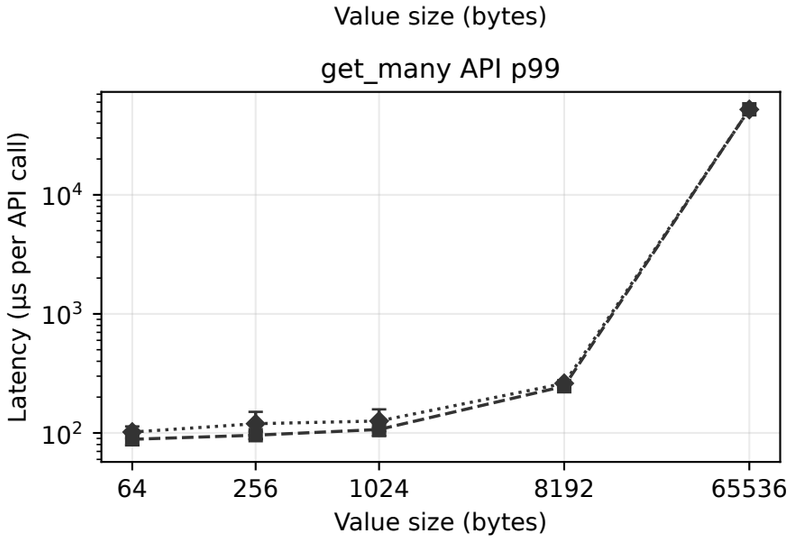

Native-only durability extras; pagecache acknowledgment is not equivalent to value_wal_barrier. Point-mixed c1 operations are separate; get_many c16 is one 32-key call. Both modes can use Linux page cache for reads. Points: median of matched per-repeat values; whiskers: observed run min/max, NOT confidence intervals. No pooled quantiles; few repetitions support no confidence claim. Successful latency is conditional on operation/outcome. RF1 does not equalize consistency, durability, security, or transaction semantics. Primary RF1 only: native uses value_wal_barrier and TH explicit caches are off; other cohorts use their stated settings. Warm OS is not guaranteed cache residency. Tail quantiles are descriptive, including small populations.