Offered load — 1 KiB, c32
Matched repeats r0, r1

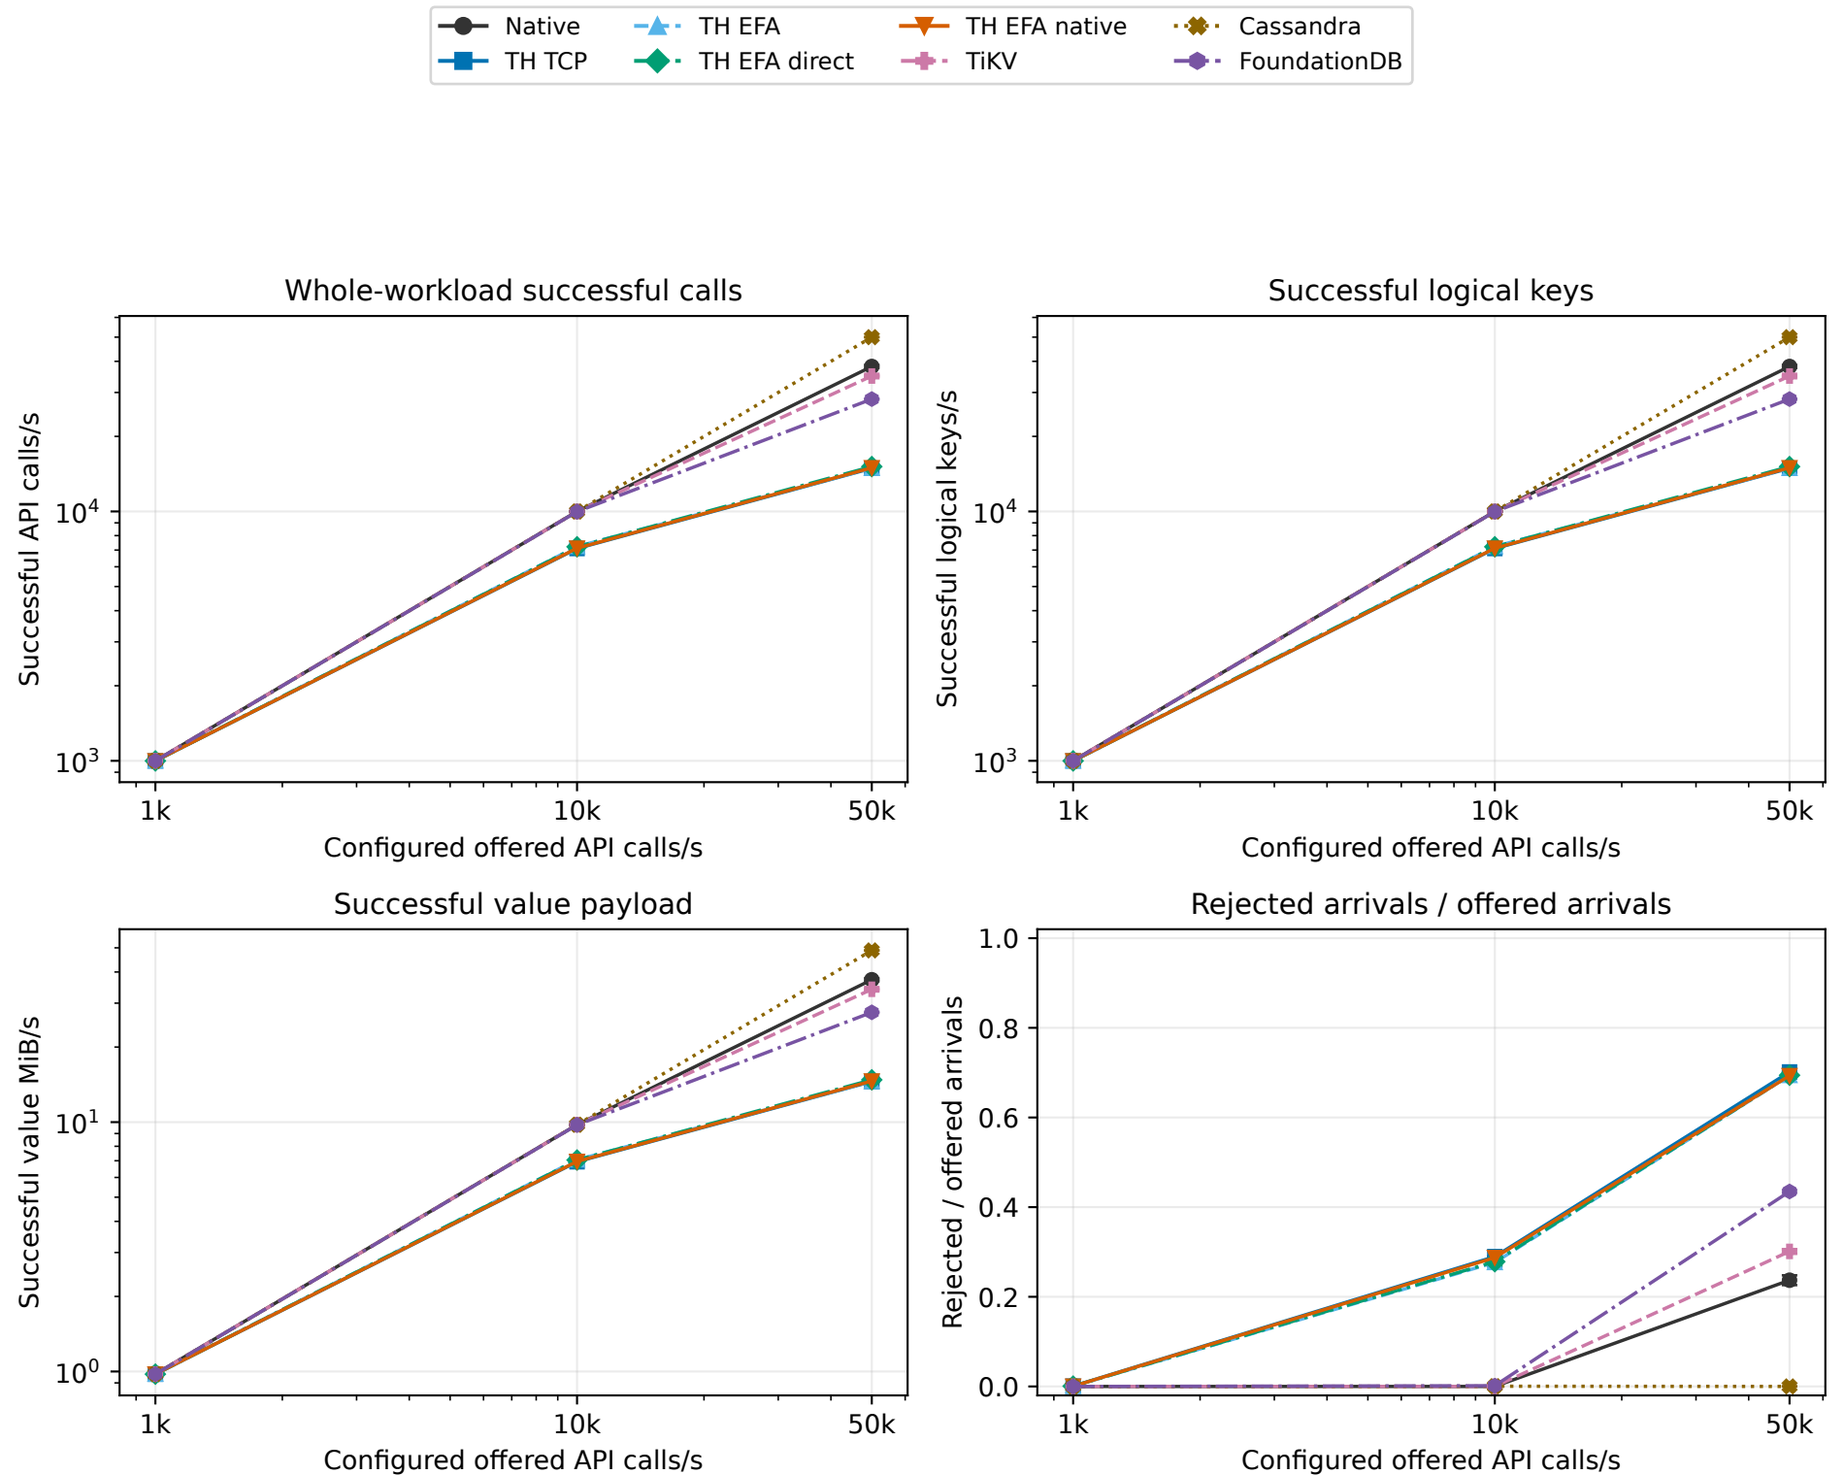

Open-loop 70% read / 30% put; c32 dispatch bound; configured arrival rates, not achieved throughput, on x. Rejection fractions retain ALL offered arrivals in the denominator. Goodput uses observed measurement span. Points: median of matched per-repeat values; whiskers: observed run min/max, NOT confidence intervals. No pooled quantiles; few repetitions support no confidence claim. Successful latency is conditional on operation/outcome. RF1 does not equalize consistency, durability, security, or transaction semantics. Primary RF1 only: native uses value_wal_barrier and TH explicit caches are off; other cohorts use their stated settings. Warm OS is not guaranteed cache residency. Tail quantiles are descriptive, including small populations.