Read-many32 — primary RF1, c16
Matched repeats r0, r1

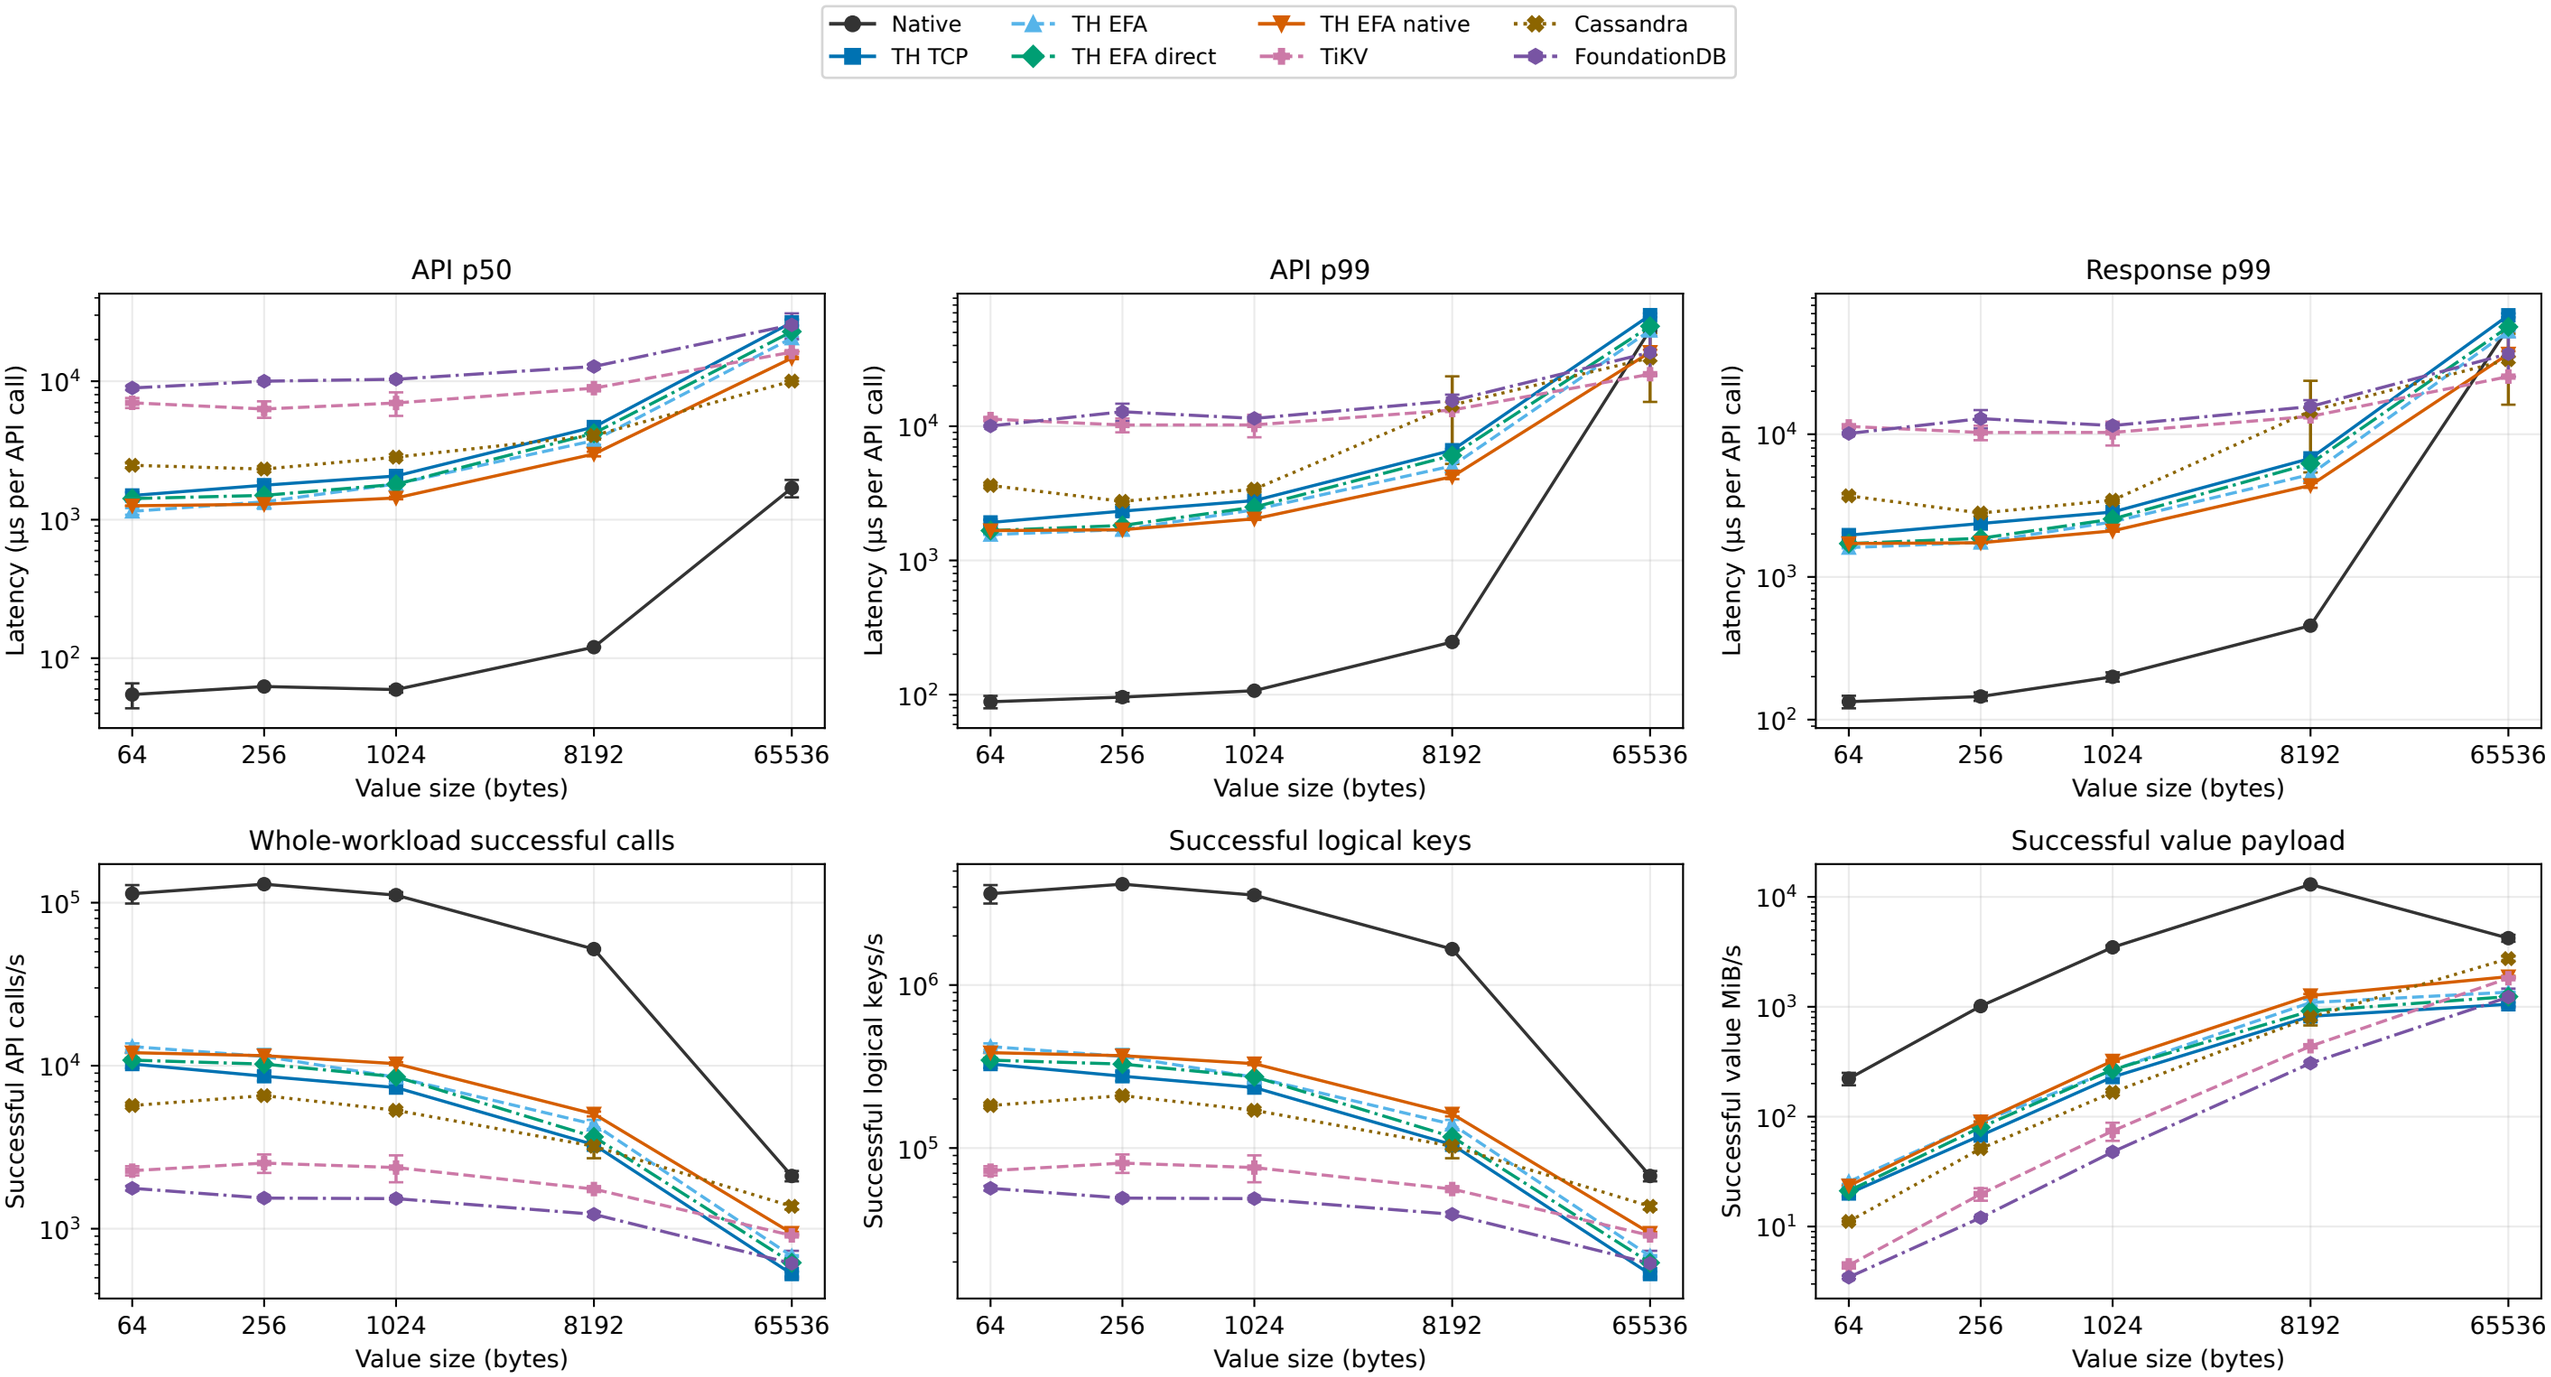

Closed-loop c16; all five value sizes. Get-many latency is PER CALL of 32 keys, not per key. FoundationDB performs 32 sequential transaction gets.
Points: median of matched per-repeat values; whiskers: observed run min/max, NOT confidence intervals. No pooled quantiles; few repetitions support no confidence claim. Successful latency is conditional on operation/outcome. RF1 does not equalize consistency, durability, security, or transaction semantics. Primary RF1 only: native uses value_wal_barrier and TH explicit caches are off; other cohorts use their stated settings.
Warm OS is not guaranteed cache residency. Tail quantiles are descriptive, including small populations.