



```
∨ Image routes

   +layout.js
   +layout.svelte
 +page.svelte
  +page.svelte

∨ r
events

        +page.svelte
```

```
const availableLanguages = ["en", "ar", "jp"]
/**
 * Oparam {any} lang
 * @returns {lang is "en" | "ar" | "jp"}
 */
export const match = lang ⇒
    availableLanguages.includes(lang)
```

Internationalised Routing in SvelteKit

Storing the language in the URL


```
/en/about ex
/de/about ex
/fr/about ex
```

```
example.com/about example.de/about example.fr/about
```

example.com/about de.example.com/about fr.example.com/about

Add a language Parameter

Add a matcher

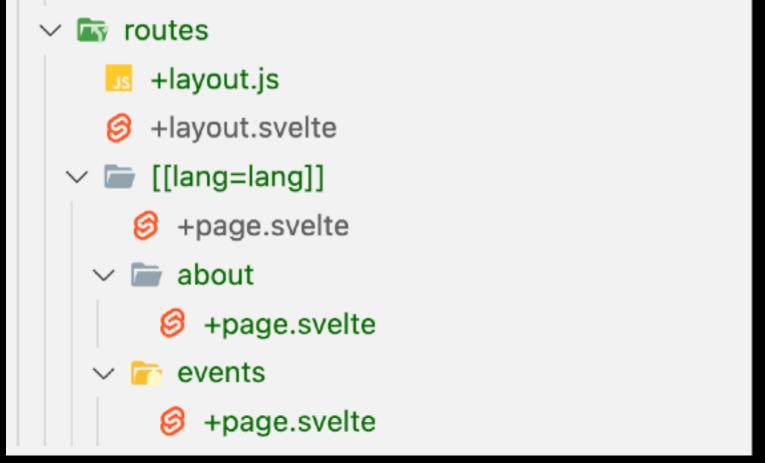

src/params/lang.js

```
const availableLanguages = ["en", "ar", "jp"]

/**

* @param {any} lang

* @returns {lang is "en" | "ar" | "jp"}

*/

export const match = lang ⇒

availableLanguages.includes(lang)
```

src/routes/+layout.js

Internationalised Routing in SvelteKit

Detecting the Language on the Server

```
/**
 * @param {import("@sveltejs/kit").RequestEvent}
* @returns {string}
function getLanguage(event) {
    return event.params.lang ?? sourceLanguageTag
export async function handle({ event, resolve }) {
    event.locals.lang = getLanguage(event)
    return resolve(event);
```