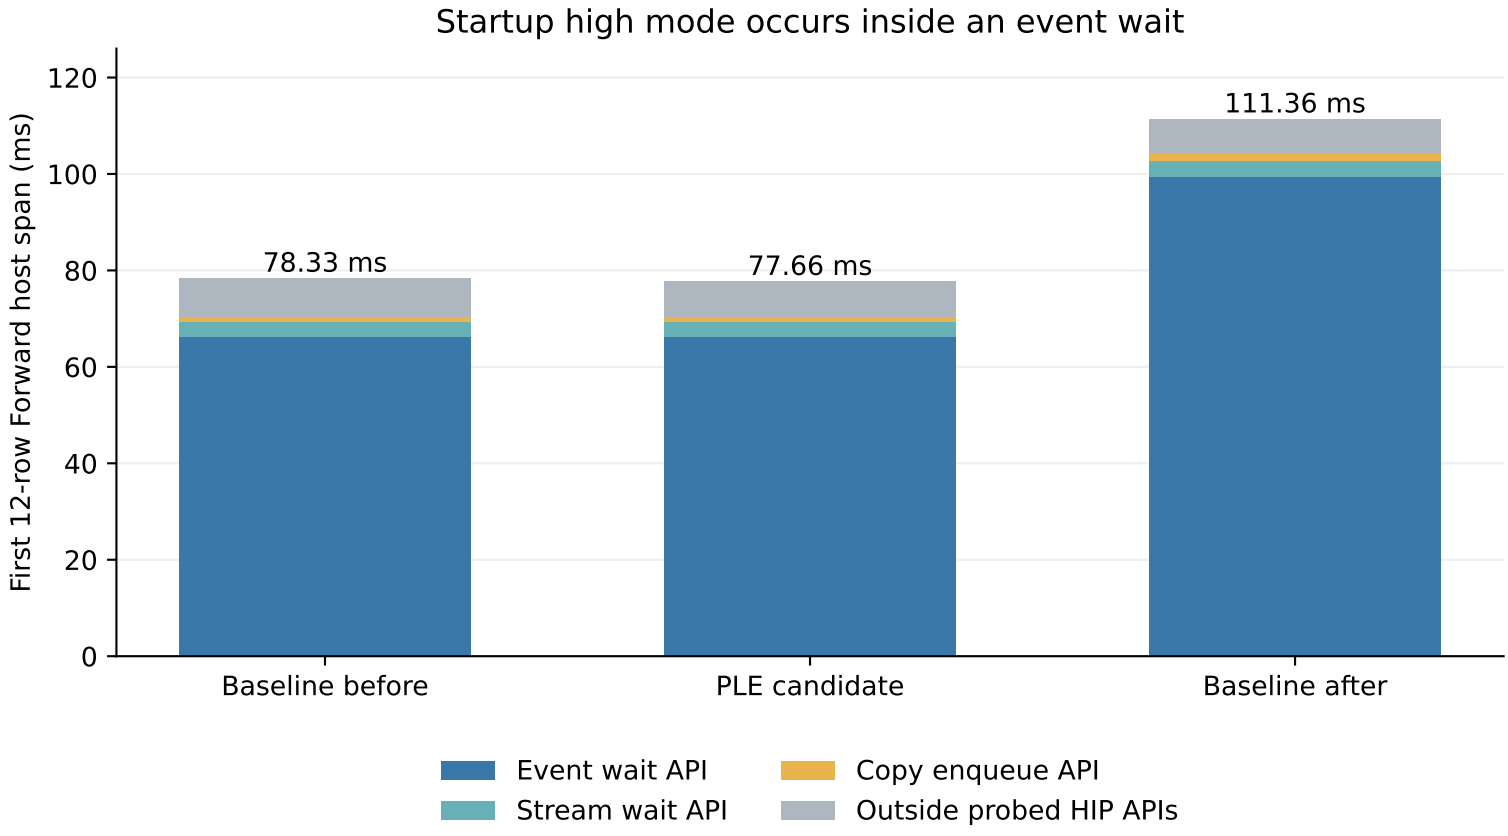
Startup high mode occurs inside an event wait
First 12-row Forward host span (ms)
0
20
40
60
80
100
120
78.33 ms
77.66 ms
111.36 ms
Baseline before
PLE candidate
Baseline after
Event wait API
Stream wait API
Copy enqueue API
Outside probed HIP APIs
Host intervals; waits include GPU/peer progress. Not a GPU busy/idle split.