

Efficient Thinking: Tradeoffs in Game-Playing AI

Parameters vs. Search vs. Self-Learning — a Three-Stage Chess Study
of Where Strength Comes From

Louay Alsakka

louayalsakka@gmail.com

Code, trained model, and figures: <https://github.com/LouayAlsakka/efficient-thinking>

July 2026

Abstract

We study how playing strength in chess arises from three separable sources—**network capacity**, **search**, and **self-learning**—using a deliberately tiny model on modest hardware. A **3.45 M-parameter (14 MB) convolutional network** plays at ~ 2150 Elo as a single-pass policy; adding **Monte-Carlo Tree Search (MCTS)** lifts the *same weights* to ~ 2800 -class strength with **zero extra parameters**—strength bought with compute, not parameters. We make three further contributions. (1) A direct **MCTS-vs-fixed-depth** comparison: adaptive MCTS both beats alpha-beta at equal compute and keeps scaling, while fixed-depth search plateaus. (2) A **search-efficiency** result: an all-MCTS wide $\rightarrow$ narrow *cascade* that funnels the simulation budget through progressively narrower, deeper stages matches flat-MCTS strength while running up to $\sim 4.8\times$ faster per move. (3) A **teacher-free self-learning** study (self-play, a self-referential ladder, evolution, and committees) with one robust positive and sober negatives: model *agreement* predicts correctness (a confidence signal needing no oracle), but none of these methods—including outcome-based evolution—crosses the self-play plateau, and plurality voting does not reliably de-bias. Since the same network reaches higher under supervised labels, the wall is the quality of *self-generated* signal, not capacity. Throughout, the unifying finding is that **the learned evaluator is the bottleneck**: search and self-play *redistribute* the network’s knowledge; they do not manufacture it.

Note on numbers. Absolute Elo is measured against a Stockfish ladder and carries systematic uncertainty (± 100) near the top rung; the *relative* results (MCTS-vs-fixed, the cascade curve, the Stage-3 negatives) are the robust claims, and “ ~ 2800 ” is an efficiency indicator, not an engine-matching claim.

1 Introduction

Modern game AI conflates three separable questions: (1) *open loop*—how strong is a single forward pass (pure “intuition”)? (2) *closed loop*—how much does search (lookahead on a learned value function) add? (3) *self-learning*—can the system improve itself with no external teacher? We treat these as three stages of increasing autonomy and measure each independently. The framing is control-theoretic [1]: the open-loop policy is a feedforward controller, closed-loop search is model-predictive control (receding-horizon planning with a learned terminal cost), and self-play is iterative/adaptive learning control. Chess is only a testbed; the goal is a generic recipe for sequential decision-making.

Contributions.

- A parameter-efficiency result: ~ 2800 Elo from 3.45 M parameters via search, at constant memory.
- A direct **MCTS-vs-fixed-depth** result: adaptive search beats and out-scales fixed depth.
- A **search-efficiency** result: a wide $\rightarrow$ narrow MCTS cascade matches flat MCTS at up to $\sim 4.8\times$ less compute per move.
- An **architecture-beats-scale** finding (convolution $\gg$ MLP at equal data).
- A reproducible **negative result** on small-scale self-learning: self-play, a self-referential ladder, evolution, and plurality-voting committees all fail to cross the plateau, with a methodological warning that noisy fitness manufactures phantom gains.

2 Problem Setup and Methods

Representation. Position $\rightarrow$ move as a 4096-way (64×64 from-to) classification; promotions default to queen. The board is always presented from the mover’s perspective (mirror + color-swap for Black), so one network serves both players. Encoding: $64 \text{ squares} \times 12 \text{ piece planes} + 5 \text{ meta bits} = 773 \text{ floats}$; for convolution this reshapes to $8 \times 8 \times 12 \text{ piece planes} + 5 \text{ meta planes} (= 17 \text{ input channels})$.

Labels and objective. Supervised data is the public Lichess cloud-eval database ($\sim 394 \text{ M}$ positions), each with Stockfish multi-PV win-probabilities. The *hard* objective is cross-entropy to the single best move; the *soft* objective is cross-entropy to an advantage-weighted distribution over legal moves ($\text{softmax}(v_i/\tau)$), which is not bounded by copying one move and generalizes better.

Evaluation. Elo via a Stockfish ladder (random baseline, then Stockfish at set UCI_Elo rungs), fit by maximum likelihood against the known rung ratings. If the player beats the top rung the estimate compresses, so we raised the ladder as the player improved ($1700 \rightarrow 2100 \rightarrow 2700 \rightarrow 3000$); relative gains on the *same* ladder are the robust results. Where two methods are compared they are always run on the same ladder, seeds, and openings.

Hardware. Two Apple-Silicon Mac Studios (M3 Ultra, 256 GB each), MLX framework [2], 40 Gbps bridge.

3 Stage 1 — Open Loop (single-pass policy)

Topology sweep. At fixed data (18 M positions) we swept eight architectures (Table 1). Only two shapes are competitive—constant-width and convolution—and every taper, factoring, or exotic bottleneck loses badly, because a taper destroys positional information before the head can use it while convolution reuses local tactical patterns across the board via weight sharing. A 3.45 M-parameter conv matched a 14.4 M-parameter MLP using $22\times$ less data: architecture, not parameter count, sets the strength.

Topology	Params	Elo	Note
conv (64×10 / 96×8)	2.8–3.4 M	1476	best & most efficient
constant-width MLP (1024×6)	10.2 M	1108–1233	best plain MLP
dual-path (wide+deep, gated)	2.8 M	1082	ties MLP at 3.5× fewer params
factored head (from/to)	6.2 M	782	−450
funnel (1024→64)	1.8 M	582	narrowing hurts
pyramid (64→1024)	5.0 M	431	bad
bottleneck (512→8)	0.5 M	340	broken

Table 1: Topology sweep. Convolution wins overall; tapers and bottlenecks collapse.

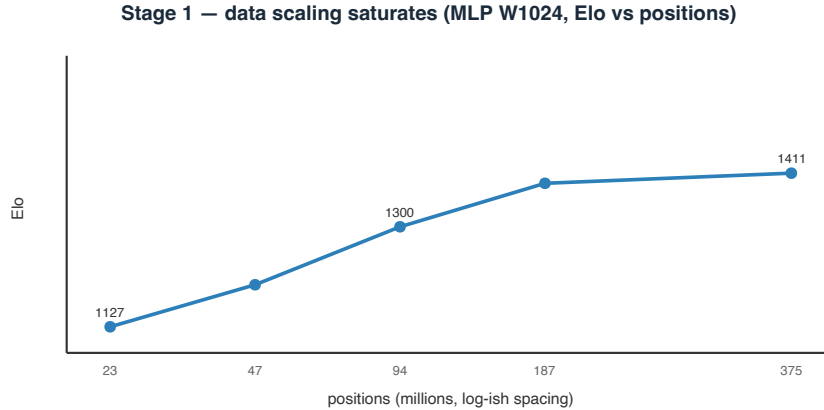


Figure 1: Stage 1: single-pass strength saturates with data (MLP W1024).

Scaling and ceiling. Width shows sharply diminishing returns (W1024→1449; W2048→1501: +52 Elo for 3.3× params). Data scaling saturates near the database’s 394 M limit (Figure 1). The soft objective beats hard by +94–113 Elo. The best open-loop recipe (conv + soft + full data) has a ceiling ≈ 2150 Elo at 3.45 M params, 14 MB, ~ 176 MFLOP / ~ 1.5 ms per move—cheap, but capped.

4 Stage 2 — Closed Loop (search on a value function)

We add a scalar head $\text{Eval}(N) \in [0, 1]$ = expected score for the side to move, trained on the eval-DB win-probabilities (held-out MAE 0.088, correlation 0.877). Search uses the zero-sum complement identity: our value after a move is $1 - \text{Eval}(\text{child})$, so one network plays both sides; terminal nodes return exact 0/0.5/1.

MCTS vs. fixed depth. Fixed-depth alpha–beta (with policy move-ordering and quiescence) rises then plateaus ~ 2550 ; 1-ply search actually *hurts* a strong policy (−34 Elo, it commits to a capture without seeing the recapture). Adaptive MCTS/PUCT both beats alpha–beta at equal compute and keeps scaling to ~ 2800 (Table 2, Figure 2). Fixed uniform depth spends the same effort on every branch and amplifies the value net’s noise at the leaves; MCTS allocates search adaptively to sharp lines and averages over that noise.

Search efficiency — the cascade. Given that MCTS wins, we ask whether the *allocation* of a fixed simulation budget matters. The cascade runs MCTS in stages with different knobs: a

depth	raw	search		
1	1661	1627		
2	1685	1788		
3	1895	2005		
4	1914	2152		
6	2128	2575		
7	2187	2513		
alpha-beta (plateau ~ 2550)				

sims	search Elo
100	2411
200	2530
400	2610
800	2749 (~ 2800)
MCTS (keeps rising)	

Table 2: Fixed-depth search plateaus; MCTS out-scales it on the same value net and ladder.

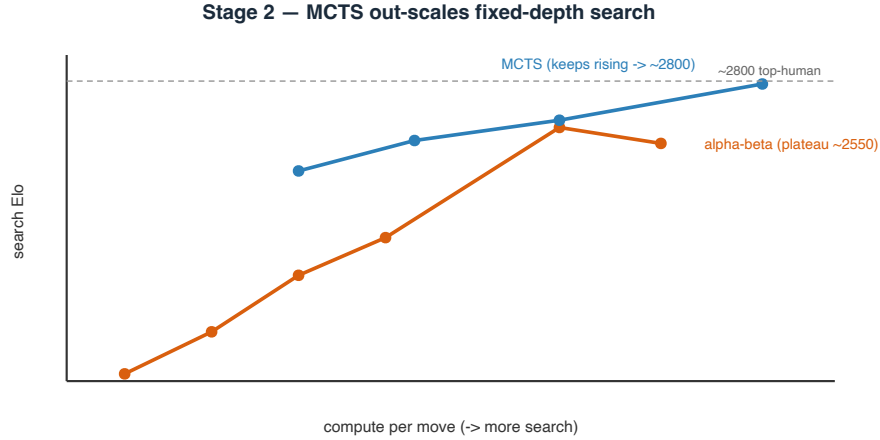


Figure 2: Stage 2: MCTS beats and out-scales fixed-depth search.

wide stage (all moves, high c_{puct} , few sims) ranks broadly and passes its top- k by visit count to a narrower, deeper stage, funnelling the budget onto the survivors (shared evaluation cache across stages). A controlled $N = 1 \rightarrow 10$ sweep (all 800 total sims; same ladder) shows the Elo stays inside a single ± 89 noise band (range 2506–2683, mean ~ 2580)—statistically flat—while speed improves monotonically to $4.8\times$ at $N = 10$ (Figure 3). Funnelling the budget wide $\rightarrow$ narrow is therefore a near-pure efficiency win: the survivors that reach the deep stages are the same moves flat MCTS would have spent its budget on anyway. (A fixed-depth *beam* cascade, by contrast, is a genuinely weaker primitive at 2487—adaptive MCTS stages matter.)

Two-dimensional cost. Stage 1 buys Elo with *memory* and saturates (~ 2150 , 14 MB, one pass); Stage 2 buys Elo with *GPU cycles* and keeps climbing (~ 2800 , 14 MB, ~ 800 passes ≈ 1 s—or ~ 0.6 s cascaded). Strength is compute, not parameters.

5 Stage 3 — Self-Learning (no external engine, no labels)

Stages 1–2 leaned on Stockfish labels, which only exist because chess already has a superhuman evaluator and a labeled database. The generic goal is the opposite: a new field where *no training data and no evaluator exist*—a novel game, an unsolved control problem, a design task. There you cannot imitate a teacher and cannot score positions with an off-the-shelf engine; the only input is the environment’s rules. Stage 3 discards every external crutch to test whether strength can be bootstrapped from self-play and outcomes alone—the transferable question, since Stages 1–2 are

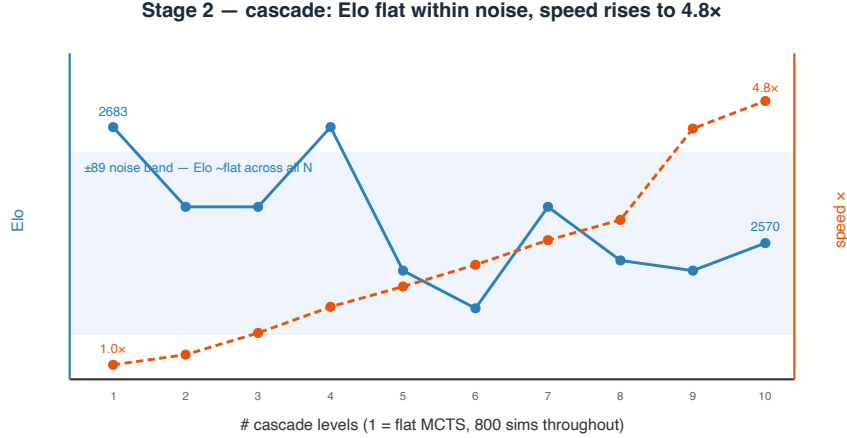


Figure 3: Stage 2: the wide→narrow cascade holds Elo (within noise) while cutting per-move compute up to 4.8x.



Figure 4: Stage 3: self-play plateaus below the supervised baseline.

simply unavailable for a genuinely new problem.

Self-play. AlphaZero-style expert iteration [4] (MCTS self-play → train toward visit-distribution policy + game-outcome value → repeat). Two failure modes appeared and were fixed (cold-start draw-collapse; warm-start catastrophic forgetting), but the raw policy plateaus ~1950–2030—below the ~2150 supervised baseline (Figure 4). Self-play strength does rise with game volume, but the achievable volume here plateaus under a 394 M-supervised net; scale is the binding constraint.

Committee / diversity. If the bottleneck is the evaluator, a cheap way to improve one without a bigger net is to ensemble diverse nets. We tested whether multiple independently-trained models diverge (disagree ⇒ uncertain) or converge (agree ⇒ likely correct). *Agreement strongly predicts correctness* (Figure 5): over 400 positions scored against Stockfish depth-12, unanimity reaches 65–94% top-move accuracy vs. 17–37% when members disagree—a validated, self-contained confidence meter. However, plurality *voting* does not reliably de-bias: across a committee-size sweep (Table 3, Figure 5) the consensus is slightly *worse* than the best single member at every size (gaps within the $\sim \pm 3$ CPL measurement noise), *balance beats count* (adding correlated same-family members lets that bloc dominate the vote and reverts the gain), and the per-position oracle is 2–3x better

agents	consensus CPL	best member	oracle
3 (conv-soft $\times 3$)	54.7	49.8	29.6
5 (+MLP +hard)	48.0	46.8	22.2
7 (+2 data-slice conv)	54.8	52.2	20.8
9 (+MLP +hard)	56.0	53.1	19.9

Table 3: Committee-size sweep (centipawn loss, lower better). Plurality never clearly beats the best member; balance ($N=5$) beats count; the oracle headroom is unrealized.

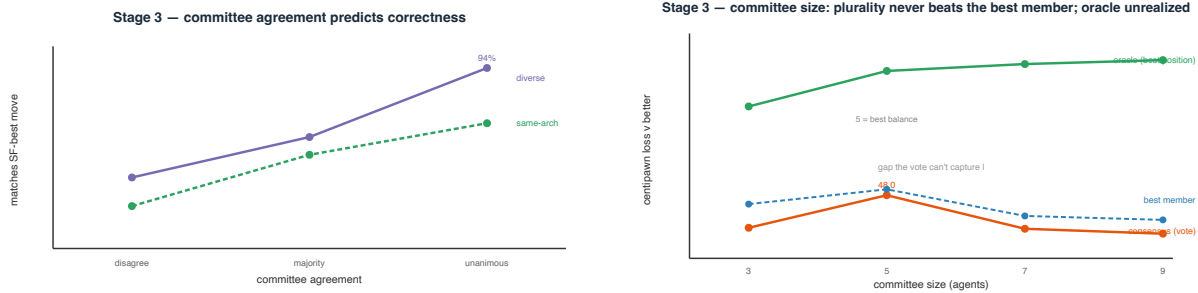


Figure 5: Left: committee agreement predicts correctness (robust). Right: plurality voting never beats the best member, and adding correlated members reverts the gain.

than the vote—the diversity contains the information, but plurality cannot extract it.

Evolution (mutate / play / score). Gradient self-play optimizes a proxy (the net’s own biased value targets); we tested whether derivative-free evolution, optimizing the true objective—did this mutant win games—could escape the plateau. From the plateaued net, each generation mutates it into 16 offspring (Gaussian weight noise), plays each against a *frozen copy of the plateaued net* (a fixed anchor, so “fitness” is “how well do you beat the plateau”), and crowns the best only if it survives a larger confirmation match. A naive version selecting against the *moving* champion drifted downward—beating your immediate parent is non-transitive in chess. **The result is a null result and a methodological warning** (Figure 6): the run *appeared* to escape (+47 Elo, passing a 120-game confirmation), but a clean 400-game low-temperature re-match found the “evolved” champion is actually -24 to -41 Elo *worse*—a phantom improvement from noisy, high-temperature fitness with best-of-16 selection bias. Annealing the mutation scale up ($\sigma : 0.03 \rightarrow 0.12$) found nothing better. So evolution did not escape either, and neither gradient self-play, a self-referential ladder, nor evolution crosses the ~ 2000 wall.

6 Comparison to Existing Systems

Our net is $\sim 10\text{--}25\times$ smaller than AlphaZero and $30\text{--}100\times$ smaller than large Leela transformers [5, 4, 3, 6], yet reaches ~ 2800 with search—the extreme point on Elo-per-parameter (Figure 7). The two paradigms differ in speed: AlphaZero/Leela use a similar sim count but each sim is a big-net pass, so their per-move cost is dominated by a $10\text{--}100\times$ larger network; Stockfish is the opposite regime—a small quantized net at millions of alpha-beta nodes/second. The common structure: strength = evaluator $\times$ search; every strong engine is search-heavy, and parameter count is not what separates them. (Honest gap: top engines are $\sim 600\text{--}800$ Elo above ~ 2800 , from far more search *and* a much better value net.)

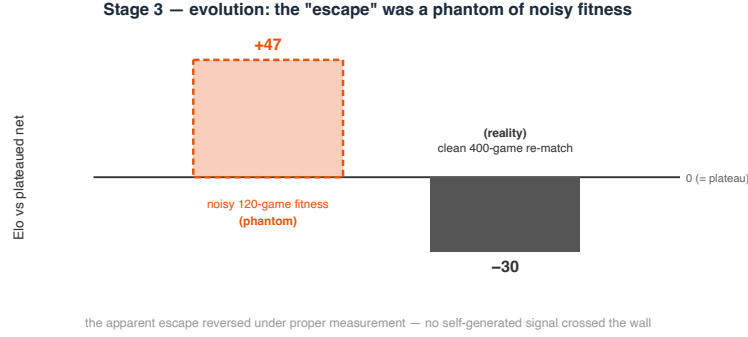


Figure 6: Stage 3: the evolution “escape” was a phantom—noisy fitness said +47 Elo, a clean re-match said −30.

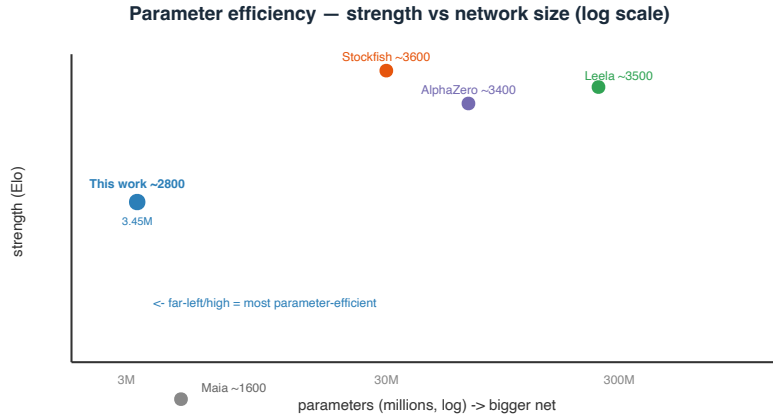


Figure 7: Parameter efficiency: strength vs. network size (log scale). This work is the far-left/high (most efficient) point.

7 Discussion

Across all three stages one result recurs: **the ceiling is the evaluator, not the loop around it.** (i) *Architecture > parameters*: the right prior beats raw width. (ii) *Search > scale, at constant memory—but search cannot exceed the net*: flat MCTS and the cascade hit the same ~ 2691 wall on the same ladder because they query the same value net; search reduces the net’s *variance* (via averaging) but not its *bias*, and deep uniform search even amplifies bias. (iii) *No self-generated signal crosses the wall—we tried three*: gradient self-play, a self-referential ladder, and evolution all fail, and since the same net reaches ~ 2150 under supervised labels the wall is not capacity but the ceiling of any signal a system generates about *itself*. (iv) *A better evaluator is the only lever—but it is harder than it looks*: the committee gives a robust confidence signal, yet plurality voting does not reliably de-bias; capturing the oracle headroom needs a better aggregator (soft-averaging / confidence routing) and balanced, not merely numerous, diversity.

8 Limitations and Future Work

Absolute Elo carries systematic uncertainty near the ladder top; relative same-ladder gains are the robust claims. Stage 3 is compute-limited (two machines) and characterizes the small-scale regime;

relative-fitness selection with small stochastic samples produced a phantom evolution “escape” that reversed under a 400-game re-match, and plurality de-biasing gaps sit inside the measurement noise. Priorities: (1) a better value function—the true ceiling—via more/better search-labeled data or large-scale self-play; (2) a better ensemble *aggregator* (soft-averaging, confidence routing) with balanced cross-family diversity; (3) batched/parallel MCTS and transposition tables; (4) endgame tablebases and tuned c_{puct} .

9 Conclusion

A 14 MB, 3.45 M-parameter network reaches ~ 2800 -class chess strength by *thinking* (MCTS search), not by *growing* (parameters); adaptive MCTS beats and out-scales fixed-depth search; and a wide $\rightarrow$ narrow cascade matches it at up to $4.8\times$ less compute. On the self-learning side the results are honestly negative: self-play, a self-referential ladder, and evolution all fail to cross the ~ 2000 plateau (evolution’s apparent escape was a noise artifact), and plurality-voting committees do not reliably de-bias—though model agreement is a robust teacher-free confidence signal. The transferable result, proven from every direction we pushed, is that the learned evaluator is the bottleneck: search redistributes its knowledge and self-generated signal cannot exceed its own quality; only a better evaluator raises the ceiling.

References

- [1] Dimitri Bertsekas. Lessons from AlphaZero for optimal, model predictive, and adaptive control. *arXiv preprint arXiv:2108.10315*, 2022.
- [2] Awni Hannun, Jagrit Digani, Angelos Katharopoulos, and Ronan Collobert. MLX: An array framework for Apple silicon. <https://github.com/ml-explore/mlx>, 2023.
- [3] Reid McIlroy-Young, Siddhartha Sen, Jon Kleinberg, and Ashton Anderson. Aligning super-human AI with human behavior: Chess as a model system. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 1677–1687, 2020.
- [4] David Silver, Thomas Hubert, Julian Schrittwieser, Ioannis Antonoglou, Matthew Lai, Arthur Guez, Marc Lanctot, Laurent Sifre, Dhharshan Kumaran, Thore Graepel, Timothy Lillicrap, Karen Simonyan, and Demis Hassabis. A general reinforcement learning algorithm that masters chess, shogi, and Go through self-play. *Science*, 362(6419):1140–1144, 2018.
- [5] The LCZero Authors. Leela chess zero. <https://lczero.org>, 2018–2024.
- [6] The Stockfish Developers. Stockfish: A strong open-source chess engine (nnue evaluation). <https://stockfishchess.org>, 2008–2024.