

COMP 8003

Lab 5

Testing

Louise Li
A01377263
Feb 9th, 2026


Tests

Test 1	3
Test 2	5
Test 3	7
Test 4	9
Test 5	12

Test	Expected	Actual	Screenshot
Run script as regular user	pass	pass	Test 1
Run script with existing .hidden_dir	fail	fail	Test 2
Run script with existing /etc/passwd copy within .hidden_dir	fail	fail	Test 3
Run script with insufficient write permissions to the home directory	fail	fail	Test 4
Run script with \$HOME unset	fail	fail	Test 5


Tests

Test 1

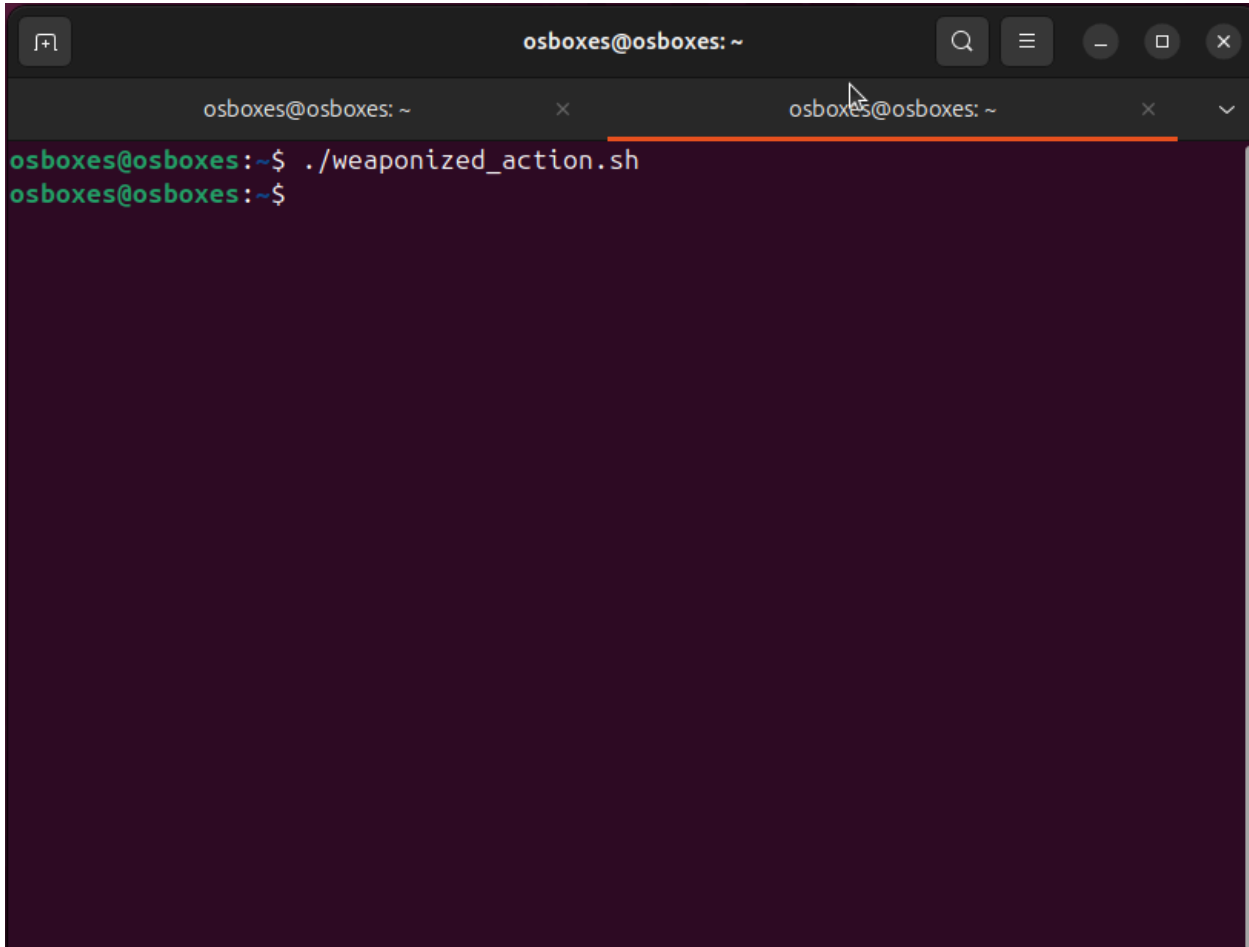

```
osboxes@osboxes: ~  
GNU nano 8.3 inotify.log  
/etc/passwd OPEN  
/etc/passwd ACCESS  
/etc/passwd CLOSE_NOWRITE,CLOSE  
/etc/passwd OPEN  
/etc/passwd ACCESS  
/etc/passwd CLOSE_NOWRITE,CLOSE  
  
[ Read 6 lines ]  
^G Help      ^O Write Out ^F Where Is  ^K Cut       ^T Execute   ^C Location  
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify   ^/ Go To Line
```

Test 2

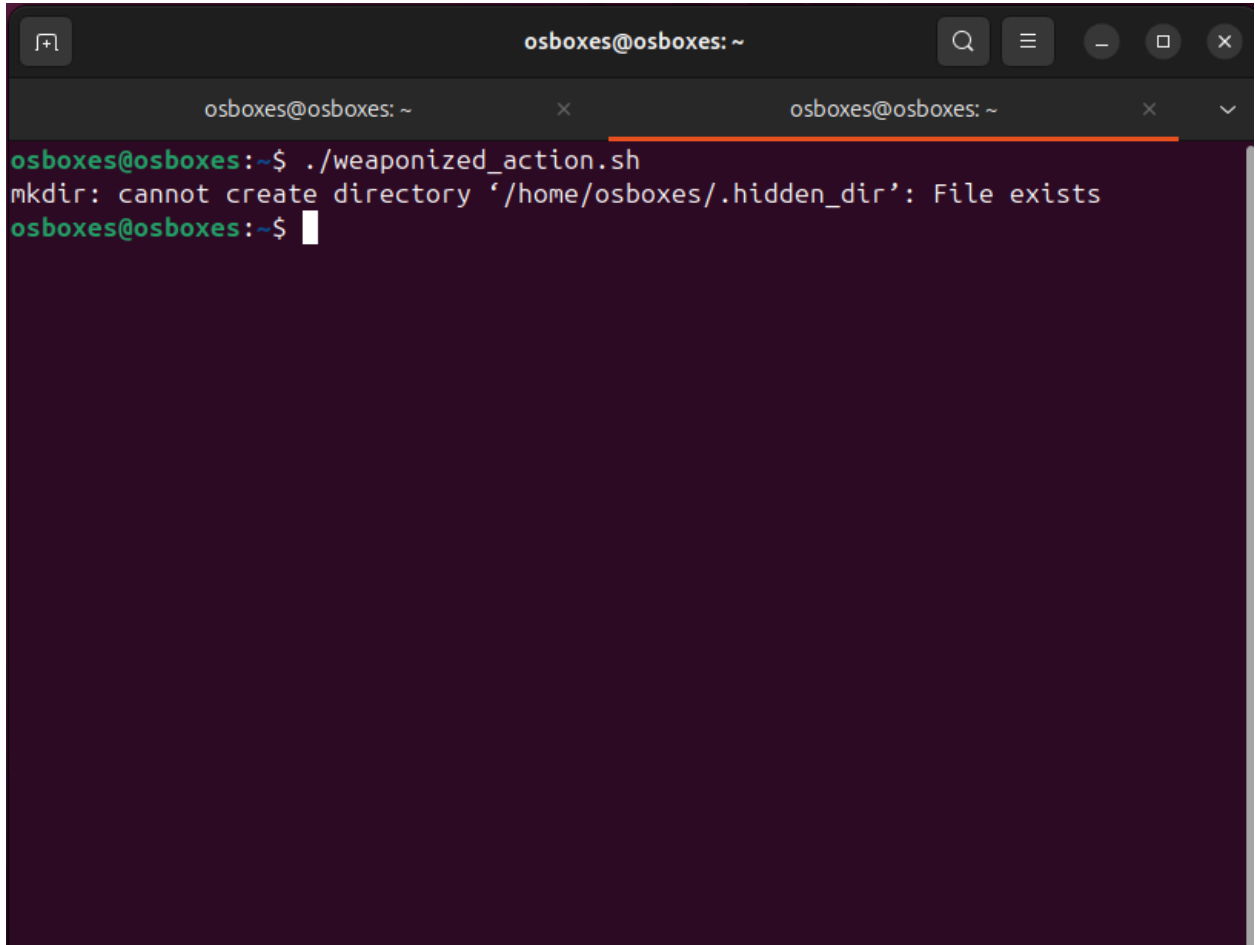


```
osboxes@osboxes: ~  
osboxes@osboxes: ~  
osboxes@osboxes:~$ ./weaponized_action.sh  
mkdir: cannot create directory '/home/osboxes/.hidden_dir': File exists  
osboxes@osboxes:~$
```

The image shows a terminal window with a dark background. The title bar at the top reads "osboxes@osboxes: ~". Below the title bar, there are two tabs, both labeled "osboxes@osboxes: ~". The terminal content shows a prompt "osboxes@osboxes:~\$" followed by the command "./weaponized_action.sh". The output of the command is "mkdir: cannot create directory '/home/osboxes/.hidden_dir': File exists". The prompt "osboxes@osboxes:~\$" is shown again on the next line, followed by a cursor.

```
osboxes@osboxes: ~  
GNU nano 8.3 inotify.log  
/etc/passwd OPEN  
/etc/passwd ACCESS  
/etc/passwd CLOSE_NOWRITE,CLOSE  
  
[ Read 3 lines ]  
^G Help      ^O Write Out ^F Where Is  ^K Cut       ^T Execute   ^C Location  
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify   ^/ Go To Line
```

Test 3

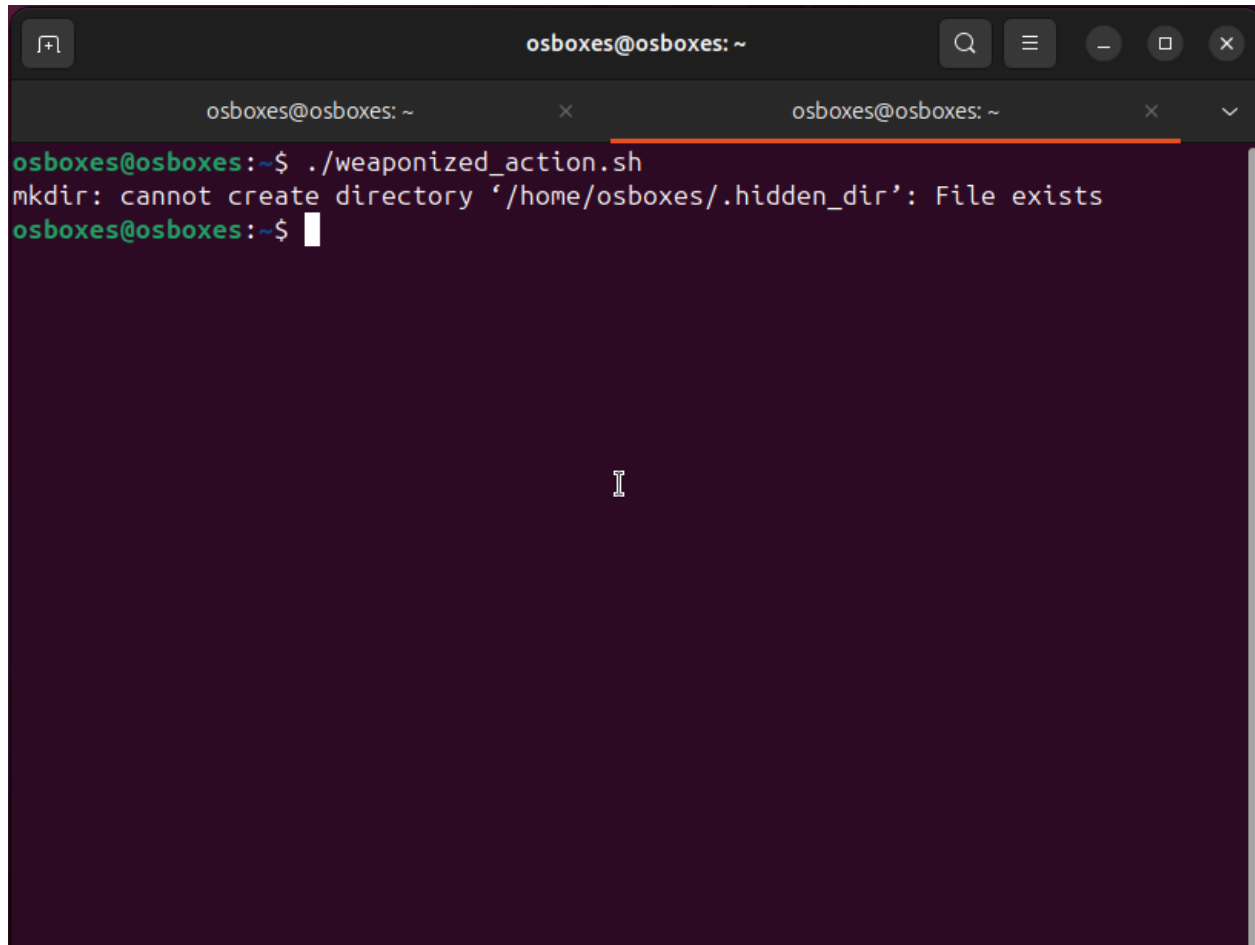

A terminal window titled "osboxes@osboxes: ~" with standard window controls. The terminal shows the execution of a script that fails to create a directory because it already exists.

```
osboxes@osboxes:~$ ./weaponized_action.sh
mkdir: cannot create directory '/home/osboxes/.hidden_dir': File exists
osboxes@osboxes:~$
```

osboxes@osboxes: ~

osboxes@osboxes: ~

GNU nano 8.3

inotify.log

/etc/passwd OPEN

/etc/passwd ACCESS

/etc/passwd CLOSE_NOWRITE,CLOSE

[Read 3 lines]

^G Help

^X Exit

^O Write Out

^R Read File

^F Where Is

^_ Replace

^K Cut

^U Paste


^T Execute

^J Justify


^C Location

^/ Go To Line

Test 4

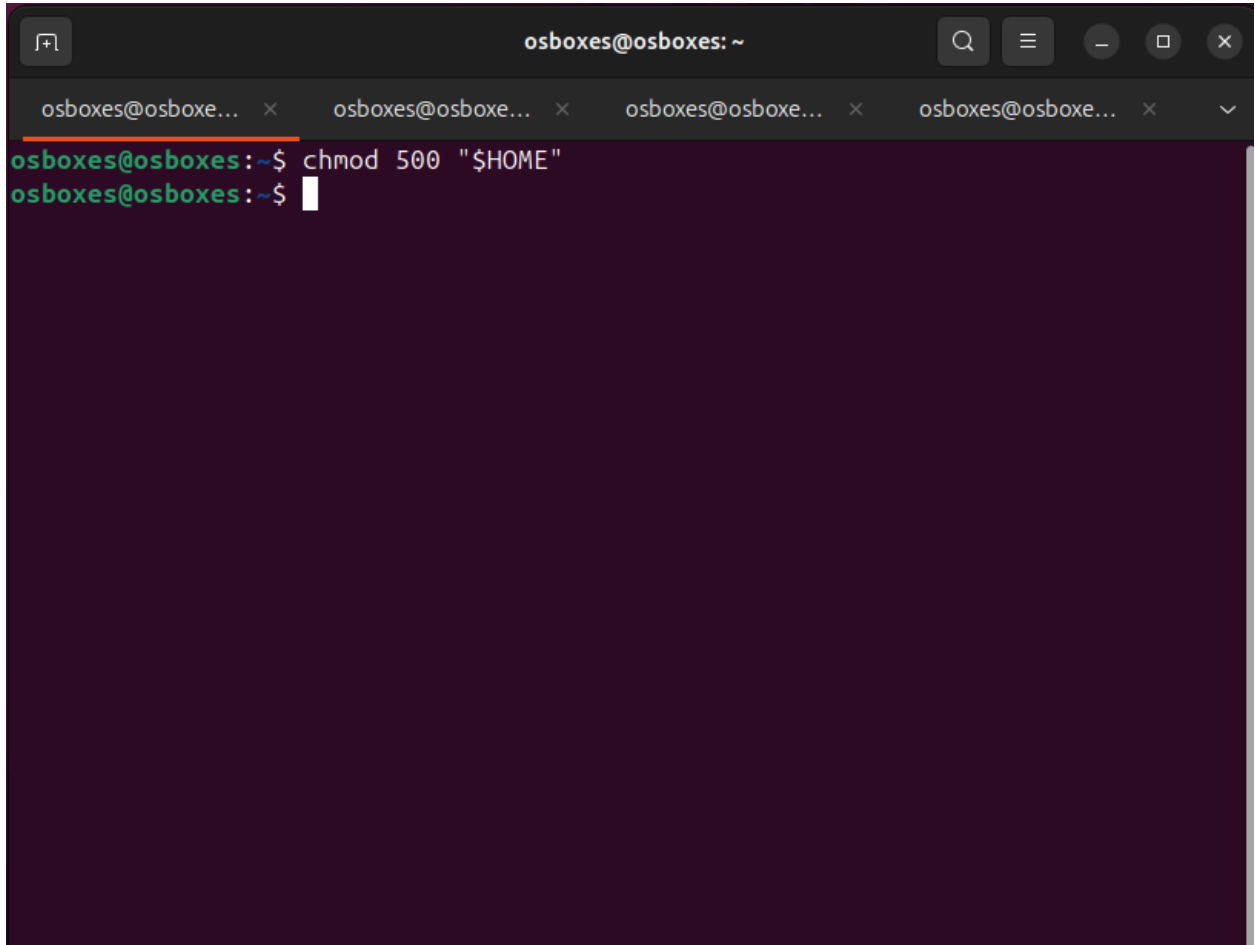
A terminal window with a dark purple background. The title bar at the top reads "osboxes@osboxes: ~" and includes standard window controls (search, menu, zoom, close). Below the title bar, there are four tabs, each labeled "osboxes@osboxe..." with a close button. The terminal content shows two lines of text: "osboxes@osboxes:~\$ chmod 500 \"\$HOME\"" and "osboxes@osboxes:~\$ " followed by a white cursor. The first line is highlighted with a red underline.

```
osboxes@osboxes:~$ chmod 500 "$HOME"
osboxes@osboxes:~$
```

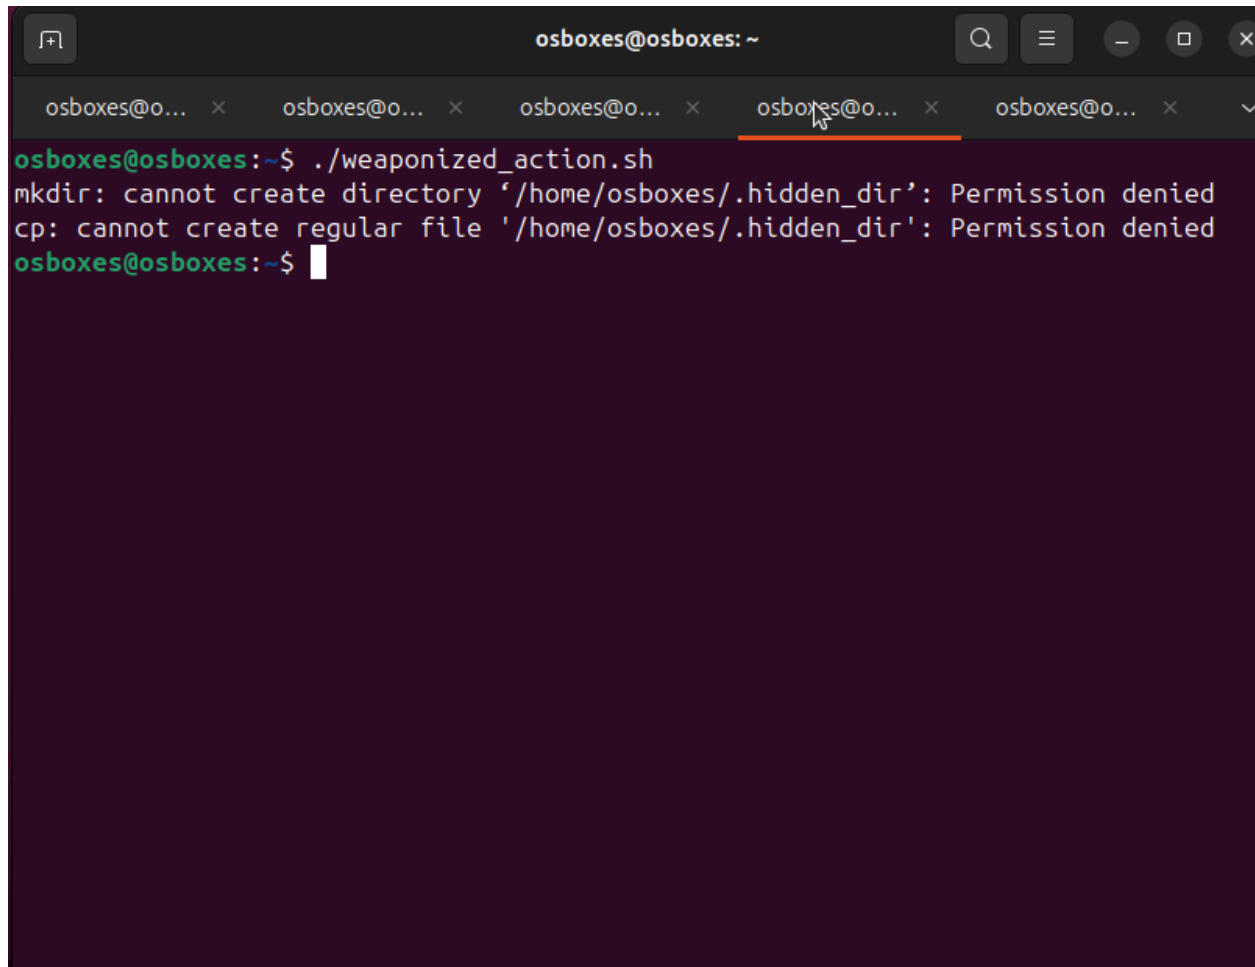

A terminal window titled "osboxes@osboxes: ~" with a search icon, menu icon, and window controls. The terminal shows the execution of a script `./weaponized_action.sh`. The output consists of two error messages: `mkdir: cannot create directory '/home/osboxes/.hidden_dir': Permission denied` and `cp: cannot create regular file '/home/osboxes/.hidden_dir': Permission denied`. The prompt `osboxes@osboxes:~$` is followed by a cursor.

```
osboxes@osboxes:~$ ./weaponized_action.sh
mkdir: cannot create directory '/home/osboxes/.hidden_dir': Permission denied
cp: cannot create regular file '/home/osboxes/.hidden_dir': Permission denied
osboxes@osboxes:~$
```

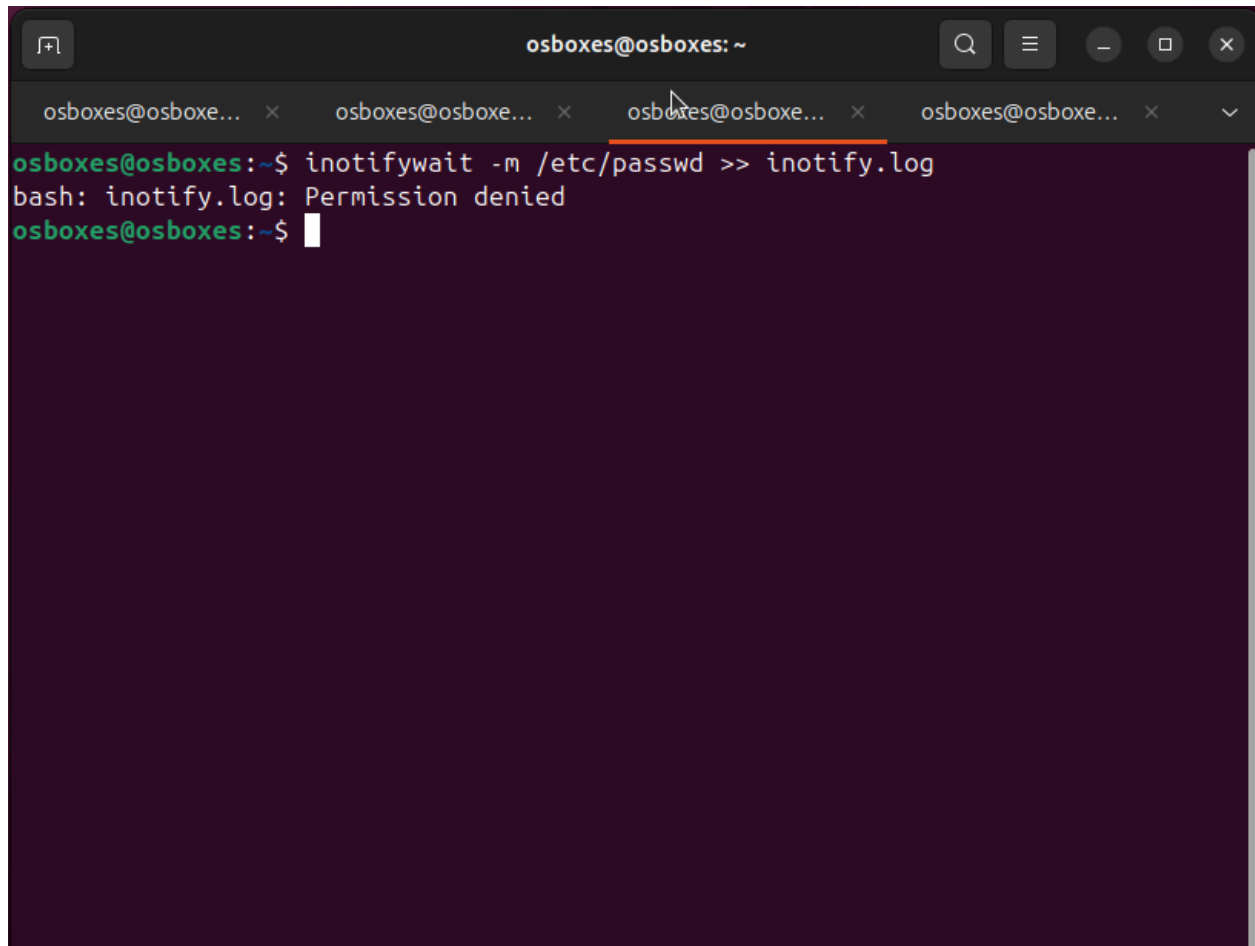

A terminal window titled "osboxes@osboxes: ~" with four tabs. The active tab shows a command being executed: `inotifywait -m /etc/passwd >> inotify.log`. The output is `bash: inotify.log: Permission denied`. The prompt is `osboxes@osboxes:~$`.

```
osboxes@osboxes:~$ inotifywait -m /etc/passwd >> inotify.log
bash: inotify.log: Permission denied
osboxes@osboxes:~$
```

```
osboxes@osboxes: ~  
osboxes@o... x osboxes@o... x osboxes@o... x osboxes@o... x osboxes@o... x  
osboxes@osboxes:~$ inotifywait -m /etc/passwd  
Setting up watches.  
Watches established.  
/etc/passwd OPEN  
/etc/passwd CLOSE_NOWRITE,CLOSE  
I  
|
```

Test 5

```
osboxes@o... x  osboxes@o... x  osboxes@o... x  osboxes@o... x  osboxes@o... x
osboxes@osboxes:~$ env -u HOME ./weaponized_action.sh
mkdir: cannot create directory '~/hidden_dir': No such file or directory
cp: cannot create regular file '~/hidden_dir': No such file or directory
osboxes@osboxes:~$
```

```
osboxes@o... x osboxes@o... x osboxes@o... x osboxes@o... x osboxes@o... x
GNU nano 8.3 inotify.log
/etc/passwd OPEN
/etc/passwd CLOSE_NOWRITE,CLOSE

[ Read 2 lines ]
^G Help      ^O Write Out ^F Where Is  ^K Cut       ^T Execute   ^C Locatio
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify   ^/ Go To L
```