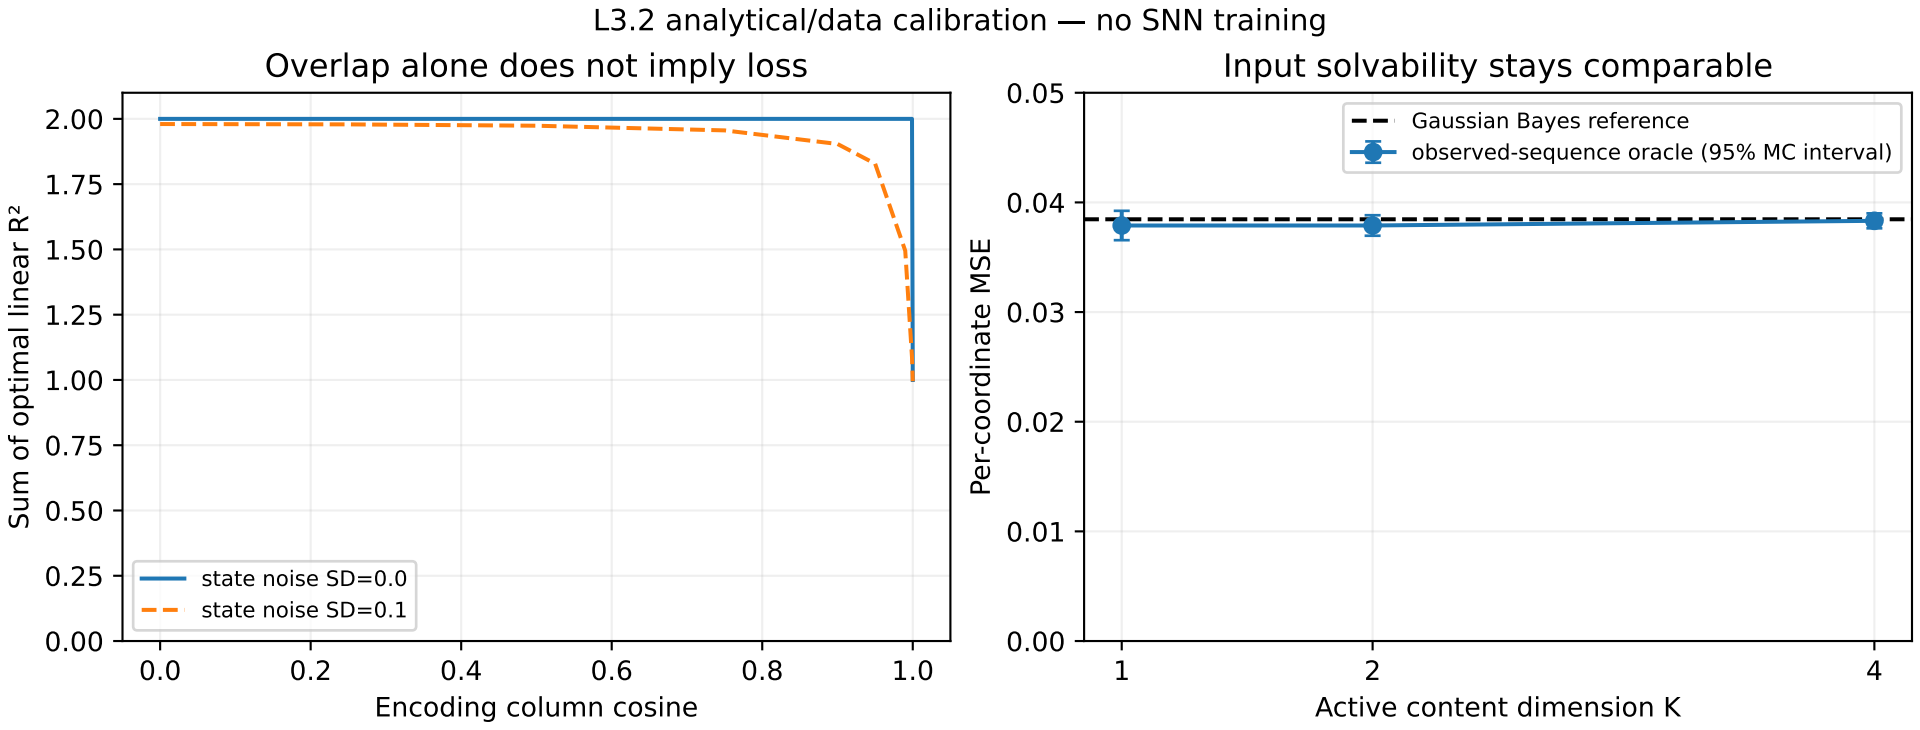
L3.2 analytical/data calibration — no SNN training
Overlap alone does not imply loss
Sum of optimal linear R²
Encoding column cosine
state noise SD=0.0
state noise SD=0.1
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
0.0
0.2
0.4
0.6
0.8
1.0
Input solvability stays comparable
Per-coordinate MSE
Active content dimension K
Gaussian Bayes reference
observed-sequence oracle (95% MC interval)
0.00
0.01
0.02
0.03
0.04
0.05
1
2
4