

Validation Flowering data

Loïc Pages

2025-12-03

Initialisation

```
rm(list=ls())  
library(spaMM)
```

```
## Registered S3 methods overwritten by 'registry':  
##   method                from  
##   print.registry_field proxy  
##   print.registry_entry proxy
```

```
## spaMM (Rousset & Ferdy, 2014, version 4.6.42.1) is loaded. See spaMM  
## ('?spaMM::spaMM') for a short introduction, 'news(package='spaMM')' for news,  
## and 'citation('spaMM')' for proper citation. Further infos, slides, etc. at  
## https://gitlab.mbb.univ-montp2.fr/francois/spamm-ref.
```

```
library(tidyverse)
```

```
## -- Attaching core tidyverse packages ----- tidyverse 2.0.0 --  
## v dplyr      1.1.4      v readr      2.1.5  
## v forcats    1.0.0      v stringr   1.5.1  
## v ggplot2    3.5.1      v tibble    3.2.1  
## v lubridate  1.9.4      v tidyr     1.3.1  
## v purrr      1.0.2  
## -- Conflicts ----- tidyverse_conflicts() --  
## x dplyr::filter() masks stats::filter()  
## x dplyr::lag()    masks stats::lag()  
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```
library(popbio)
```

```
setwd("/media/loic/Commun/OTravail/2025 IPM Centauree ISEM/2025 Stage ISEM/Code/IPM")
```

```
#Data
```

```
IPM_data <- read.csv("newdata.csv")
```

```
MatrixDim <- 50
```

```
RecrRate <- 0.338 #recruitment rate
```

```

#Force maximal age to 8
AgeMax <- 8
IPM_data$Age[IPM_data$Age > AgeMax] <- AgeMax

centauree_data <- IPM_data[!is.na(IPM_data$Size0Mars) & !is.na(IPM_data$Age),]

spaMM.options(separation_max=70)

```

Kernal matrices IPM

```

load("IPMKernalPopYear_AIC")
load("IPMKernalPop_AIC")
load("IPMKernal_AIC")

```

Vital rate functions

```

load("ModelsAIC")

```

```

annees <- 1995:2022
populations <- c("E2", "E1", "Au", "Po", "Pe", "Cr")

#Flowering Probability
#Flowering function for The survival-growth kernel
flr0 <- function(x, a, Beta=0, Pop, year) {
  fake_data <- expand.grid(
    year = year,
    Pop = Pop,
    Size0Mars = unique(x),
    Age = a)
  predi <- plogis(predict(Flowglm1, newdata = fake_data, allow.new.levels = T, type = "link") + Beta)
  meanpredi <- aggregate(predi, list(fake_data$Size0Mars), mean)
  return(meanpredi$V1)
}

```

```

minsize <- 0.5
maxsize <- 25
maxsize1 <- 15
n.size <- MatrixDim
h <- (maxsize - minsize) / n.size
h1 <- (maxsize1 - minsize) / n.size
b = minsize + c(0:n.size) * h

#sizes for an individual of age a
#midpoint
ymid.a = 0.5 * (b[1:n.size] + b[2:(n.size + 1)])
#intervals
yI.a <- matrix(nrow = n.size, ncol = 2)
for (i in 1:n.size){
  yI.a[i,1] <- b[i]
  yI.a[i,2] <- b[i+1]
}

```

```

b1 = minsize + c(0:n.size) * h1
#sizes for an individual of age 1
#midpoint
ymid.1 = 0.5 * (b1[1:n.size] + b1[2:(n.size + 1)])
#intervals
yI.1 <- matrix(nrow = n.size, ncol = 2)
for (i in 1:n.size){
  yI.1[i,1] <- b1[i]
  yI.1[i,2] <- b1[i+1]
}

```

Simulation distribution du passé

```

MatrixIPM <- IPMKernalPopYear_AIC
ME2 <- list()
ME1 <- list()
MAu <- list()
MPo <- list()
MPe <- list()
MCr <- list()

for (i in 1:28){
  ME2[[i]] <- MatrixIPM[[i]]
  ME1[[i]] <- MatrixIPM[[i+28]]
  MAu[[i]] <- MatrixIPM[[i+28*2]]
  MPo[[i]] <- MatrixIPM[[i+28*3]]
  MPe[[i]] <- MatrixIPM[[i+28*4]]
  MCr[[i]] <- MatrixIPM[[i+28*5]]
}

```

Simulations de la taille d'une population et sa distribution en stades chaque année

```

#p: 1>Enferet2, 2>Enferet1, 3>Auzils, 4>Portes, 5>Peyrals, 6>Cruzades
simudensity <- function(p, nbroyears = 50){
  N <- NULL
  Nia <- array(data = 0, dim = c(nbroyears, 8, MatrixDim))

  Pop <- populations[p]
  if (Pop=="E2") {Mat <- ME2}
  if (Pop=="E1") {Mat <- ME1}
  if (Pop=="Au") {Mat <- MAu}
  if (Pop=="Po") {Mat <- MPo}
  if (Pop=="Pe") {Mat <- MPe}
  if (Pop=="Cr") {Mat <- MCr}

  # Première année
  yr <- sample(1:length(annees),1)
  year <- anneer[yr]
  # Définition de la matrice et du vecteur propre
  M <- Mat[[yr]]
  A <- eigen.analysis(M)
}

```

```

W <- function(age) {
  return(A$stable.stage[(50 * (age - 1) + 1):(50 * age)])
}

# Nombre d'individus initial dans la population Pop
N[1] <- 1000
# Nombre d'individus dans chaque classe de taille et d'age
for (a in 1:8) {
  for (i in 1:MatrixDim) {
    Nia[1, a, ] <- N[1] * W(a)
  }
}

# Itération sur les années suivantes
for (i in 2:nbrofyears) {
  yr <- sample(1:length(annees),1)
  year <- anne[yr]
  # Définition de la matrice et du vecteur propre
  M <- Mat[[yr]]
  A <- eigen.analysis(M)
  W <- function(age) {
    return(A$stable.stage[(50 * (age - 1) + 1):(50 * age)])
  }
  Fec <- function(a) {
    #a age de plante mère
    return(M[1:50, ((a - 1) * 50 + 1):(a * 50)])
  }
  P <- function(a) {
    #a age de plante à t
    if (a == 8) {
      return(M[((50*(a-1))+1):(50*a), (50*(a-1)+1):(50*a)])
    }
    return(M[((50*a)+1):(50*(a+1)), (50*(a-1)+1):(50*a)])
  }

  # Calcul du nombre d'individus dans chaque classe de taille et d'age en utilisant le kernel
  for (a in 1:8) { # Nouvelles plantules produites
    Nia[i, 1, ] <- Nia[i, 1, ] + Fec(a) %*% Nia[i - 1, a, ]
  }
  for (a in 2:8) { # Croissance-survie des plantes
    Nia[i, a, ] <- P(a) %*% Nia[i - 1, a - 1, ]
  }
  Nia[i, 8, ] <- Nia[i, 8, ] + P(8) %*% Nia[i - 1, 8, ]

  N[i] <- sum(Nia[i,,])
}
return(Nia/N)
}

```

```

nbrofyears <- 5

```

```

densimu <- simudensity(1,nbrofyears)

```

```

AA <- expand.grid(

```


```

    Size = ymid.a,
    year = 1:nbrofyears,
    age = 1:8,
    density = NA
  )
AA$Size1 <- ymid.1
AA <- AA %>% mutate(Size = ifelse(age==1,Size1,Size)) %>%
  select(!Size1)

for (a in 1:8){
  for(yr in 1:nbrofyears){
    AA[AA$age==a & AA$year==yr,]$density <- densimu[yr,a,]
  }
}

# AA[AA$year==yr,] %>%
# AA[AA$age==4,] %>%
AA %>%
  ggplot()+
  geom_line(aes(x=Size,y=density),col="red")+
  theme_bw()+
  facet_wrap(vars(year,age) ,scale="free")+
  labs(x="Size",
       y="Density")

```

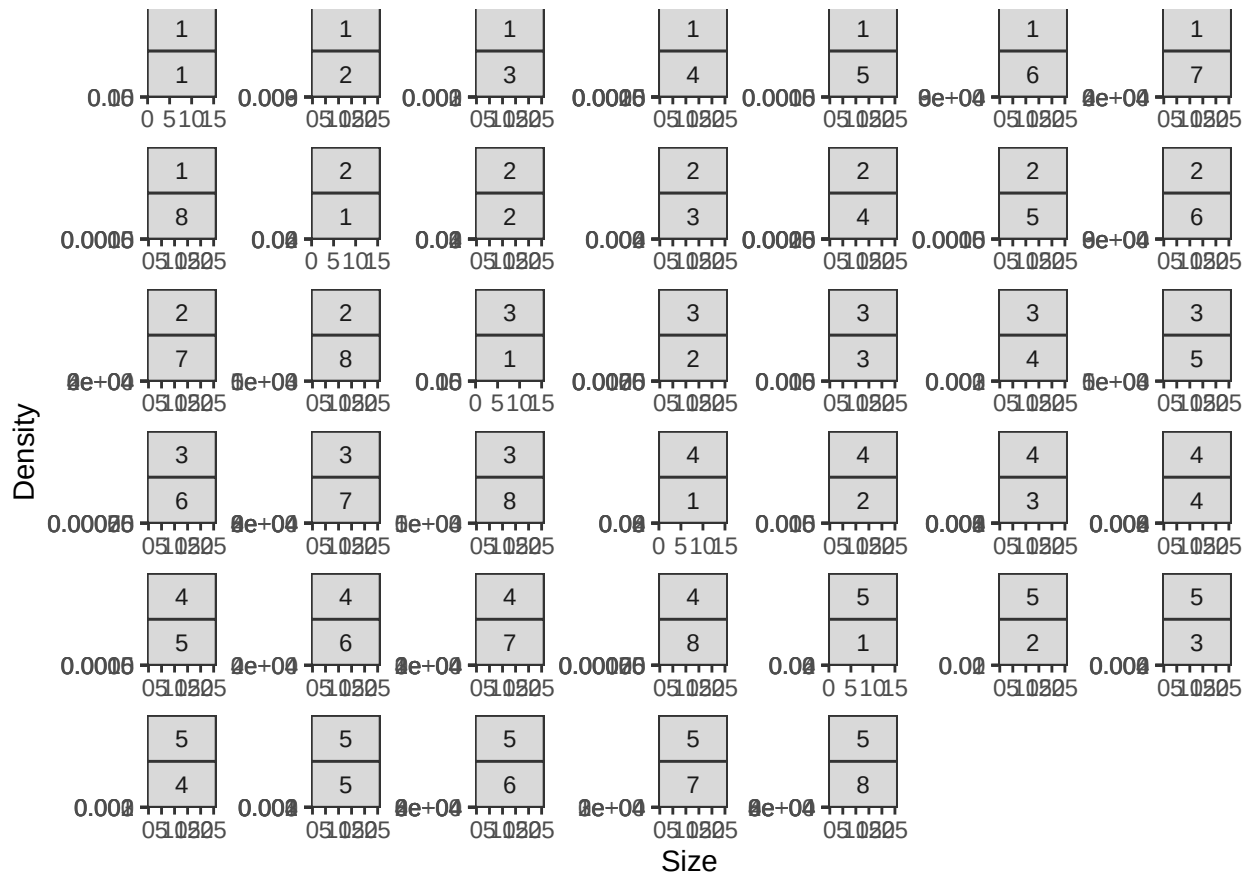

Validation du modèle en utilisant les données d'observation de plantes en fleur

Number of observed flowering plants since 1995.

```
Nf_tot <- c(494,420,604,638,343,490,631,482,815,435,613,794,210,NA,322,216,277,386,565,254,369,407,148,

Nf <- read.csv("flower_data.csv")
Nf <- type_convert(Nf,cols(
  Auzils = col_double(),
  Cruzades = col_double(),
  Enferrets.1 = col_double(),
  Enferrets.2 = col_double(),
  Peyrals = col_double(),
  Portes = col_double()
))
names(Nf) <- c("year","E2","E1","Au","Po","Pe","Cr")
Nf <- Nf %>% filter(year!=1994,year!=2025,year!=2024,year!=2023)
```

With IPM

By Pop-year

We predict the number of flowering plants by population and year starting by the observed number of flowering plant the first year.

```
#Matrices de computation
MatrixIPM <- IPMKernalPopYear_AIC

N <- matrix(nrow = length(populations),ncol=length(annees))
Nia <- array(data = 0, dim = c(length(populations), length(annees), 8, MatrixDim))
Nf_est <- matrix(nrow = length(populations),ncol=length(annees))

# p <- 1
for (p in 1:length(populations)) {
  # Initialisation
  year <- annees[1]
  Pop <- populations[p]

  # Définition de la matrice initiale et du vecteur propre
  # M <- IPMKernal_AIC # si on prend la matrice moyenne sur toutes les populations
  M <- IPMKernalPop_AIC[[p]] # si on prend la matrice moyenne de chaque population

  A <- eigen.analysis(M)
  W <- function(age) { # Vecteur propre
    return(A$stable.stage[(50 * (age - 1) + 1):(50 * age)])
  }
  print(p)
  ### si on utilise la distribution après nbrofyears d'années aléatoires concaténées.
  # nbrofyears <- 10
  # densimu <- simudensity(p,nbrofyears = nbrofyears)
  # W <- function(age){
```

```

#   return(densimu[nbrofyears,age,])}

# Densité estimée d'individus fleuris
Nf_dens <- sum(W(1) * flr0(ymid.1, 1, Pop=Pop, year=year))
for (a in 2:8) {
  Nf_dens <- Nf_dens + sum(W(a) * flr0(ymid.a, a, Pop=Pop, year=year))
}

# Nombre d'individus total dans la population Pop la première année, utilisant les données observées
N[p, 1] <- Nf[1, p + 1] / Nf_dens
# Nombre d'individus dans chaque classe de taille et d'age
for (a in 1:8) {
  for (i in 1:MatrixDim) {
    Nia[p, 1, a, i] <- N[p, 1] * W(a)
  }
}

Nf_est[p, 1] <- Nf[1,p+1]

# Itération sur les années suivantes
for (yr in 2:length(annees)) {
  print(yr)
  year <- annees[yr]
  # Définition de la matrice et du vecteur propre
  Pop <- populations[p]
  M <- MatrixIPM[[(p - 1) * length(annees) + yr]]
  A <- eigen.analysis(M)
  W <- function(age) {
    return(A$stable.stage[(50 * (age - 1) + 1):(50 * age)])
  }
  Fec <- function(a) {
    #a age de plante mère
    return(M[1:50, ((a - 1) * 50 + 1):(a * 50)])
  }
  P <- function(a) {
    #a age de plante à t
    if (a == 8) {
      return(M[((50*(a-1))+1):(50*a), (50*(a-1)+1):(50*a)])
    }
    return(M[((50*a)+1):(50*(a+1)), (50*(a-1)+1):(50*a)])
  }

  # Calcul du nombre d'individus dans chaque classe de taille et d'age en utilisant le kernel
  for (a in 1:8) { # Nouvelles plantules produites
    Nia[p, yr, 1, ] <- Nia[p, yr, 1, ] + Fec(a) %*% Nia[p, yr - 1, a, ]
  }
  for (a in 2:8) { # Croissance-survie des plantes
    Nia[p, yr, a, ] <- P(a) %*% Nia[p, yr - 1, a - 1, ]
  }
  Nia[p, yr, 8, ] <- Nia[p, yr, 8, ] + P(8) %*% Nia[p, yr - 1, 8, ]

  #Calcul du nombre de plantes en fleurs
  Nf_est[p, yr] <- sum(Nia[p, yr, 1, ] * flr0(ymid.1, 1, Pop=Pop, year=year))
  for (a in 2:8) {
    Nf_est[p, yr] <- Nf_est[p, yr] + sum(Nia[p, yr, a, ] * flr0(ymid.a, a, Pop=Pop, year=year))
  }
}

```

```
}  
}  
}
```

```
## [1] 1  
## [1] 2  
## [1] 3  
## [1] 4  
## [1] 5  
## [1] 6  
## [1] 7  
## [1] 8  
## [1] 9  
## [1] 10  
## [1] 11  
## [1] 12  
## [1] 13  
## [1] 14  
## [1] 15  
## [1] 16  
## [1] 17  
## [1] 18  
## [1] 19  
## [1] 20  
## [1] 21  
## [1] 22  
## [1] 23  
## [1] 24  
## [1] 25  
## [1] 26  
## [1] 27  
## [1] 28  
## [1] 2  
## [1] 2  
## [1] 3  
## [1] 4  
## [1] 5  
## [1] 6  
## [1] 7  
## [1] 8  
## [1] 9  
## [1] 10  
## [1] 11  
## [1] 12  
## [1] 13  
## [1] 14  
## [1] 15  
## [1] 16  
## [1] 17  
## [1] 18  
## [1] 19  
## [1] 20  
## [1] 21
```

```
## [1] 22
## [1] 23
## [1] 24
## [1] 25
## [1] 26
## [1] 27
## [1] 28
## [1] 3
## [1] 2
## [1] 3
## [1] 4
## [1] 5
## [1] 6
## [1] 7
## [1] 8
## [1] 9
## [1] 10
## [1] 11
## [1] 12
## [1] 13
## [1] 14
## [1] 15
## [1] 16
## [1] 17
## [1] 18
## [1] 19
## [1] 20
## [1] 21
## [1] 22
## [1] 23
## [1] 24
## [1] 25
## [1] 26
## [1] 27
## [1] 28
## [1] 4
## [1] 2
## [1] 3
## [1] 4
## [1] 5
## [1] 6
## [1] 7
## [1] 8
## [1] 9
## [1] 10
## [1] 11
## [1] 12
## [1] 13
## [1] 14
## [1] 15
## [1] 16
## [1] 17
## [1] 18
## [1] 19
```


```
## [1] 20
## [1] 21
## [1] 22
## [1] 23
## [1] 24
## [1] 25
## [1] 26
## [1] 27
## [1] 28
## [1] 5
## [1] 2
## [1] 3
## [1] 4
## [1] 5
## [1] 6
## [1] 7
## [1] 8
## [1] 9
## [1] 10
## [1] 11
## [1] 12
## [1] 13
## [1] 14
## [1] 15
## [1] 16
## [1] 17
## [1] 18
## [1] 19
## [1] 20
## [1] 21
## [1] 22
## [1] 23
## [1] 24
## [1] 25
## [1] 26
## [1] 27
## [1] 28
## [1] 6
## [1] 2
## [1] 3
## [1] 4
## [1] 5
## [1] 6
## [1] 7
## [1] 8
## [1] 9
## [1] 10
## [1] 11
## [1] 12
## [1] 13
## [1] 14
## [1] 15
## [1] 16
## [1] 17
```

```
## [1] 18
## [1] 19
## [1] 20
## [1] 21
## [1] 22
## [1] 23
## [1] 24
## [1] 25
## [1] 26
## [1] 27
## [1] 28
```

```
#Nf_est <- round(Nf_est)
```


Estimated number of flowering plants by years and population.

```
plot(y=Nf_est[1,], x=annees, type="l", ylim=c(0,max(c(Nf_est[1,],Nf$E2),na.rm=TRUE)), xlab="Year", ylab="Number of flowering plants")
```

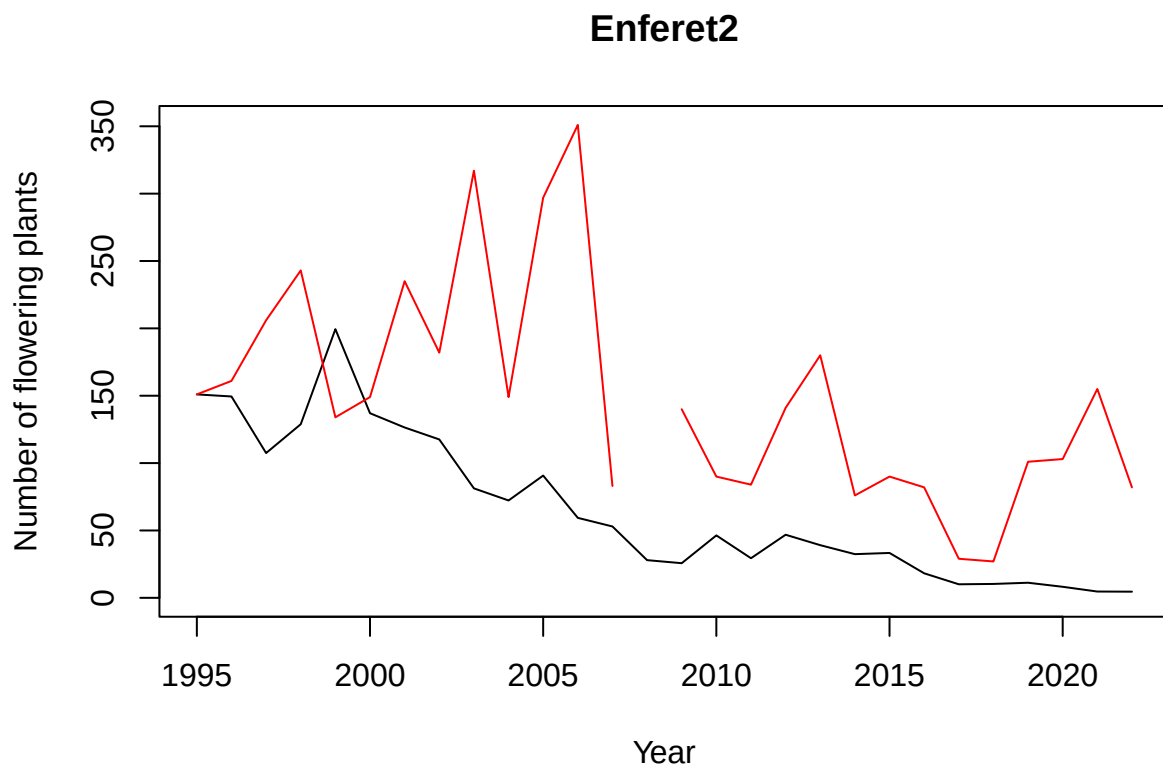


```
plot(y=Nf_est[2,], x=annees,type="l",ylim=c(0,max(c(Nf_est[2,],Nf$E1),na.rm=TRUE)), xlab="Year", ylab="Number of flowering plants")
```

Enferet1

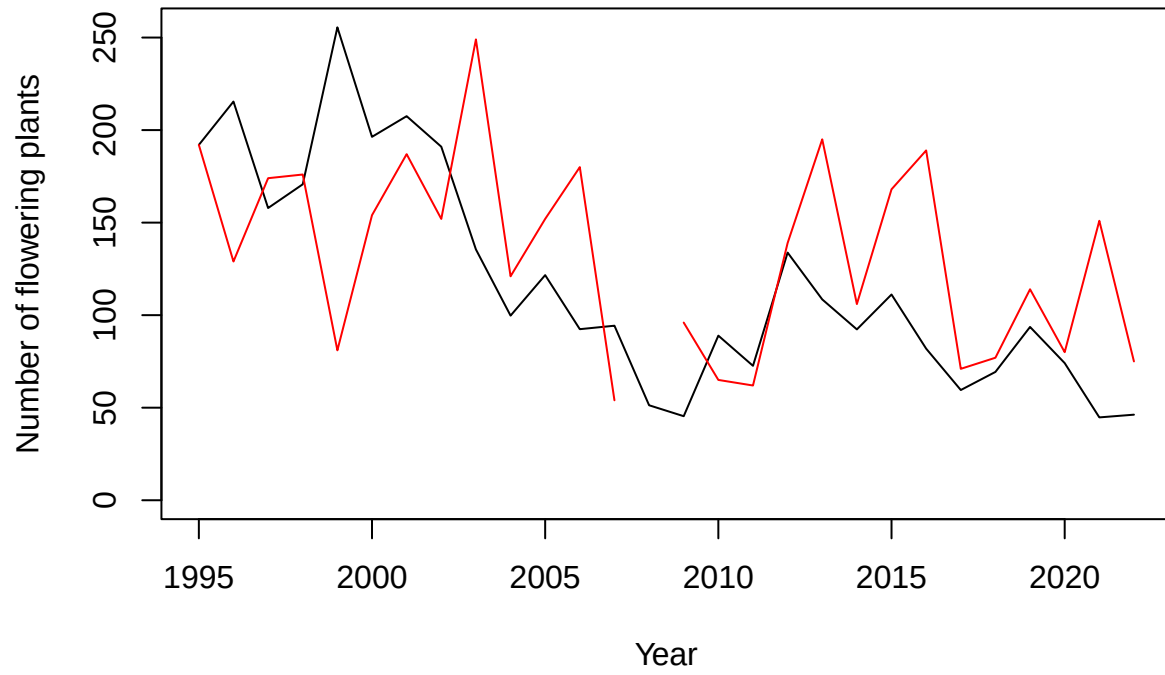


```
plot(y=Nf_est[3,], x=annees,type="l",ylim=c(0,max(c(Nf_est[3,],Nf$Au),na.rm=TRUE)), xlab="Year", ylab="Number of flowering plants")
```

Auzils

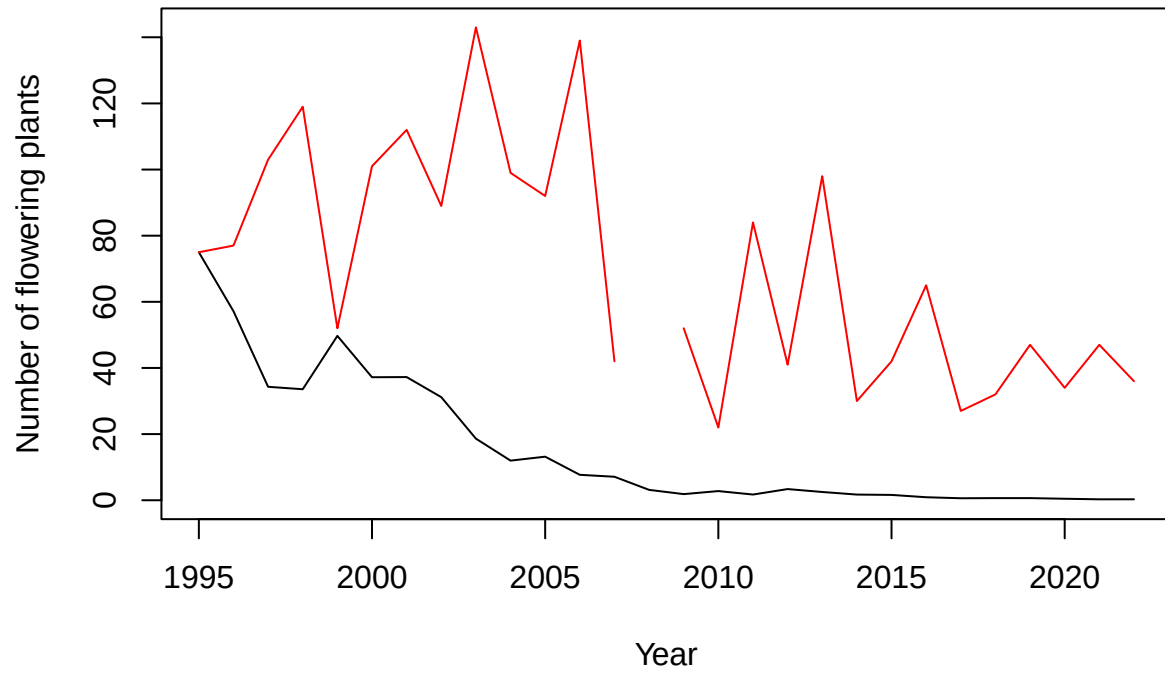


```
plot(y=Nf_est[4,], x=annees,type="l",ylim=c(0,max(c(Nf_est[4,],Nf$Po),na.rm=TRUE)), xlab="Year", ylab="Number of flowering plants")
```

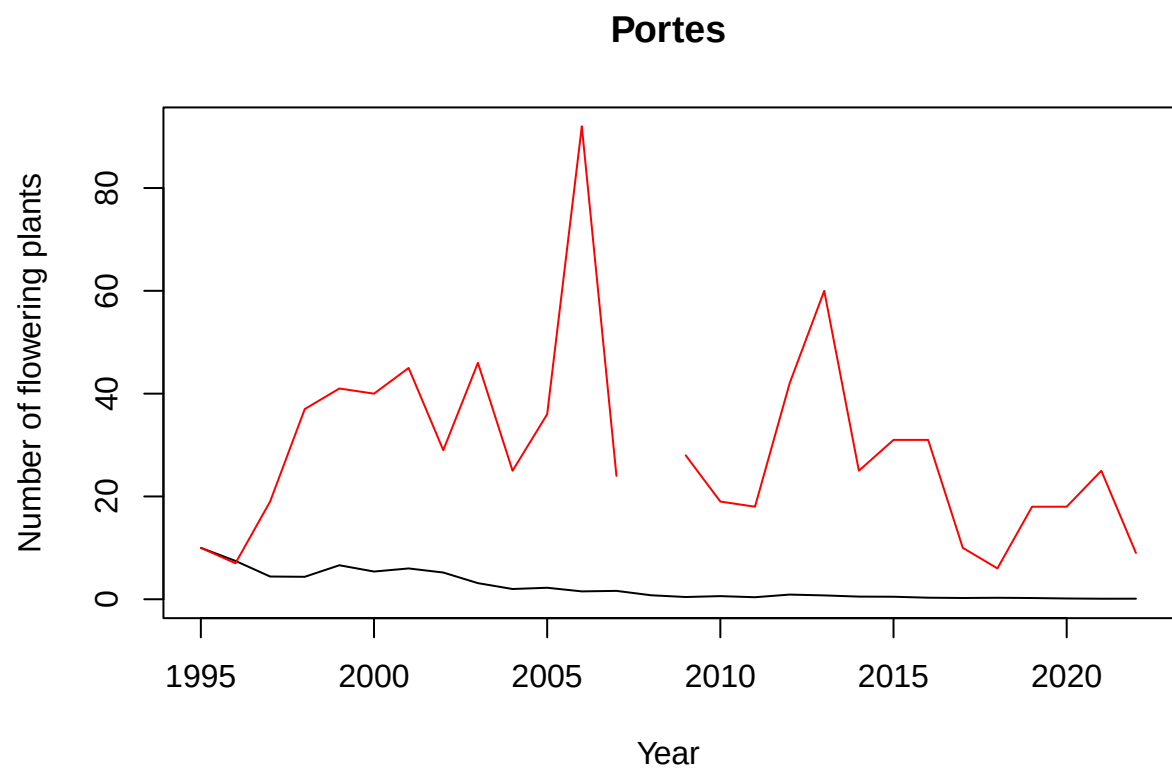


```
plot(y=Nf_est[5,], x=annees,type="l",ylim=c(0,max(c(Nf_est[5,],Nf$Pe),na.rm=TRUE)), xlab="Year", ylab="")
```

Peyral

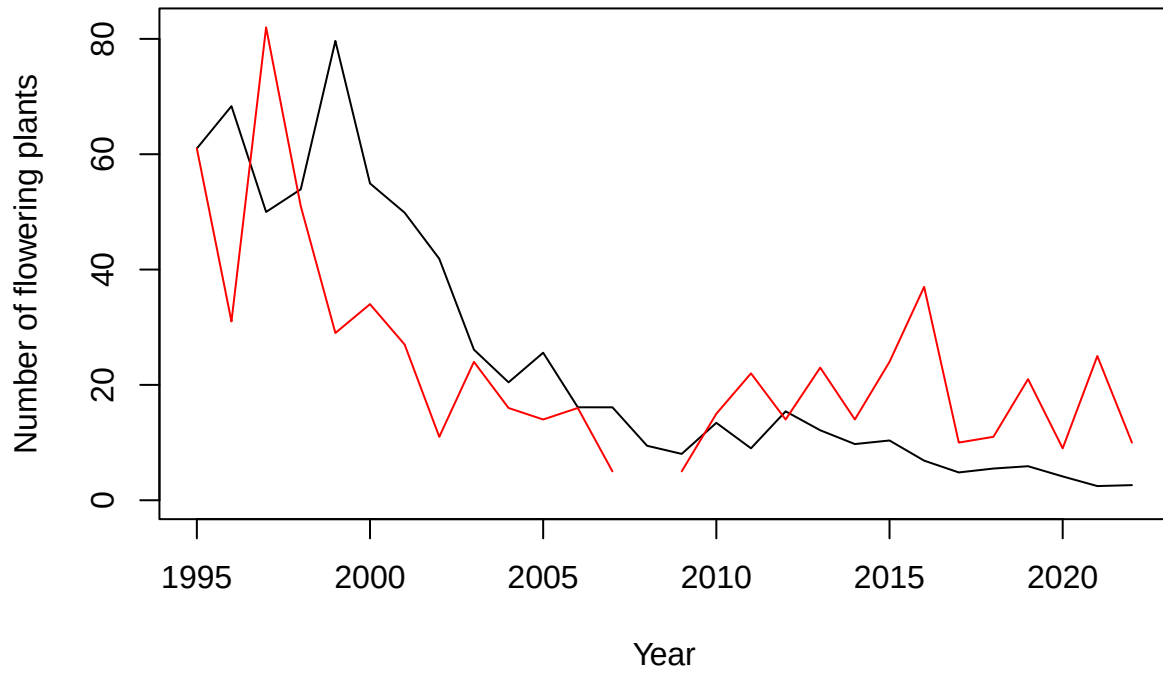

```
plot(y=Nf_est[6,], x=annees,type="l",ylim=c(0,max(c(Nf_est[6,],Nf$Cr),na.rm=TRUE)), xlab="Year", ylab="Number of flowering plants")
```

Cruzade

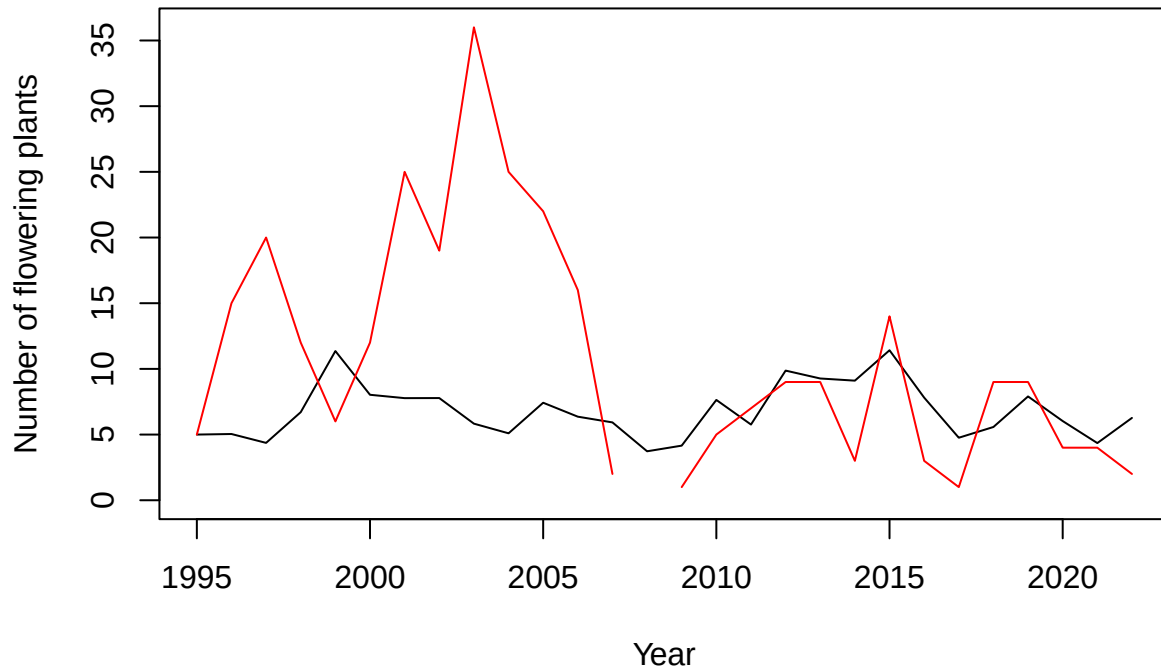

Estimated number of flowering plants by years and population compared to observed number

```
Nb_flower_IPM <- expand_grid(
  Pop = populations,
  year = annees)
Nb_flower_IPM$estimated_nb_flw <- as.vector(t(Nf_est))
Nb_flower_IPM$observed_nb_flw[Nb_flower_IPM$Pop=="E2"] <- Nf$E2
Nb_flower_IPM$observed_nb_flw[Nb_flower_IPM$Pop=="E1"] <- Nf$E1
Nb_flower_IPM$observed_nb_flw[Nb_flower_IPM$Pop=="Au"] <- Nf$Au
Nb_flower_IPM$observed_nb_flw[Nb_flower_IPM$Pop=="Po"] <- Nf$Po
Nb_flower_IPM$observed_nb_flw[Nb_flower_IPM$Pop=="Pe"] <- Nf$Pe
Nb_flower_IPM$observed_nb_flw[Nb_flower_IPM$Pop=="Cr"] <- Nf$Cr
Nb_flower_IPM <- Nb_flower_IPM %>%
  group_by(Pop) %>%
  mutate(lim = max(observed_nb_flw,estimated_nb_flw,na.rm=TRUE))
#All populations summed
sumPopIPM <- tibble(Pop = "SummedPop",
  observed_nb_flw = Nf_tot,
  estimated_nb_flw = (Nb_flower_IPM %>% group_by(year) %>% summarize(estimated_nb_flw = sum(est.
  year = annees))

Nb_flower_IPM2 <- bind_rows(Nb_flower_IPM,sumPopIPM)

r2_data <- Nb_flower_IPM2 %>%
  group_by(Pop) %>%
  summarise(
```

```

r2 = summary(lm(estimated_nb_flw ~ observed_nb_flw))$r.squared,
biais = mean(estimated_nb_flw - observed_nb_flw, na.rm = TRUE),
biais_relatif = 100 * biais / mean(observed_nb_flw, na.rm = TRUE))

r2_data <- r2_data %>%
  add_row(Pop = "AllPop",
    r2 = summary(lm(Nb_flower_IPM$estimated_nb_flw~Nb_flower_IPM$observed_nb_flw))$r.squared,
    biais = mean(Nb_flower_IPM$estimated_nb_flw-Nb_flower_IPM$observed_nb_flw, na.rm=TRUE),
    biais_relatif = 100*mean(Nb_flower_IPM$estimated_nb_flw-Nb_flower_IPM$observed_nb_flw, na.rm=


labels_r2 <- paste0(r2_data$Pop, " (R² = ", round(r2_data$r2, 2), ")")
names(labels_r2) <- r2_data$Pop

```

```

## Warning: Removed 6 rows containing missing values or values outside the scale range
## ('geom_point()').

```

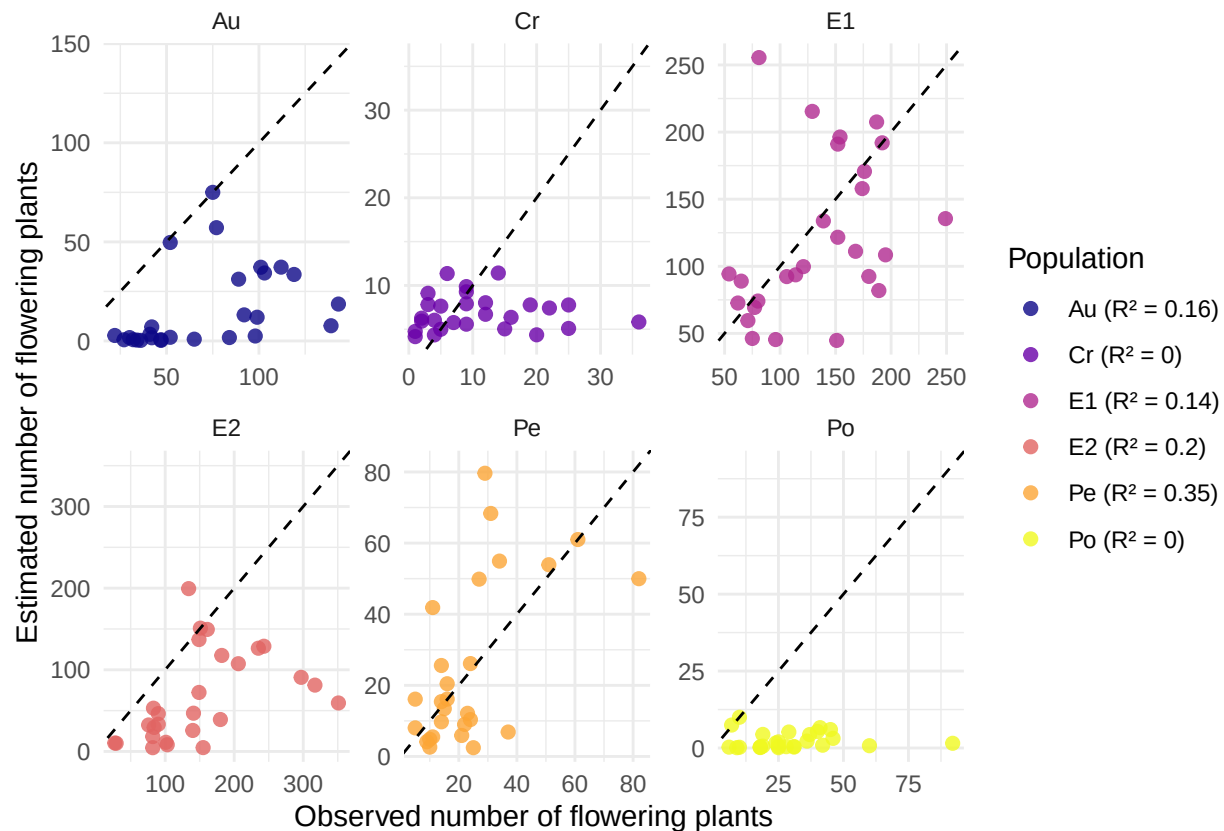


Sum over populations

We sum the number of flowering plants each year to have the total number of flowering plants


```
Nf_est_tot <- Nb_flower_IPM2[Nb_flower_IPM2$Pop=="SummedPop",]$estimated_nb_flw
```

Estimated number of flowering plants by years and population.

```
plot(y=Nf_est_tot, x=annees, type="l", xlab="Year", ylab="Number of flowering plants", ylim = c(0,max(Nf_est_tot)))
```

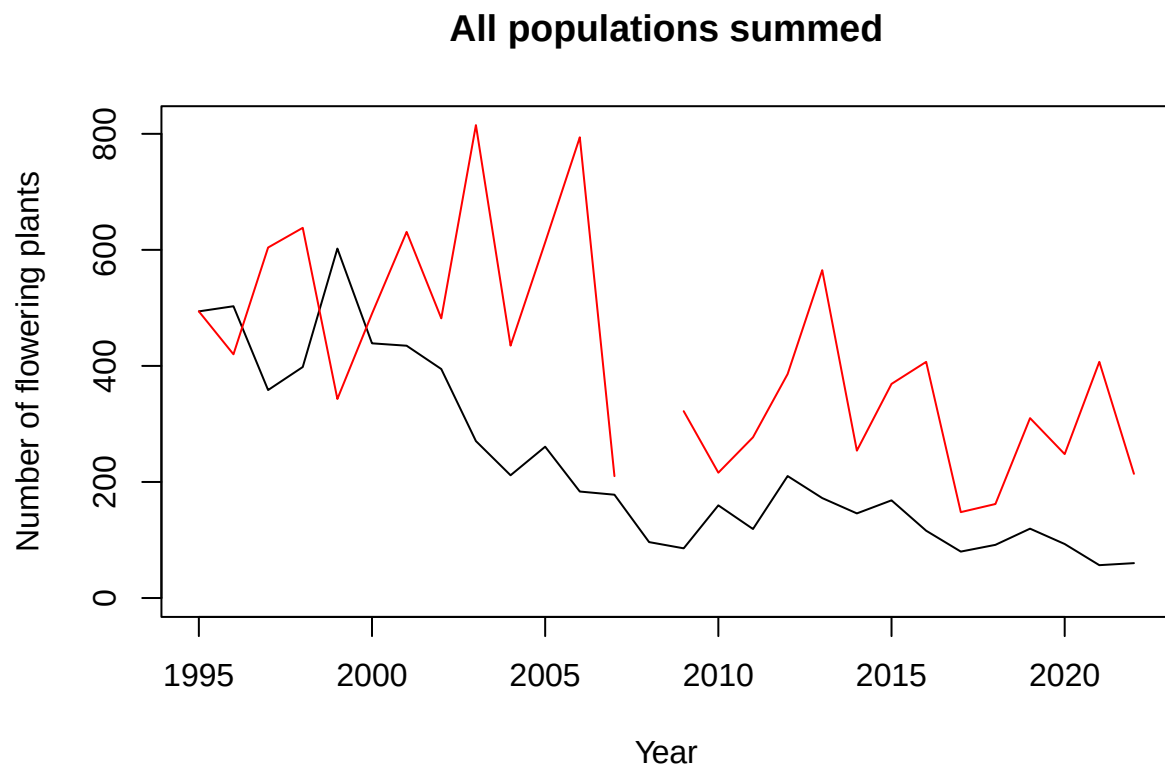

```
## Warning: Removed 1 row containing missing values or values outside the scale range  
## ('geom_point()').
```

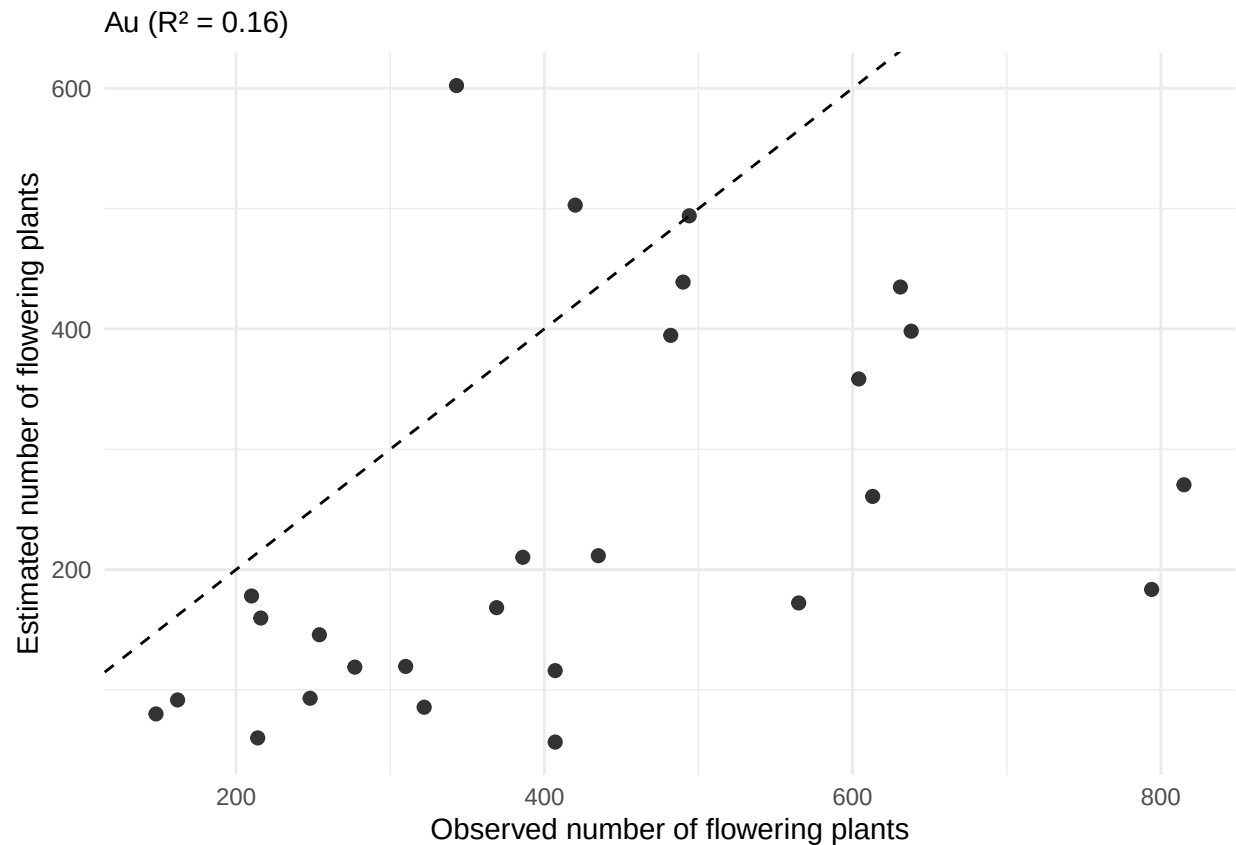

With MPM

```
anneesMPM <- annees[-c(27,28)]
```

Kernal matrices MPM

```
load("/media/loic/Commun/0Travail/2025 IPM Centauree ISEM/2025 Stage ISEM/Bibliographie/Code AsmaEric/d
matricesE2 <- matrices[-1]
load("/media/loic/Commun/0Travail/2025 IPM Centauree ISEM/2025 Stage ISEM/Bibliographie/Code AsmaEric/d
matricesE1 <- matrices[-1]
load("/media/loic/Commun/0Travail/2025 IPM Centauree ISEM/2025 Stage ISEM/Bibliographie/Code AsmaEric/d
matricesAu <- matrices[-1]
load("/media/loic/Commun/0Travail/2025 IPM Centauree ISEM/2025 Stage ISEM/Bibliographie/Code AsmaEric/d
matricesPo <- matrices[-1]
load("/media/loic/Commun/0Travail/2025 IPM Centauree ISEM/2025 Stage ISEM/Bibliographie/Code AsmaEric/d
matricesPe <- matrices[-1]
load("/media/loic/Commun/0Travail/2025 IPM Centauree ISEM/2025 Stage ISEM/Bibliographie/Code AsmaEric/d
matricesCr <- matrices[-1]
load("/media/loic/Commun/0Travail/2025 IPM Centauree ISEM/2025 Stage ISEM/Bibliographie/Script pour vér
matriceMPM <- A

rm(matrices,A)
```

```

Nf_est_M = matrix(nrow = length(populations),ncol=length(matricesAu))
N <- NA

for (p in 1:length(populations)) {
  # Définition de la matrice et du vecteur propre
  Pop <- populations[p]
  if (Pop=="E2") {matrices <- matricesE2}
  if (Pop=="E1") {matrices <- matricesE1}
  if (Pop=="Au") {matrices <- matricesAu}
  if (Pop=="Po") {matrices <- matricesPo}
  if (Pop=="Pe") {matrices <- matricesPe}
  if (Pop=="Cr") {matrices <- matricesCr}


  # Définition de la matrice initiale et du vecteur propre
  # M <- matriceMPM      # si on prend avec la matrice moyenne sur toutes les populations
  M <- mean(matrices)    # si on prend avec la matrice moyenne pour chaque population
  ev <- eigen(M)
  W <- abs(Re(ev$vectors[,1]))
  W <- W/sum(W)
  N <- round(W*Nf[1,p+1]/W[3])
  Nf_est_M[p,1] <- Nf[1,p+1]

  for (i in 2:26){
    M <- matrices[[i]]
    ev <- eigen(M)
    W <- abs(Re(ev$vectors[,1]))
    W <- W/sum(W)
    # if(is.nan(N[1]==TRUE)){N <- W*Nf_est_M[p,i-1]/W[3]}
    N <- M%*%N
    Nf_est_M[p,i] <- N[3]
  }
}

plot(y=Nf_est_M[1,], x=anneesMPM, type="l", ylim=c(0,max(c(Nf_est_M[1,],Nf$E2),na.rm=TRUE)), xlab="Year")


```

Enferet2

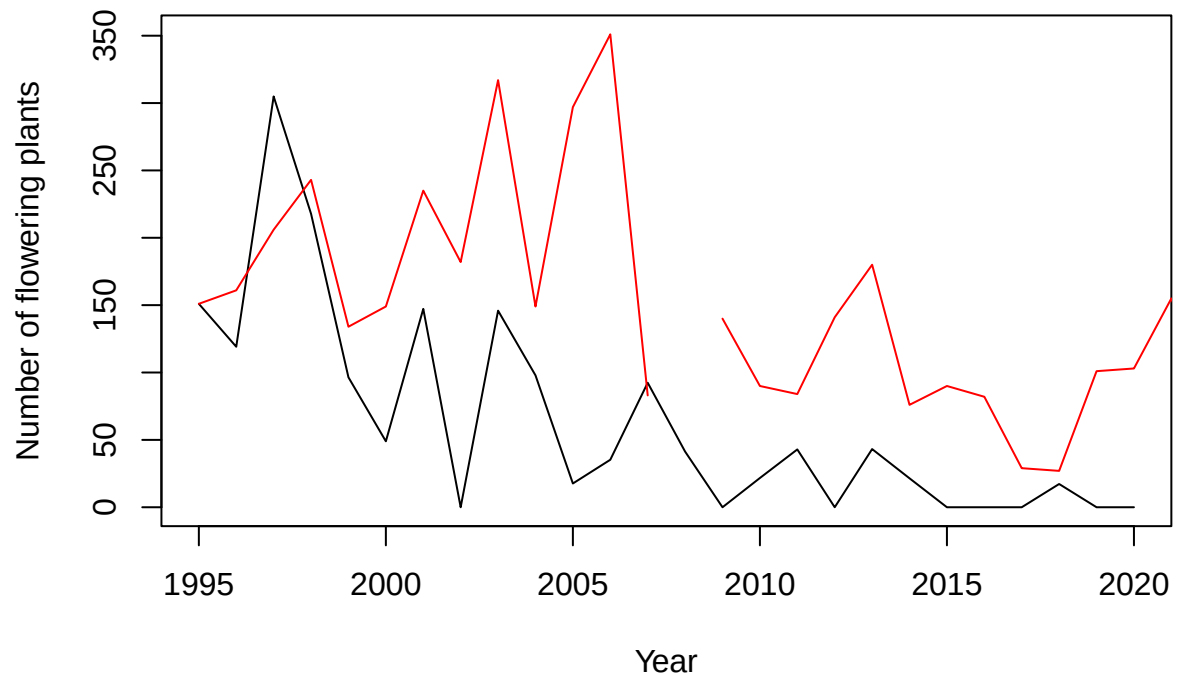


```
plot(y=Nf_est_M[2,], x=anneesMPM,type="l",ylim=c(0,max(c(Nf_est_M[2,],Nf$E1),na.rm=TRUE)), xlab="Year",
```

Enferet1

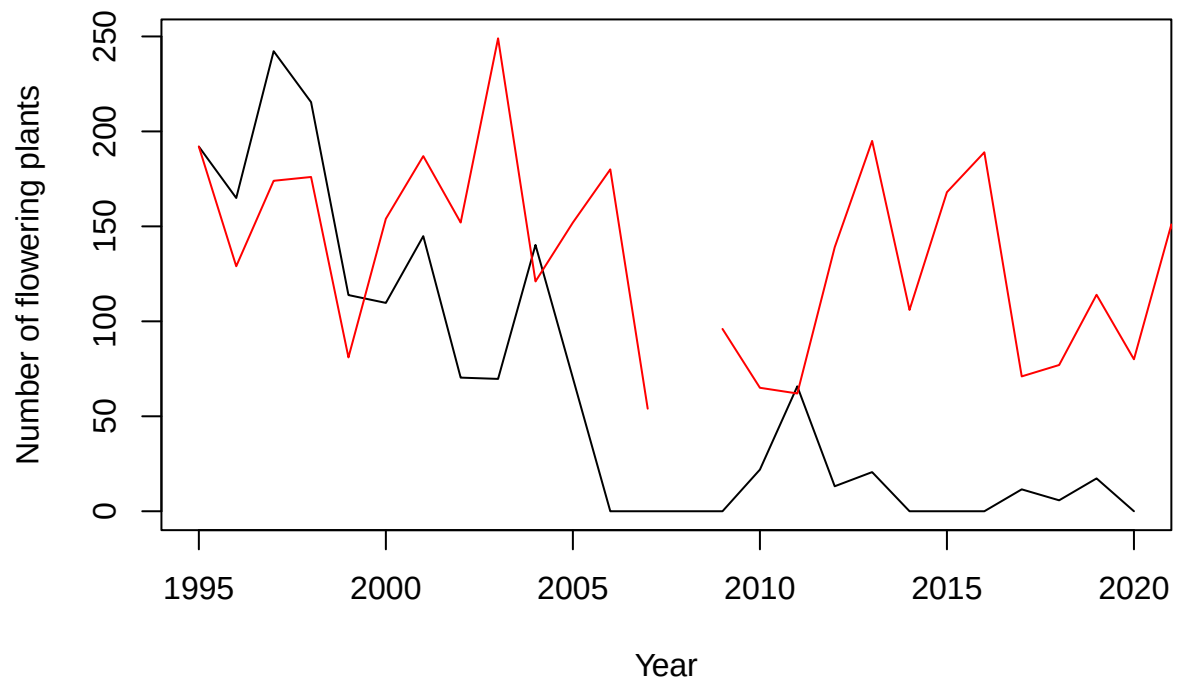


```
plot(y=Nf_est_M[3,], x=anneesMPM,type="l",ylim=c(0,max(c(Nf_est_M[3,],Nf$Au),na.rm=TRUE)), xlab="Year",
```

Auzils

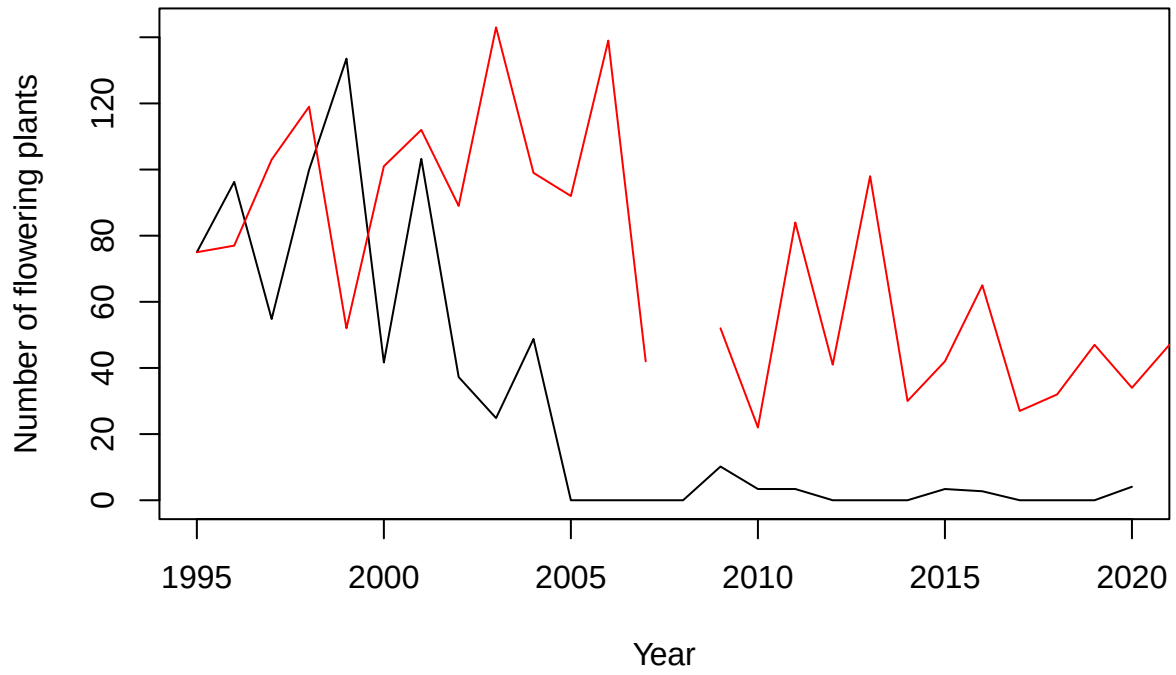


```
plot(y=Nf_est_M[4,], x=anneesMPM,type="l",ylim=c(0,max(c(Nf_est_M[4,],Nf$Po),na.rm=TRUE)), xlab="Year",
```

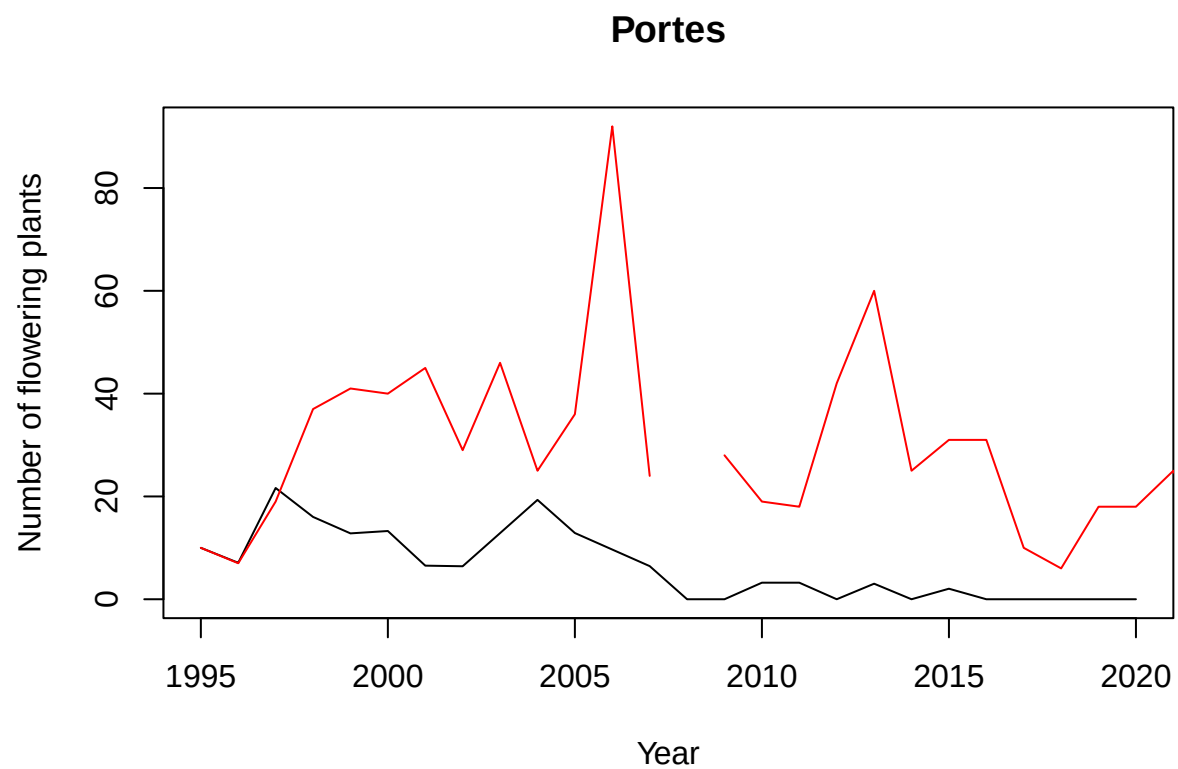


```
plot(y=Nf_est_M[5,], x=anneesMPM,type="l",ylim=c(0,max(c(Nf_est_M[5,],Nf$Pe),na.rm=TRUE)), xlab="Year",
```

Peyral

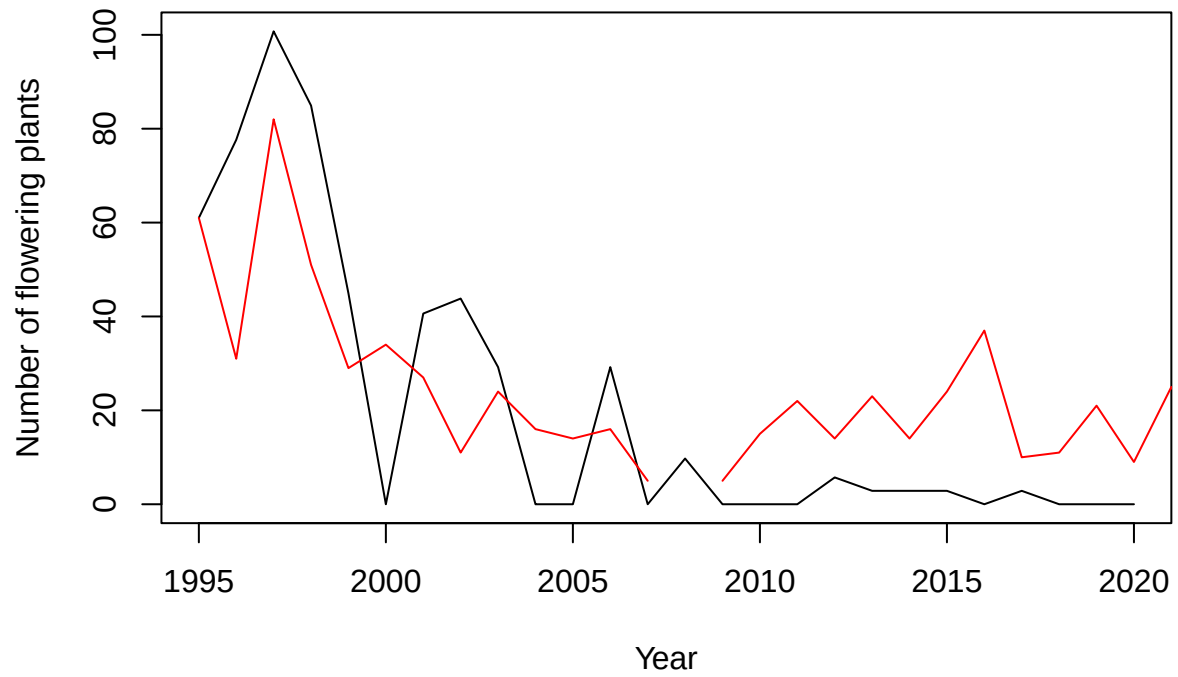

```
plot(y=Nf_est_M[6,], x=anneesMPM,type="l",ylim=c(0,max(c(Nf_est_M[6,],Nf$Cr),na.rm=TRUE)), xlab="Year",
```

Cruzade

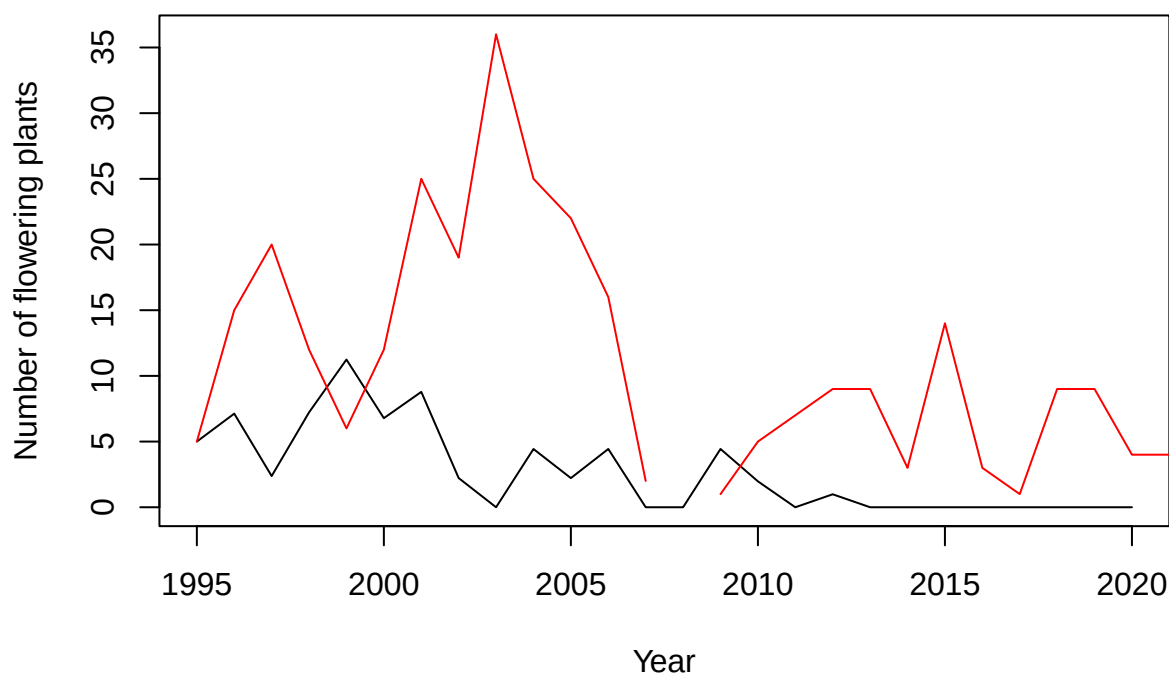

```
Nb_flower_MPM <- expand_grid(
  Pop = populations,
  year = annees[-c(27,28)])
Nb_flower_MPM$estimated_nb_flw <- as.vector(t(Nf_est_M))
Nb_flower_MPM$observed_nb_flw[Nb_flower_MPM$Pop=="E2"] <- Nf$E2
Nb_flower_MPM$observed_nb_flw[Nb_flower_MPM$Pop=="E1"] <- Nf$E1
Nb_flower_MPM$observed_nb_flw[Nb_flower_MPM$Pop=="Au"] <- Nf$Au
Nb_flower_MPM$observed_nb_flw[Nb_flower_MPM$Pop=="Po"] <- Nf$Po
Nb_flower_MPM$observed_nb_flw[Nb_flower_MPM$Pop=="Pe"] <- Nf$Pe
Nb_flower_MPM$observed_nb_flw[Nb_flower_MPM$Pop=="Cr"] <- Nf$Cr
Nb_flower_MPM <- Nb_flower_MPM %>%
  group_by(Pop) %>%
  mutate(lim = max(observed_nb_flw,estimated_nb_flw,na.rm=TRUE))
#All populations summed
sumPopMPM <- tibble(Pop = "SummedPop",
  observed_nb_flw = Nf_tot[-c(27,28)],
  estimated_nb_flw = (Nb_flower_MPM %>% group_by(year) %>% summarize(estimated_nb_flw = sum(est.
  year = annees[-c(27,28)]))

Nb_flower_MPM2 <- bind_rows(Nb_flower_MPM,sumPopMPM)

r2_data_M <- Nb_flower_MPM2 %>%
  group_by(Pop) %>%
  summarise(
    r2 = summary(lm(estimated_nb_flw ~ observed_nb_flw))$r.squared,
    biais = mean(estimated_nb_flw - observed_nb_flw, na.rm = TRUE),
```

```

biais_relatif = 100 * biais / mean(observed_nb_flw, na.rm = TRUE))

r2_data_M <- r2_data_M %>%
  add_row(Pop = "AllPop",
    r2 = summary(lm(Nb_flower_MPM$estimated_nb_flw~Nb_flower_MPM$observed_nb_flw))$r.squared,
    biais = mean(Nb_flower_MPM$estimated_nb_flw-Nb_flower_MPM$observed_nb_flw, na.rm=TRUE),
    biais_relatif = 100*mean(Nb_flower_MPM$estimated_nb_flw-Nb_flower_MPM$observed_nb_flw, na.rm=


labels_r2_M <- paste0(r2_data_M$Pop, " (R² = ", round(r2_data$r2, 2), ")")
names(labels_r2) <- r2_data_M$Pop

```

```

## Warning: Removed 6 rows containing missing values or values outside the scale range
## ('geom_point()').

```

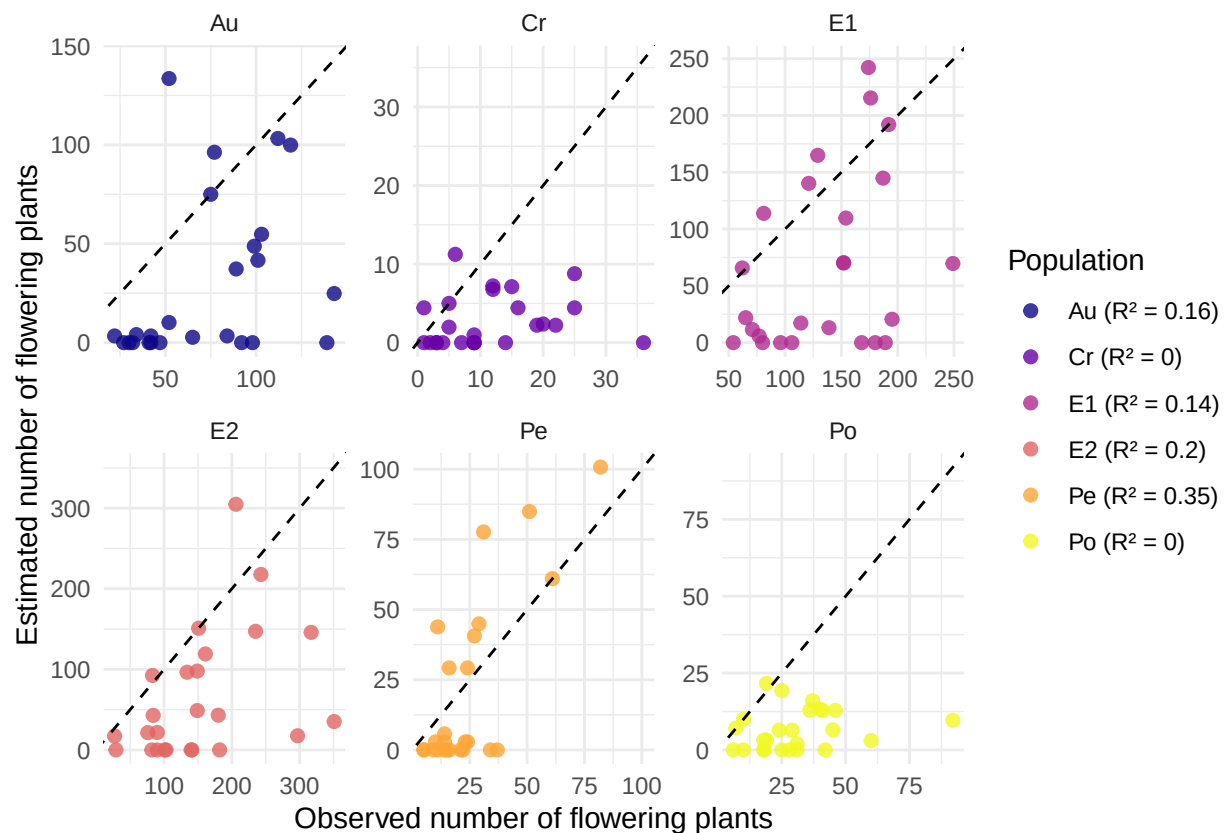


Sum over populations

We sum the number of flowering plants each year to have the total number of flowering plants


```
Nf_est_tot_M <- Nb_flower_MPM2[Nb_flower_MPM2$Pop=="SummedPop",]$estimated_nb_flw
```

Estimated number of flowering plants by years and population.


```
plot(y=Nf_est_tot_M, x=anneesMPM, type="l", xlab="Year", ylab="Number of flowering plants", ylim = c(0,1
```

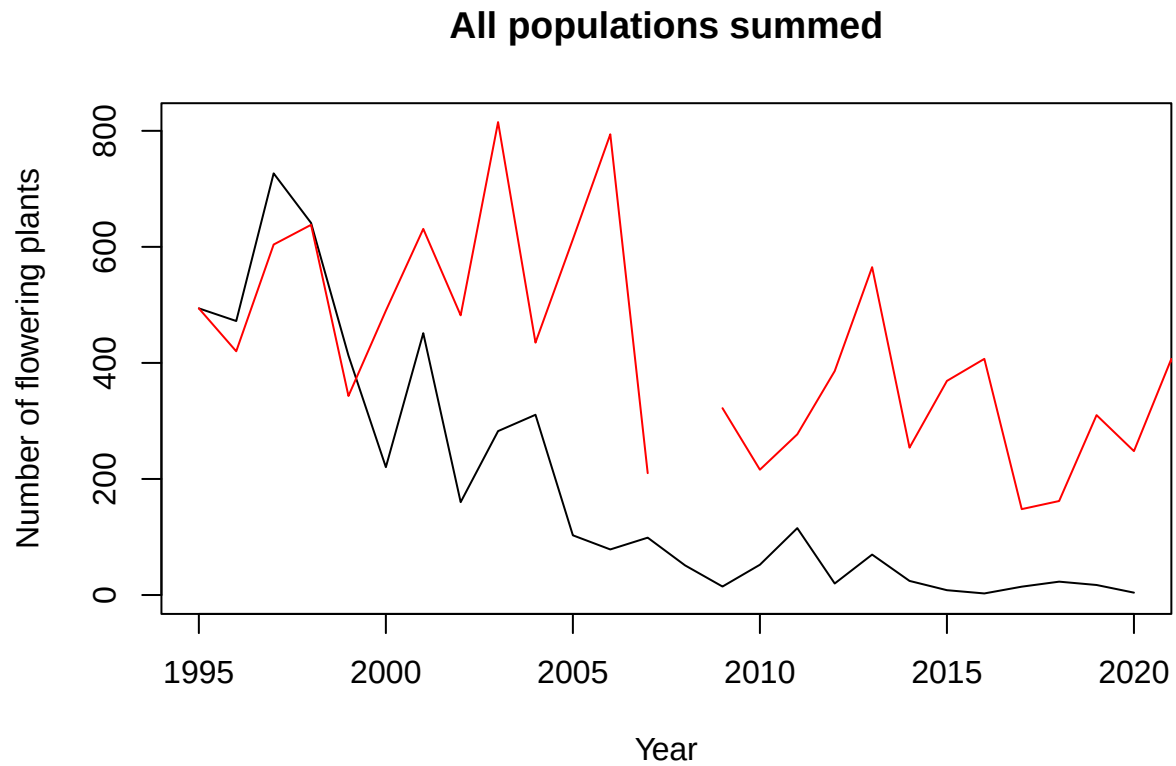


```
## Warning: Removed 1 row containing missing values or values outside the scale range  
## ('geom_point()').
```

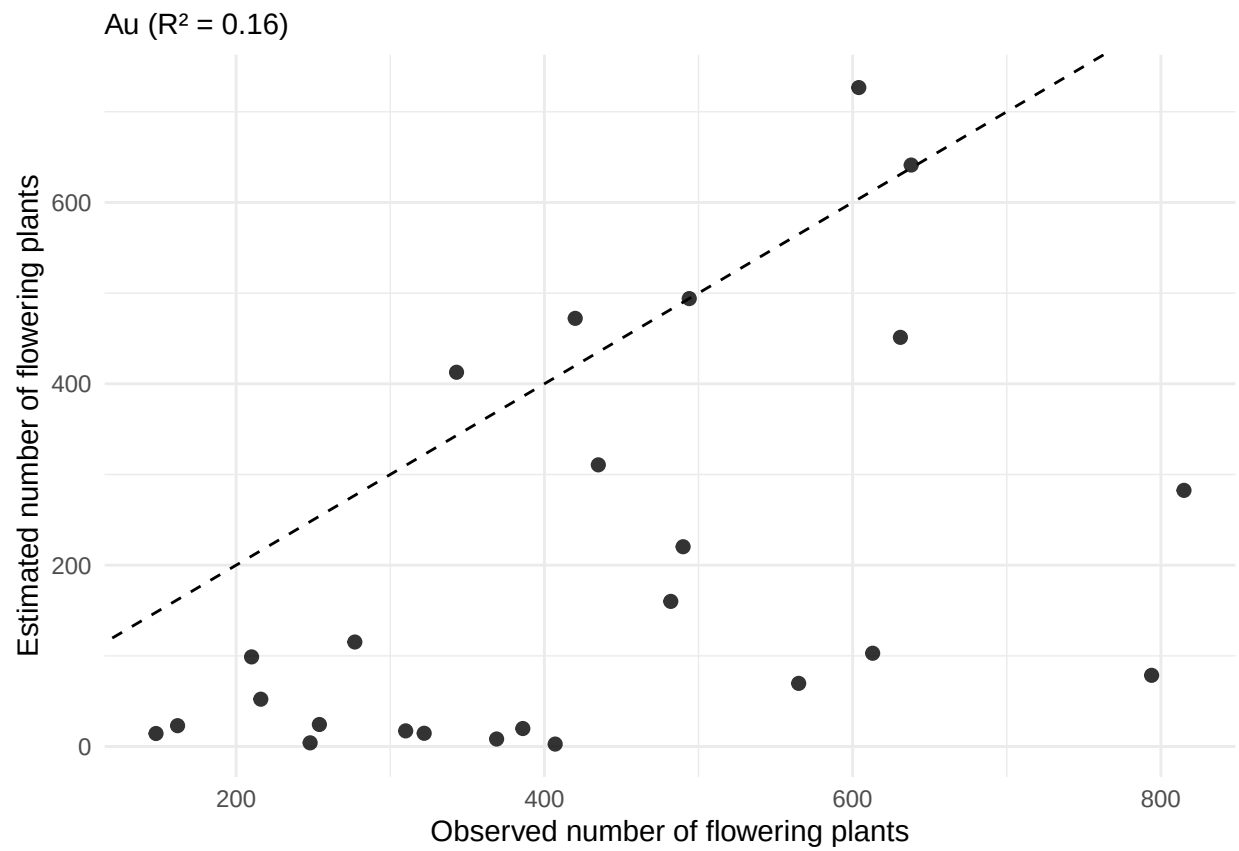

Plots all Pop together

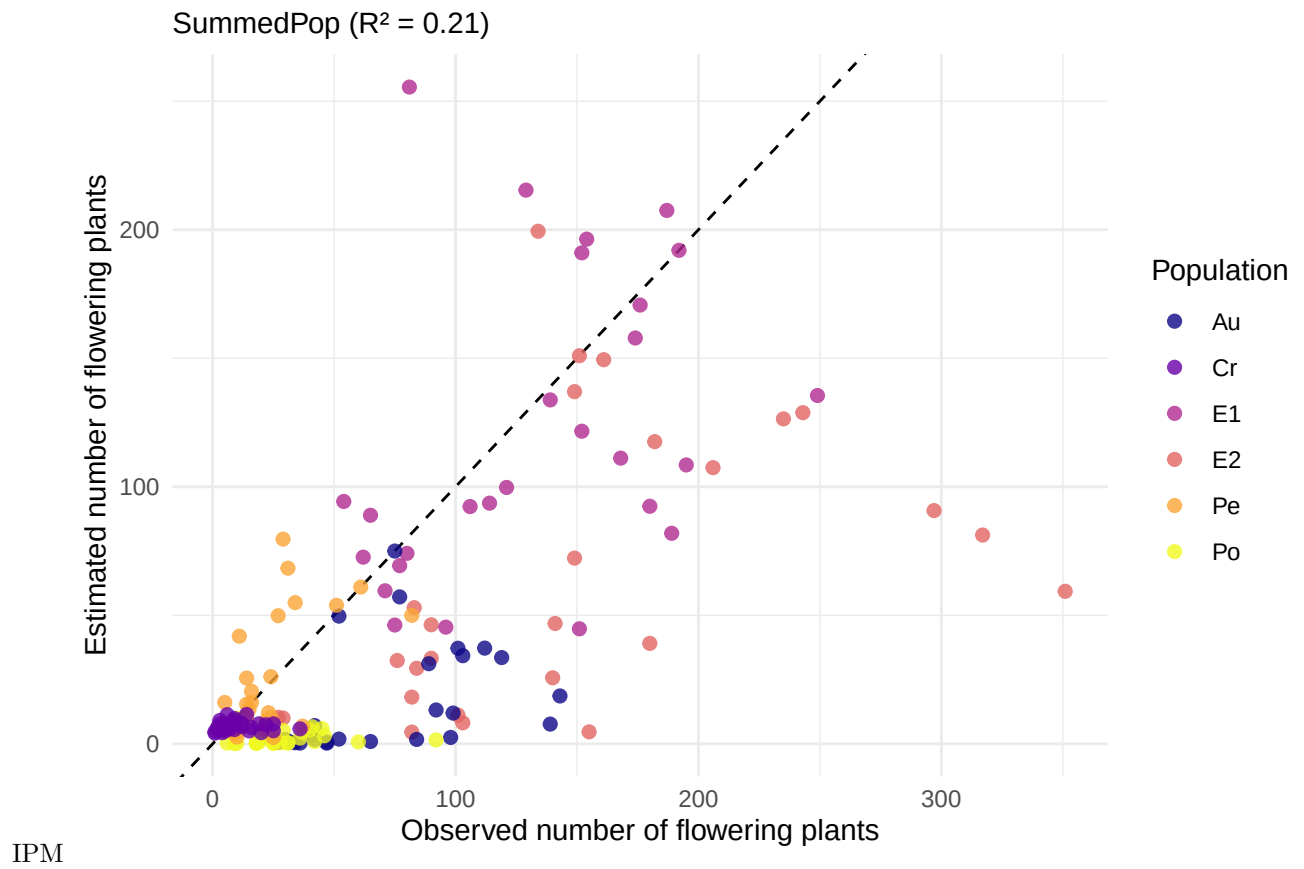

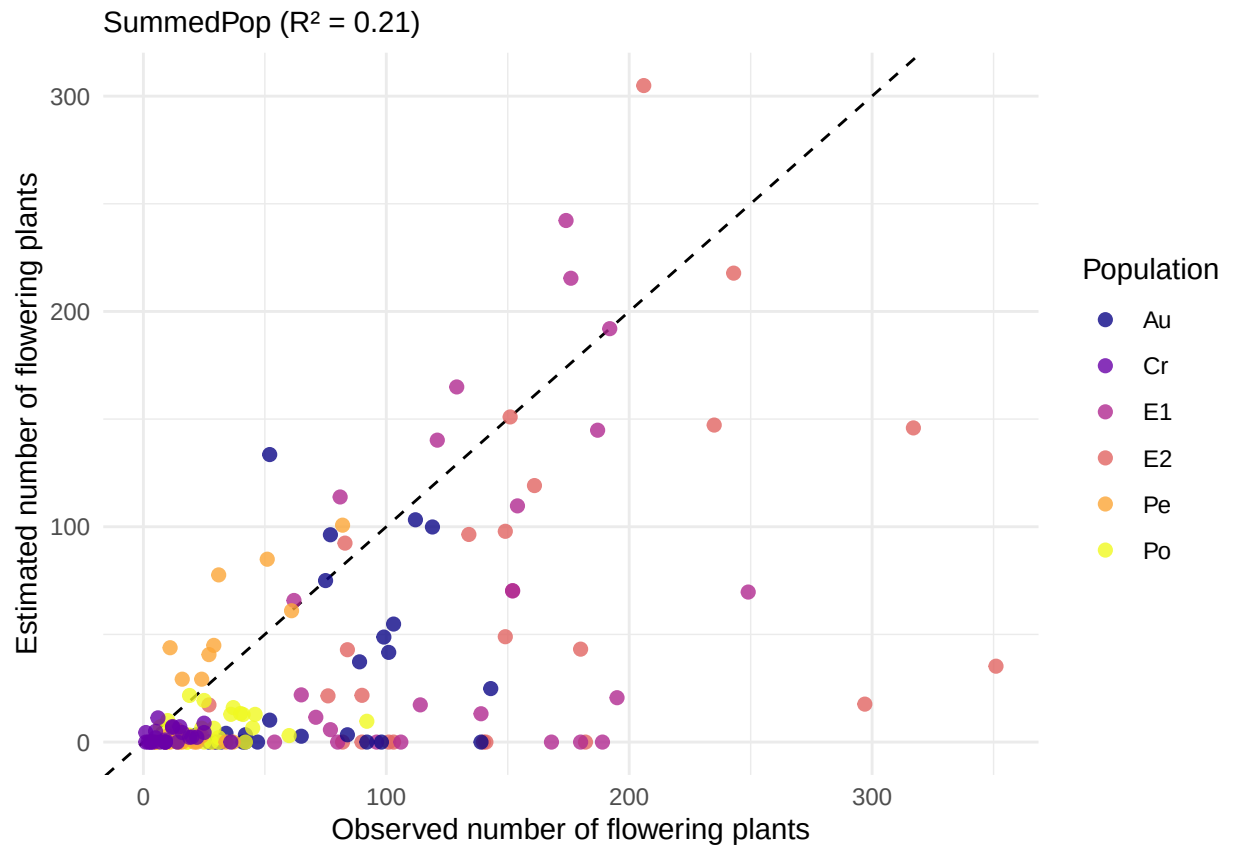


Matrix model

Comparaison r^2 et biais

$\text{biais} = \text{mean}(\text{estimated_nb_flw} - \text{observed_nb_flw})$ $\text{biais_relatif} = 100 * \text{biais} / \text{mean}(\text{observed_nb_flw})$

Le biais relatif permet la comparaison des biais sachant qu'il y a de grandes variations de nombre de plantes en

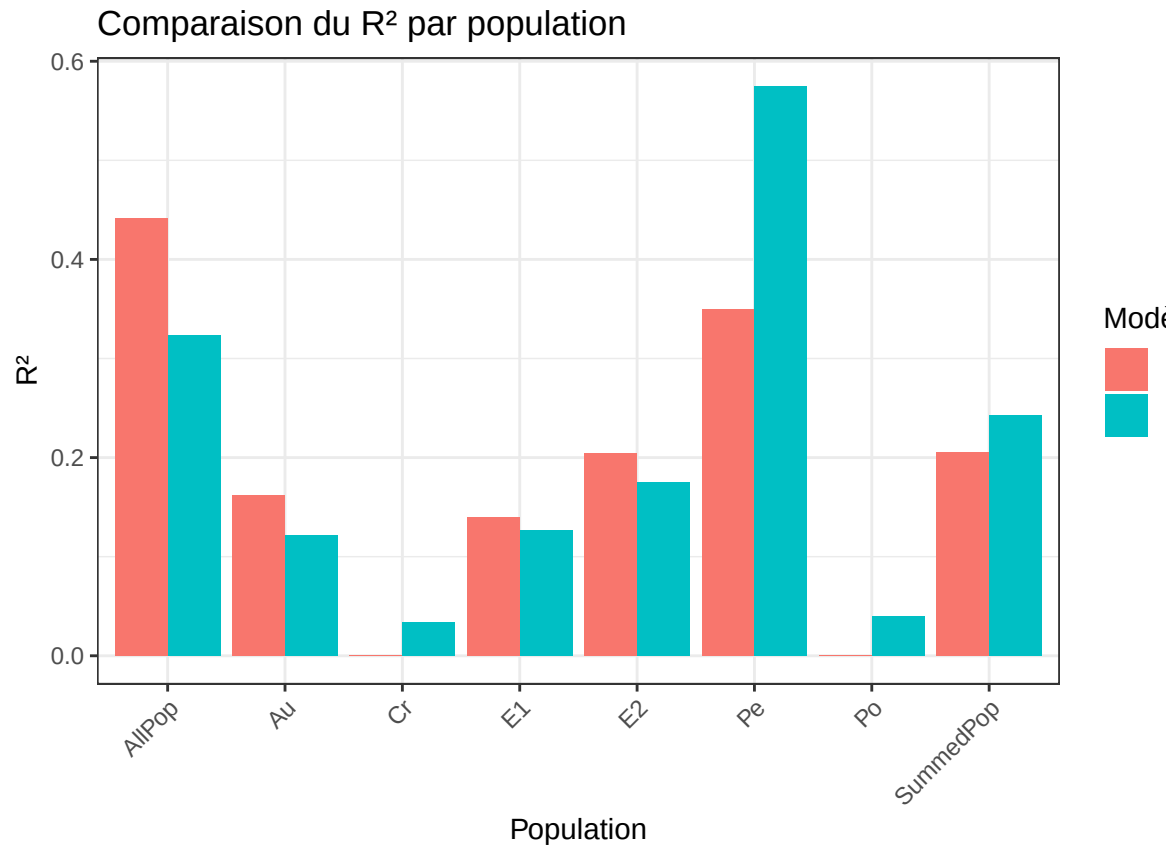

fleur entre populations.

