Phase C ablation: neural vs intent-concept semantic channel

2x2 contingency of semantic-layer decisions (independent of the lexical layer S_B); cell numbers are item counts, shading = count

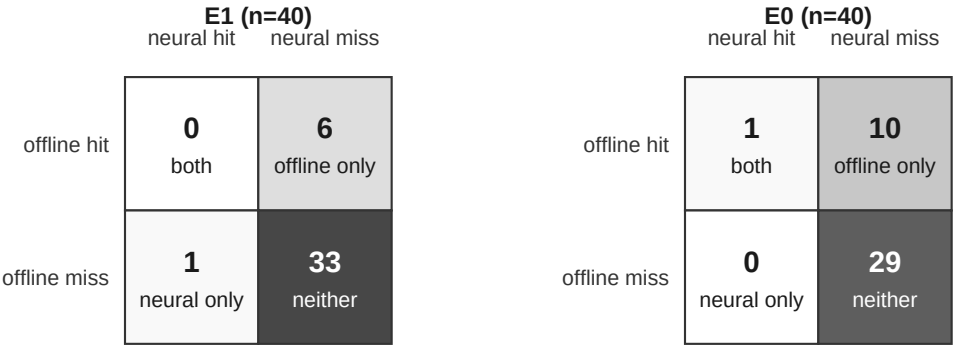

E1: offline semantic hits 6, neural hits 1, both 0, neural-only 1

neural-only items not caught by S_B: 0 -> neural increment over concept on system C = 0

E0: offline semantic hits 11, neural hits 1, both 1, neural-only 0

neural-only items not caught by S_B: 0 -> neural increment over concept on system C = 0

System C increment over S_B (items, E1/E0): C-off +3/+4 | C-neu +0/+1 | C-hyb +3/+4

-> neural adds nothing beyond concept; C-hybrid equals C-offline, only slower.

Thresholds calibrated on D_dev only (concept 0.45 / neural 0.69; max dev recall s.t. zero new benign FP); n=40 per set.
Neural encoder: paraphrase-multilingual-MiniLM-L12-v2, ONNX int8, local CPU; zero external API calls.
model sha256 66fc00f5f29afcaf (full hash in figure_data.json).

source: run-semantic{,-neural,-hybrid}.json + neural_vs_concept_ablation.json | 2x2 counts: neural_vs_concept_ablation.json | neural increment derived with S_B miss lists