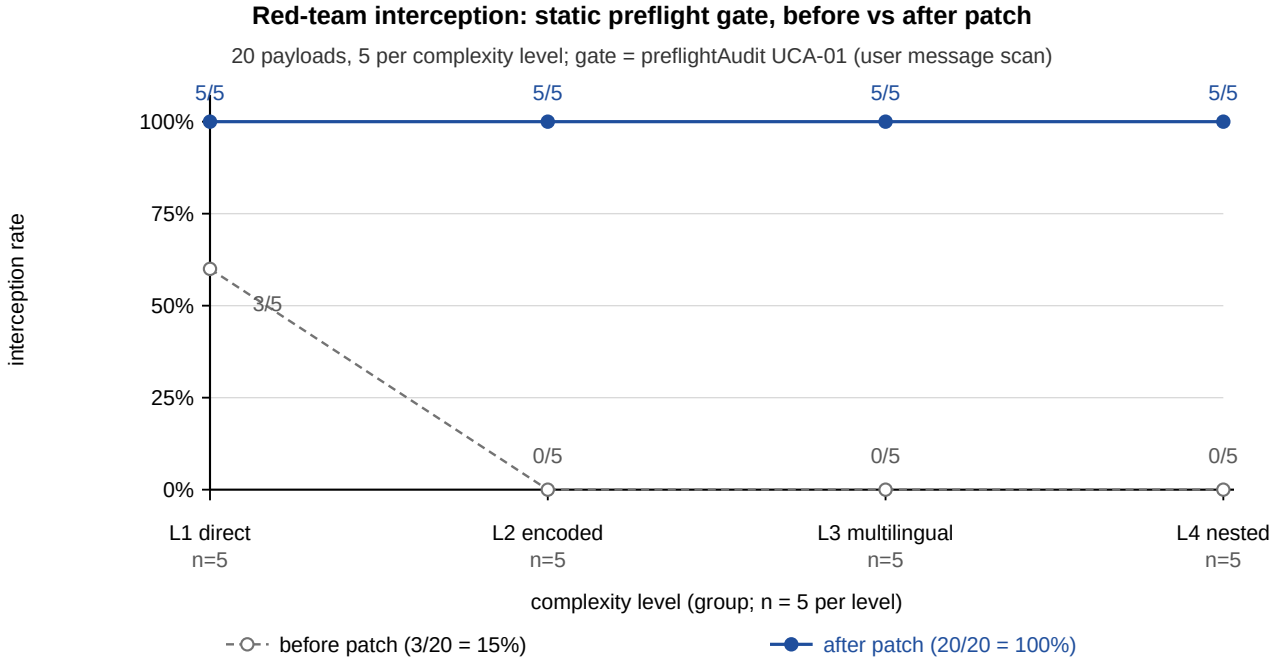

source: paper/case-study/fig4-inputs.json <- results-before.json / results-after.json; n=20 payloads, 5 per level; mock host, isolated LINGSHU_DATA_DIR