
Assignment1


viernes, 23 de octubre de 2026 10:02 p. m.

Steps 1 to 4 are not logged in here because they suppose repository and host actions needed to continue with assignment. By having steps 5 and ahead is clear this steps have been done.

Below I show a summary of all assignment steps using github view of commits:

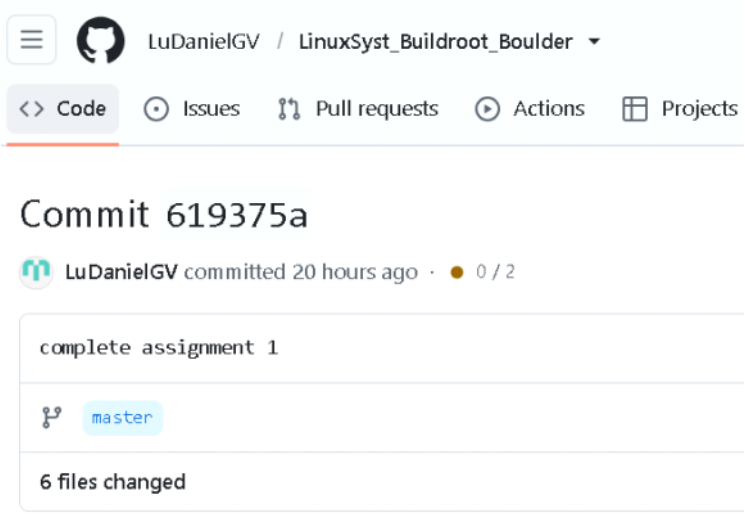

5) Update file **conf/username.txt** to include your github username (no leading/trailing spaces, no additional lines).

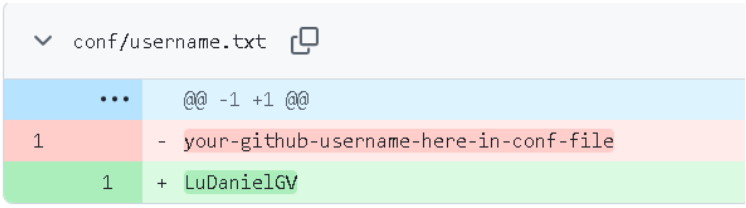

6) Implement the **Test_validate_username.c** function in your assignment repository.

student-test/assignment1/Test_validate_username.c

```
@@ -14,9 +14,13 @@
 */
void test_validate_my_username()
{
-    /**
-     * TODO: Replace the line below with your code here as described above to verify your /conf/username.txt
-     * config file and my_username() functions are setup properly
-     */
-    TEST_ASSERT_TRUE_MESSAGE(false,"AESD students, please fix me!");
+    const char* expected_username = my_username();
+    char* file_username = malloc_username_from_conf_file();
+
+    TEST_ASSERT_EQUAL_STRING_MESSAGE(
+      expected_username,
+      file_username,
+      "Content in username.txt does not match my_username()");
+
+    free(file_username);
}
```


7) Update your username in **autotest-validate.c.**

examples/autotest-validate/autotest-validate.c

```
@@ -27,5 +27,5 @@ bool this_function_returns_false()
 */
const char *my_username()
{
-    return "todo-please-enter-your-username-here-in-my_username";
+    return "LuDanielGV";
}
```

8) Re-run the **./unit-test.sh** script. The script should now get past the failure message above and the unit tests should now pass. This verifies the Unity unit test function stubs requirements.

>Run from my host:

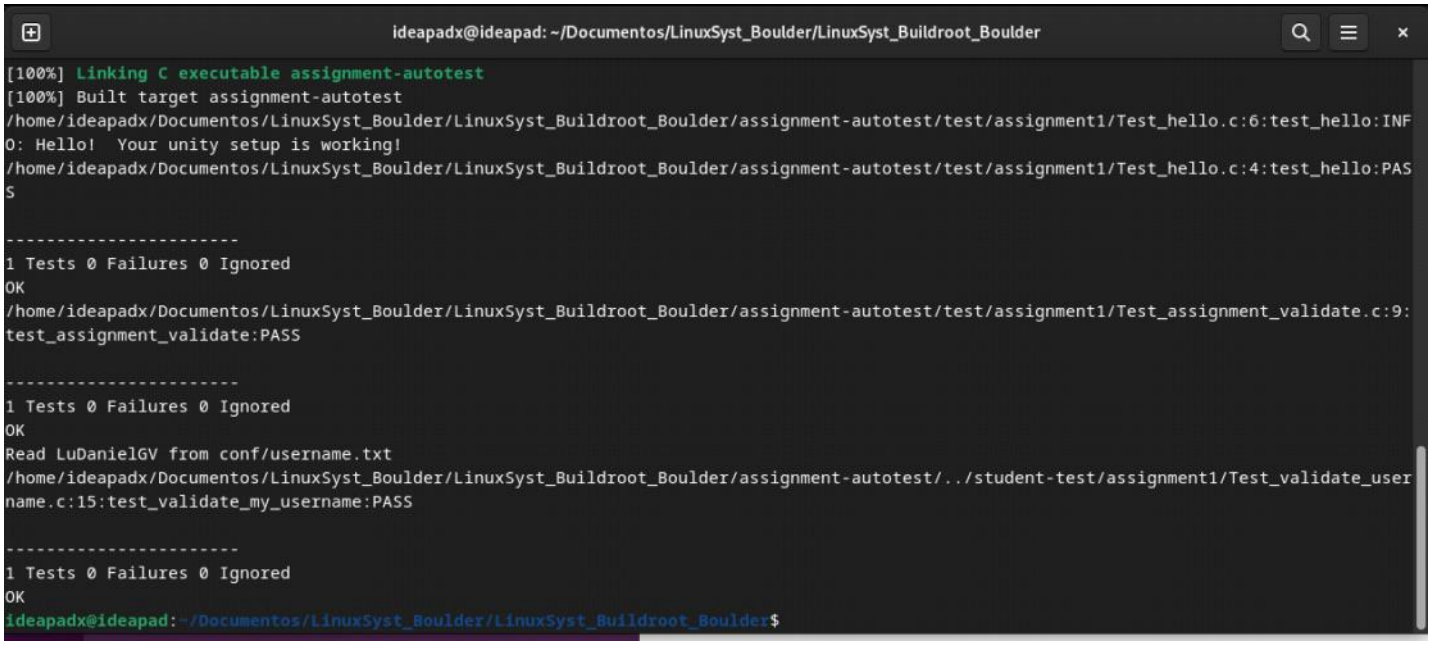

9) Write a shell script **finder-app/finder.sh** as described below:

- Accepts the following runtime arguments: the first argument is a path to a directory on the filesystem, referred to below as **filesdir**; the second argument is a text string which will be searched within these files, referred to below as **searchstr**
- Exits with return value 1 error and print statements if any of the parameters above were not specified
- Exits with return value 1 error and print statements if **filesdir** does not represent a directory on the filesystem
- Prints a message "The number of files are X and the number of matching lines are Y" where X is the number of files in the directory and all subdirectories and Y is the number of matching lines found in respective files, where a matching line refers to a line which contains **searchstr** (and may also contain additional content).

finder-app/finder.sh

```
@@ -0,0 +1,30 @@
+ #bash ./finder.sh /tmp/aeld-data linux
+
+ if [ $# -lt 2 ]; then
+     echo "not enough arguments"
+     exit 1
+ elif [ ! -d $1 ]; then
+     echo "not a filedir"
+     exit 1
+ else
+     echo "ok"
+ fi
+
+ #X is the number of files in directory and all subdirectories
+ X=$(find $1 -type f | wc -l)
+
+ #Y is the number of matching lines found in respective files, where a matching line refers to a line which contains searchstr
+ #(and may also contain additional content).
+ Y=$(grep -rc -h $2 $1 | awk '{suma += $1} END {print suma}')
+
+ echo "The number of files are $X and the number of matching lines are $Y"
+
+ exit 0
```

>Comment: Using example of invocation provided in instructions -finder.sh /tmp/aesd/assignment1 linux- did not work for me. Maybe it is because I am on a Debian machine (contrary to Ubuntu suggestion), but in my machine it is neccesary to use -bash ./finder.sh /tmp/aeld-data linux-

Actually this detail made to perform some script changes also in file finder-test.sh and full.test.sh because this scripts use the problematic (for me) invocation. For example:

finder-app/finder-test.sh

```
@@ -34,7 +34,7 @@ rm -rf "${WRITEDIR}"
34 34   # create $WRITEDIR if not assignment1
35 35   assignment=`cat ../conf/assignment.txt`
36 36
37    - if [ $assignment != 'assignment1' ]
   37   + if [ $assignment == 'assignment1' ]
38 38   then
39 39       mkdir -p "$WRITEDIR"
40 40
@@ -54,10 +54,10 @@ fi
54 54
55 55   for i in $( seq 1 $NUMFILES)
56 56   do
57    -     ./writer.sh "$WRITEDIR/${username}$i.txt" "$WRITESTR"
   57   +     bash ./writer.sh "$WRITEDIR/${username}$i.txt" "$WRITESTR"
58 58   done
59 59
60    - OUTPUTSTRING=$(./finder.sh "$WRITEDIR" "$WRITESTR")
   60   + OUTPUTSTRING=$(bash ./finder.sh "$WRITEDIR" "$WRITESTR")
61 61
```

Also notice that on line 37 of file finder-test.sh I did another change because there is a logic issue with this script. I think that the assignment string should not be different but EQUAL to assignment 1 for the script to work.

10) Write a shell script **finder-app/writer.sh** as described below

- Accepts the following arguments: the first argument is a full path to a file (including filename) on the filesystem, referred to below as **writefile**; the second argument is a text string which will be written within this file, referred to below as **writestr**
- Exits with value 1 error and print statements if any of the arguments above were not specified
- Creates a new file with name and path **writefile** with content **writestr**, overwriting any existing file and creating the path if it doesn't exist. Exits with value 1 and error print statement if the file could not be created.

finder-app/writer.sh


```
@@ -0,0 +1,27 @@
+ # bash ./writer.sh /tmp/aeld-data/temp3.txt linux
+
+ writefile="$1"
+ writestr="$2"
+
+ if [ $# -lt 2 ]; then
+     echo "not enough arguments"
+     exit 1
+ fi
+
+ # Create the parent directory if it doesn't exist
+ mkdir -p "$(dirname "$writefile")"
+
+ # Write the string to the file
+ if ! echo "$writestr" > "$writefile"; then
+     echo "Error: could not create file"
+     exit 1
+ fi
```

11) Run the shell script **finder-test.sh** provided with your assignment github repository to test your implementations. This script:

>Run from my host:

```
ideapadx@ideapad: ~/Documentos/LinuxSyst_Boulder/LinuxSyst_Buildroot_Boulder/finder-app
ideapadx@ideapad:~/Documentos/LinuxSyst_Boulder/LinuxSyst_Buildroot_Boulder/finder-app$ ls
conf  finder.sh  finder-test.sh  writer.sh
ideapadx@ideapad:~/Documentos/LinuxSyst_Boulder/LinuxSyst_Buildroot_Boulder/finder-app$ bash ./finder-test.sh
Using default value AELD_IS_FUN for string to write
Using default value 10 for number of files to write
Writing 10 files containing string AELD_IS_FUN to /tmp/aeld-data
/tmp/aeld-data created
ok The number of files are 10 and the number of matching lines are 10
success
ideapadx@ideapad:~/Documentos/LinuxSyst_Boulder/LinuxSyst_Buildroot_Boulder/finder-app$
```

12) Test your implementation using the shell script **full-test.sh** and ensure all steps pass.
>Run from my host:

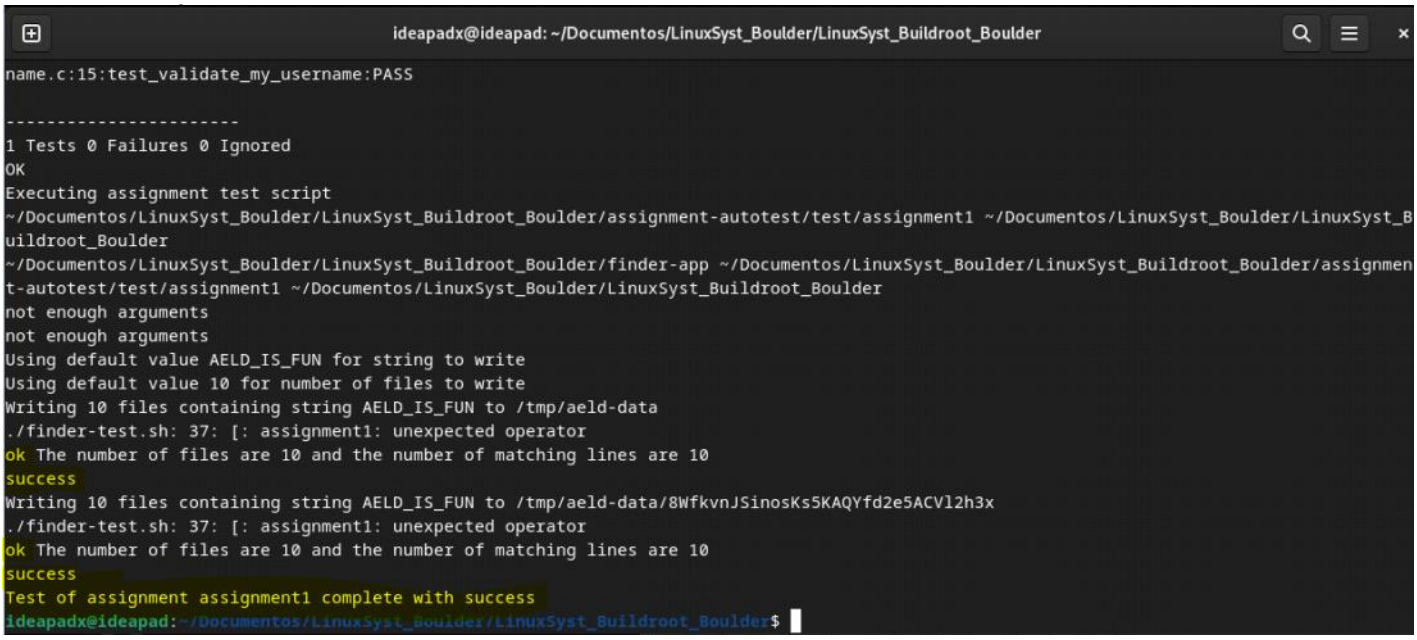

Locally this changes work as shown above, however in the remote course repository it is not clear if the result will be equally satisfactory because of the distribution problem.