


Ping verso Windows non protetto da firewall su rete

Effettuato da Metasploitable2 e Kali Linux:

```
msfadmin@metasploitable:~$ ping 192.168.50.102 -c2
PING 192.168.50.102 (192.168.50.102) 56(84) bytes of data.
64 bytes from 192.168.50.102: icmp_seq=1 ttl=128 time=6.78 ms
64 bytes from 192.168.50.102: icmp_seq=2 ttl=128 time=1.09 ms

--- 192.168.50.102 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1003ms
rtt min/avg/max/mdev = 1.090/3.937/6.784/2.847 ms
msfadmin@metasploitable:~$
```

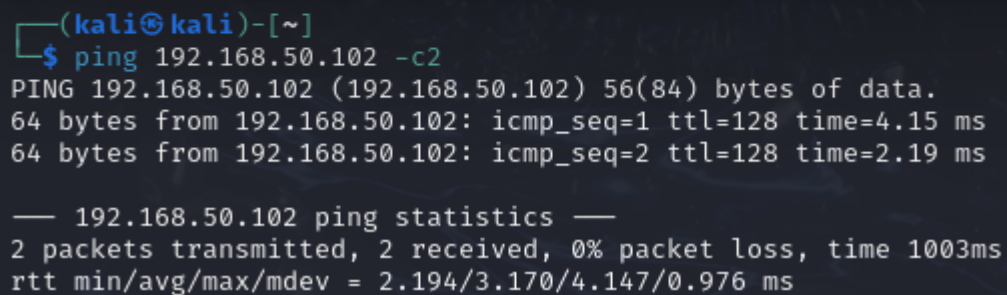

The screenshot shows a Kali Linux desktop environment with a terminal window open. The terminal displays the command `ping 192.168.50.102 -c2` and its output, which includes the ping statistics. The desktop background is dark, and the terminal window has a title bar with the text `(kali@kali)-[~]`. The system tray at the bottom of the terminal window shows various icons, including a network icon, a volume icon, and a power icon.

```
(kali@kali)-[~]
$ ping 192.168.50.102 -c2
PING 192.168.50.102 (192.168.50.102) 56(84) bytes of data.
64 bytes from 192.168.50.102: icmp_seq=1 ttl=128 time=4.15 ms
64 bytes from 192.168.50.102: icmp_seq=2 ttl=128 time=2.19 ms

— 192.168.50.102 ping statistics —
2 packets transmitted, 2 received, 0% packet loss, time 1003ms
rtt min/avg/max/mdev = 2.194/3.170/4.147/0.976 ms
```