


# EECS3421 Project #1 ER

Student#: 214468656

Sur (Family) Name: Lu

Given Name: Yonghao

Section: A

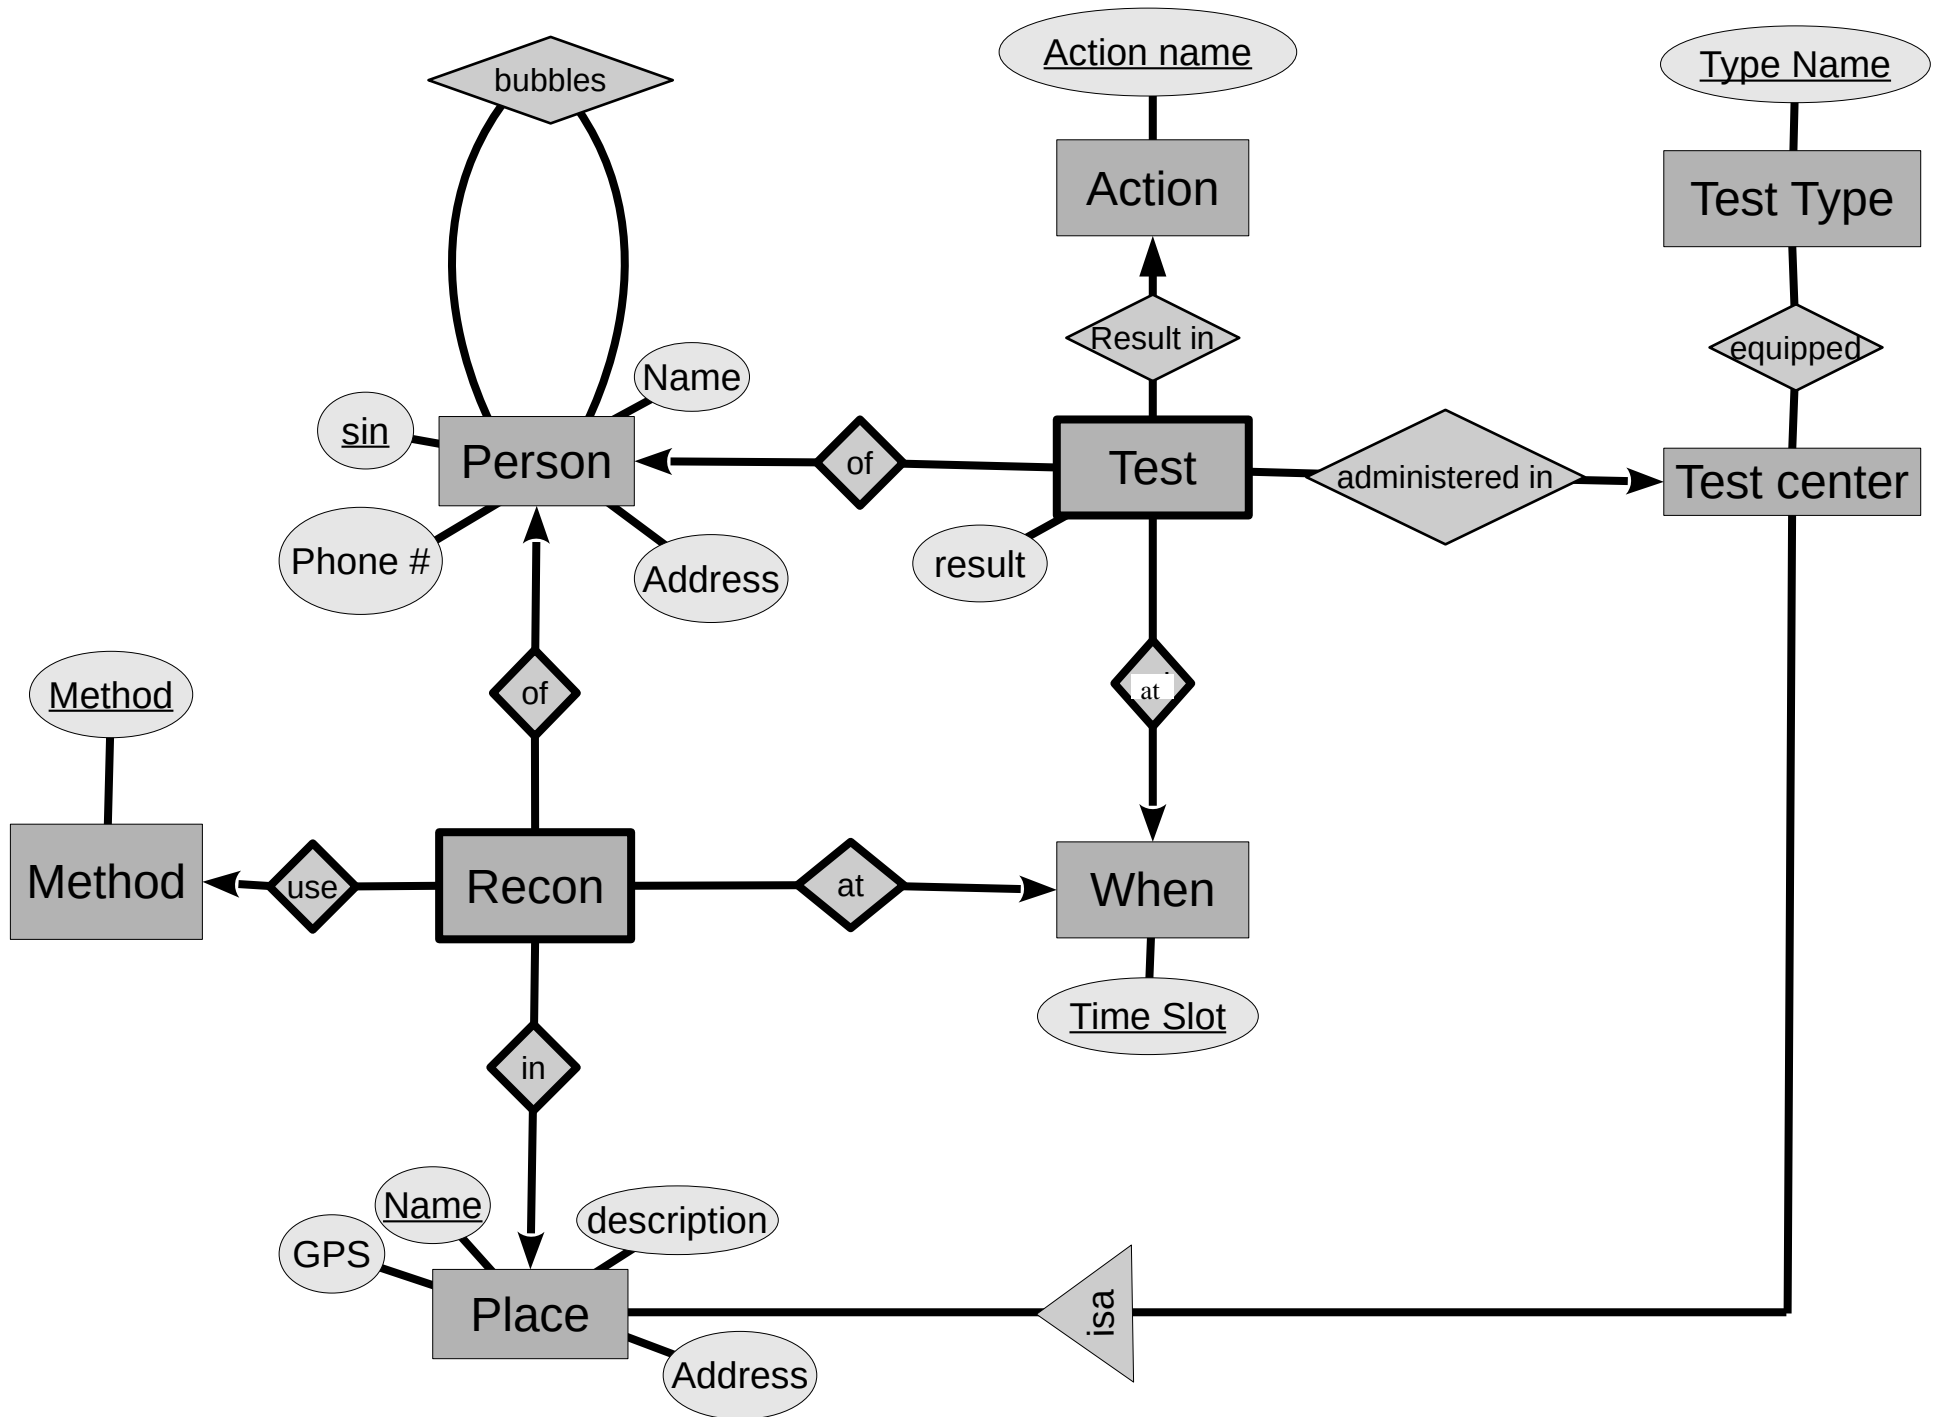

Recon is weak on Person and Place and When so that for each entry of Recon has a Time Slot, Place Name and a Person sin# as its key. I make Recon weak on Method too because I believe an Evidence is important so there must be at least one(mandatory participation) , but it says every Recon may use different Evidence so I make it exact one

Test has a attribute Result, but it was not its key since it was weak on Person and When, it has Person's sin # and Time Slot as its key. (as a person may not get result for a certain time, it could be null and would result a no Action as well).

Test center and Test types should be many to many relation, in real life, I would think a Test center has at least one Test type(mandatory participation) but it is had to do on many to many relation in this form.

There was a typo between the relationship between When and Test, the white color is just for fixing purpose, do not have other meaning