

a A two-stream network fed magno- and parvo-like inputs

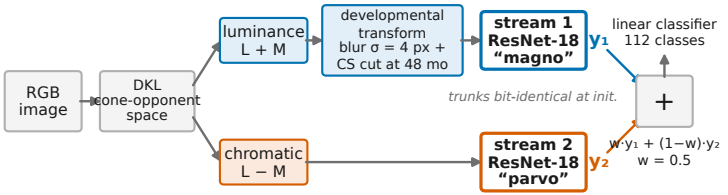

front-end conditions	stream 1 receives	stream 2 receives
diet	luminance + transform	L − M
no diet	luminance	L − M
swap	luminance	L − M + transform
parvo_highsf	luminance + transform	L − M and luminance

b What each stream sees

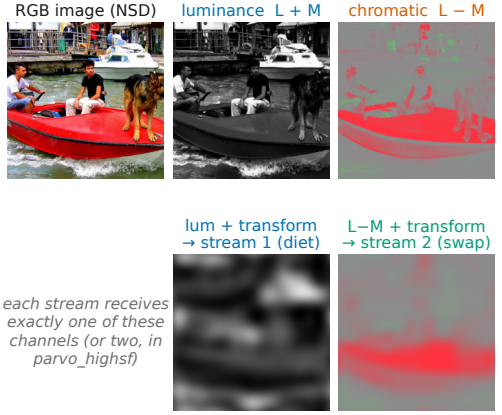

c The diet costs accuracy and destabilises late training

