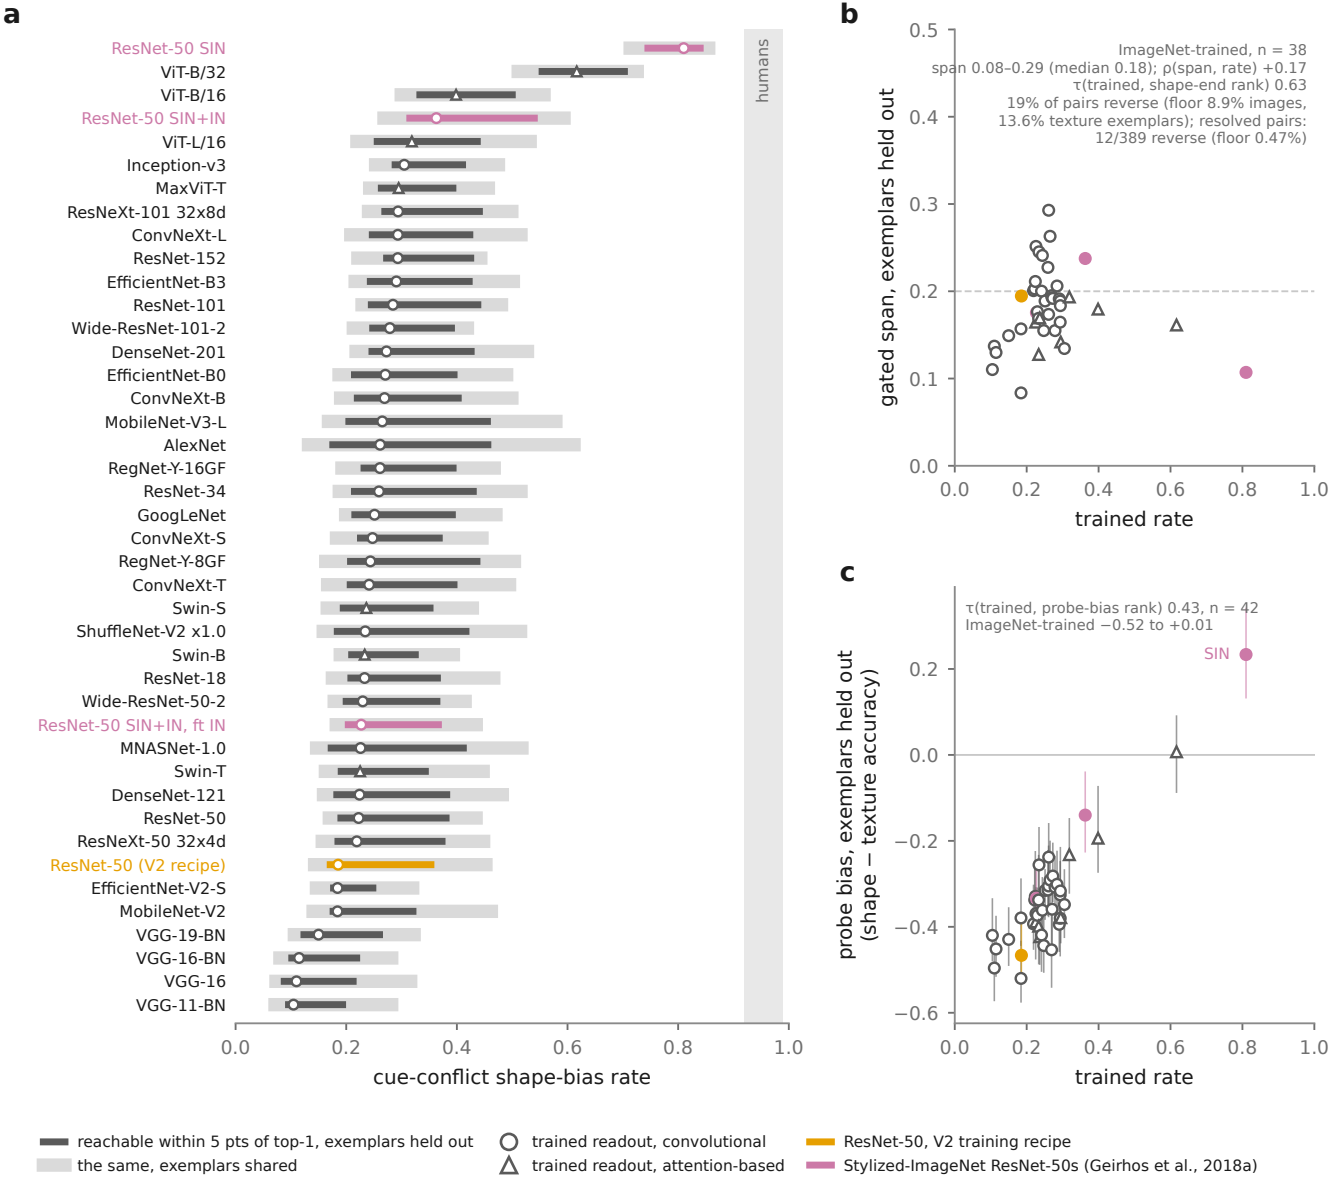
a
ResNet-50 SIN
ViT-B/32
ViT-B/16
ResNet-50 SIN+IN
ViT-L/16
Inception-v3
MaxViT-T
ResNeXt-101 32x8d
ConvNeXt-L
ResNet-152
EfficientNet-B3
ResNet-101
Wide-ResNet-101-2
DenseNet-201
EfficientNet-B0
ConvNeXt-B
MobileNet-V3-L
AlexNet
RegNet-Y-16GF
ResNet-34
GoogLeNet
ConvNeXt-S
RegNet-Y-8GF
ConvNeXt-T
Swin-S
ShuffleNet-V2 x1.0
Swin-B
ResNet-18
Wide-ResNet-50-2
ResNet-50 SIN+IN, ft IN
MNASNet-1.0
Swin-T
DenseNet-121
ResNet-50
ResNeXt-50 32x4d
ResNet-50 (V2 recipe)
EfficientNet-V2-S
MobileNet-V2
VGG-19-BN
VGG-16-BN
VGG-16
VGG-11-BN
humans
0.0
0.2
0.4
0.6
0.8
1.0
cue-conflict shape-bias rate
b
ImageNet-trained, n = 38
span 0.08–0.29 (median 0.18); ρ(span, rate) +0.17
τ(trained, shape-end rank) 0.63
19% of pairs reverse (floor 8.9% images,
13.6% texture exemplars); resolved pairs:
12/389 reverse (floor 0.47%)
gated span, exemplars held out
0.0
0.1
0.2
0.3
0.4
0.5
0.0
0.2
0.4
0.6
0.8
1.0
trained rate
c
τ(trained, probe-bias rank) 0.43, n = 42
ImageNet-trained −0.52 to +0.01
SIN
probe bias, exemplars held out
(shape − texture accuracy)
0.2
0.0
−0.2
−0.4
−0.6
0.0
0.2
0.4
0.6
0.8
1.0
trained rate
reachable within 5 pts of top-1, exemplars held out
the same, exemplars shared
trained readout, convolutional
trained readout, attention-based
ResNet-50, V2 training recipe
Stylized-ImageNet ResNet-50s (Geirhos et al., 2018a)