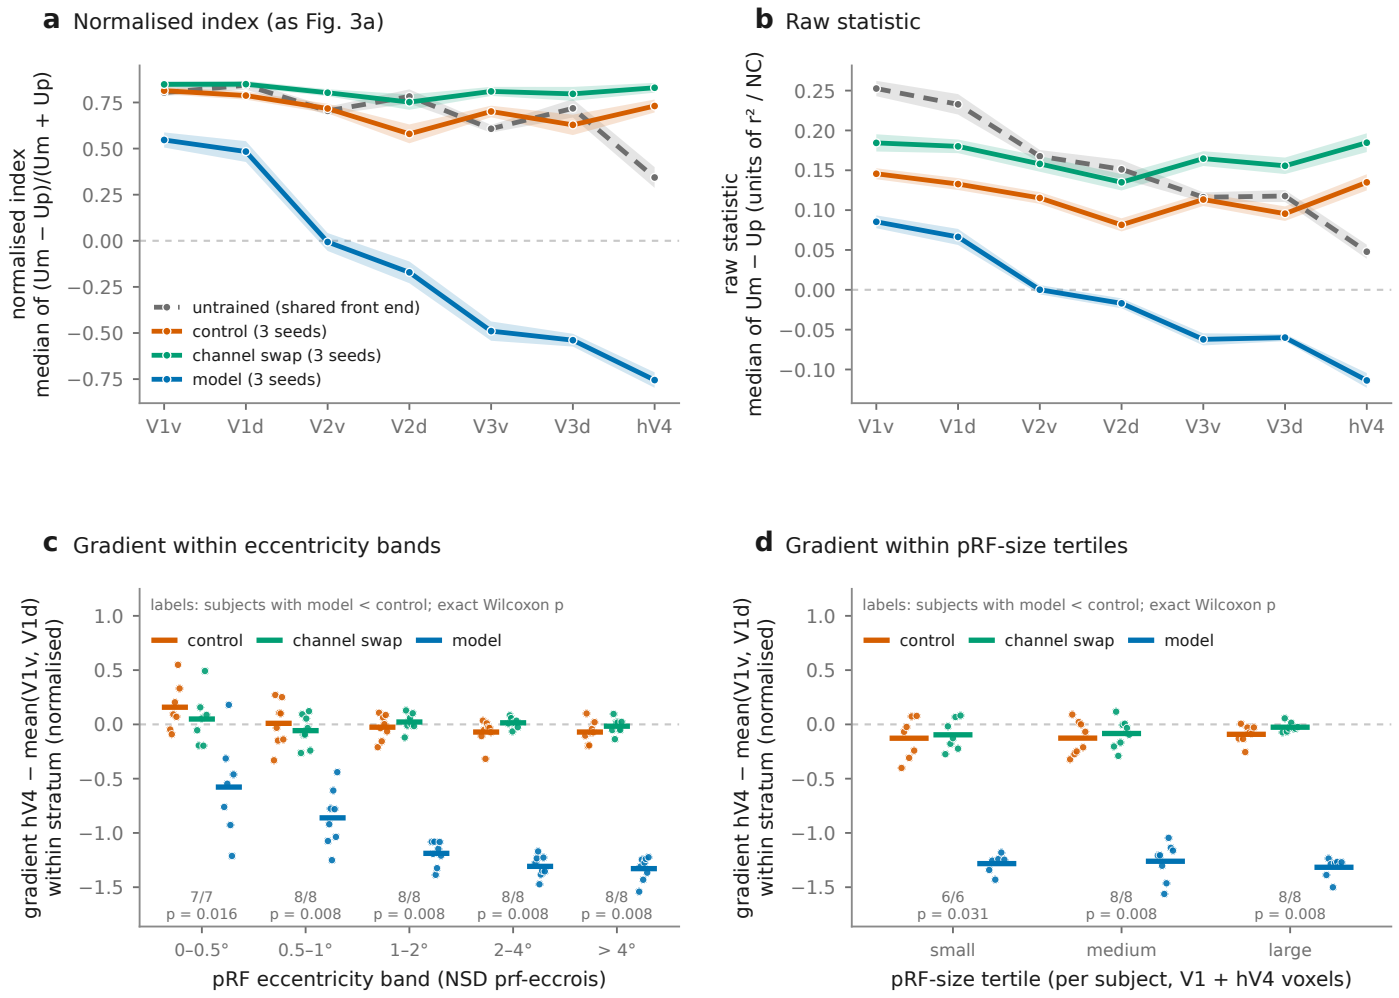
a Normalised index (as Fig. 3a)
normalised index
median of (Um − Up)/(Um + Up)
0.75
0.50
0.25
0.00
−0.25
−0.50
−0.75
untrained (shared front end)
control (3 seeds)
channel swap (3 seeds)
model (3 seeds)
V1v
V1d
V2v
V2d
V3v
V3d
hV4
b Raw statistic
raw statistic
median of Um − Up (units of r² / NC)
0.25
0.20
0.15
0.10
0.05
0.00
−0.05
−0.10
V1v
V1d
V2v
V2d
V3v
V3d
hV4
c Gradient within eccentricity bands
gradient hV4 − mean(V1v, V1d)
within stratum (normalised)
labels: subjects with model < control; exact Wilcoxon p
control
channel swap
model
1.0
0.5
0.0
−0.5
−1.0
−1.5
7/7
p = 0.016
8/8
p = 0.008
8/8
p = 0.008
8/8
p = 0.008
8/8
p = 0.008
0–0.5°
0.5–1°
1–2°
2–4°
> 4°
pRF eccentricity band (NSD prf-eccrois)
d Gradient within pRF-size tertiles
gradient hV4 − mean(V1v, V1d)
within stratum (normalised)
labels: subjects with model < control; exact Wilcoxon p
control
channel swap
model
1.0
0.5
0.0
−0.5
−1.0
−1.5
6/6
p = 0.031
8/8
p = 0.008
8/8
p = 0.008
small
medium
large
pRF-size tertile (per subject, V1 + hV4 voxels)