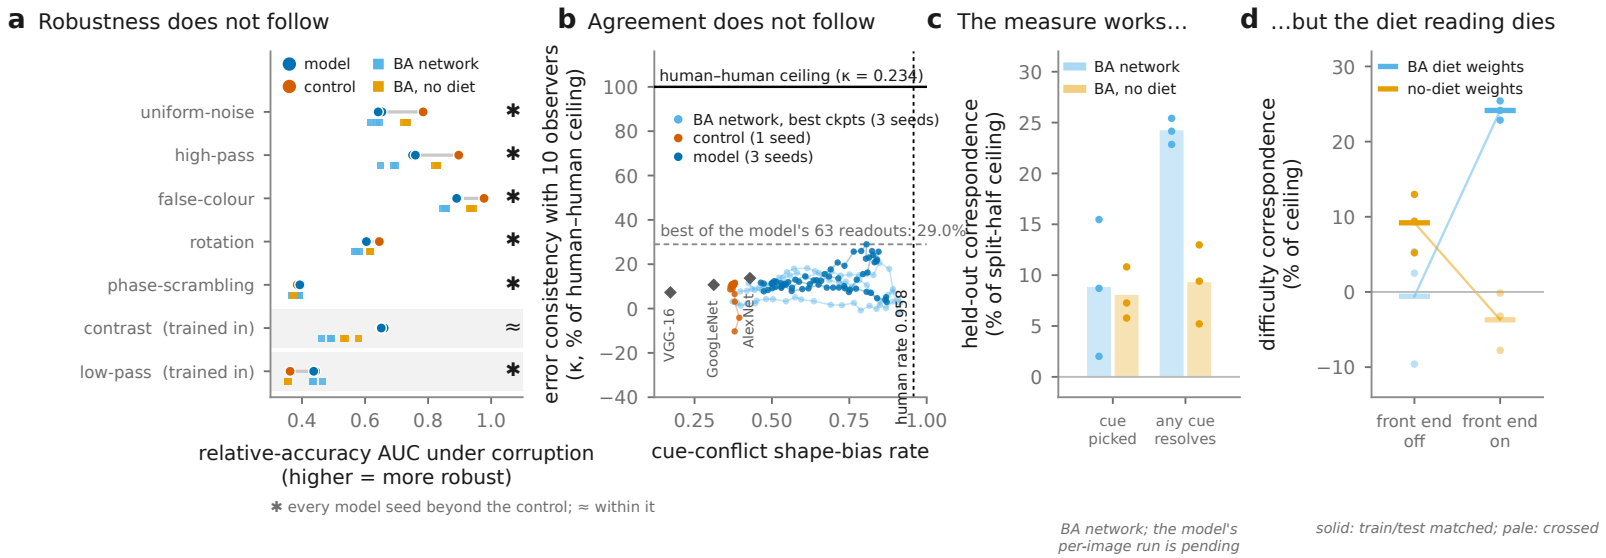
a Robustness does not follow
model
control
BA network
BA, no diet
uniform-noise
high-pass
false-colour
rotation
phase-scrambling
contrast (trained in)
low-pass (trained in)
*
*
*
*
*
≈
*
0.4
0.6
0.8
1.0
relative-accuracy AUC under corruption
(higher = more robust)
* every model seed beyond the control; ≈ within it
b Agreement does not follow
error consistency with 10 observers
(κ, % of human–human ceiling)
human–human ceiling (κ = 0.234)
BA network, best ckpts (3 seeds)
control (1 seed)
model (3 seeds)
best of the model's 63 readouts: 29.0%
VGG-16
GoogLeNet
AlexNet
human rate 0.958
100
80
60
40
20
0
−20
−40
0.25
0.50
0.75
1.00
cue-conflict shape-bias rate
c The measure works...
held-out correspondence
(% of split-half ceiling)
BA network
BA, no diet
30
25
20
15
10
5
0
cue
picked
any cue
resolves
BA network; the model's
per-image run is pending
d ...but the diet reading dies
difficulty correspondence
(% of ceiling)
BA diet weights
no-diet weights
30
20
10
0
−10
front end
off
front end
on
solid: train/test matched; pale: crossed