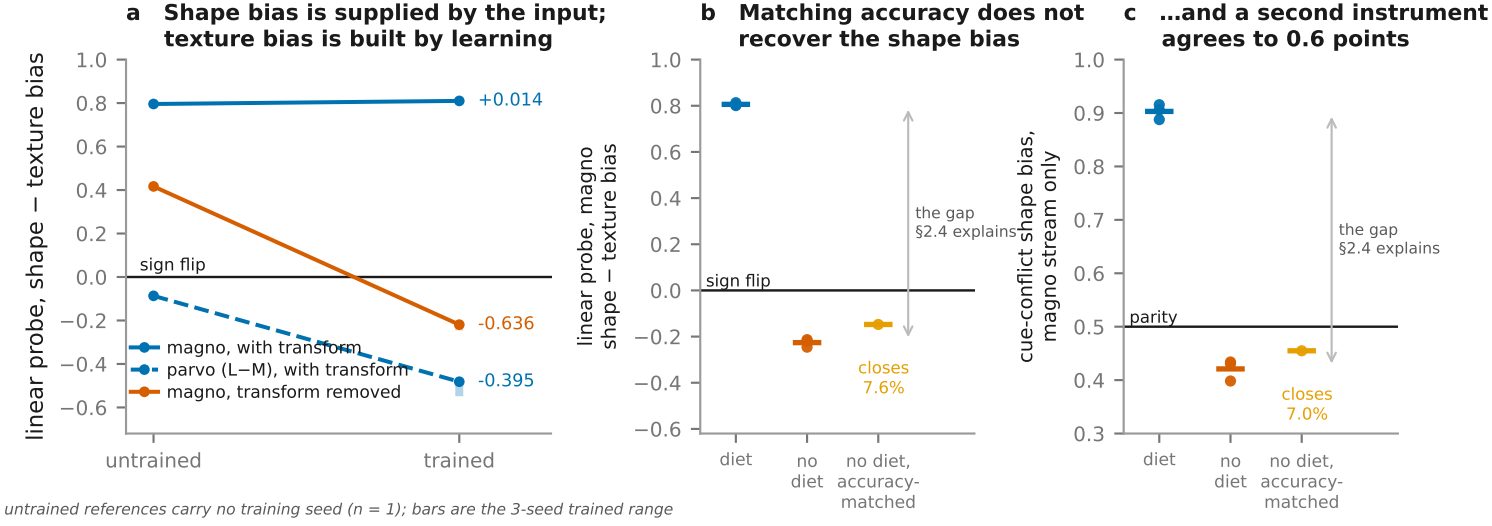

untrained references carry no training seed (n = 1); bars are the 3-seed trained range

accuracy-matched arm is a single retrained run (n = 1)