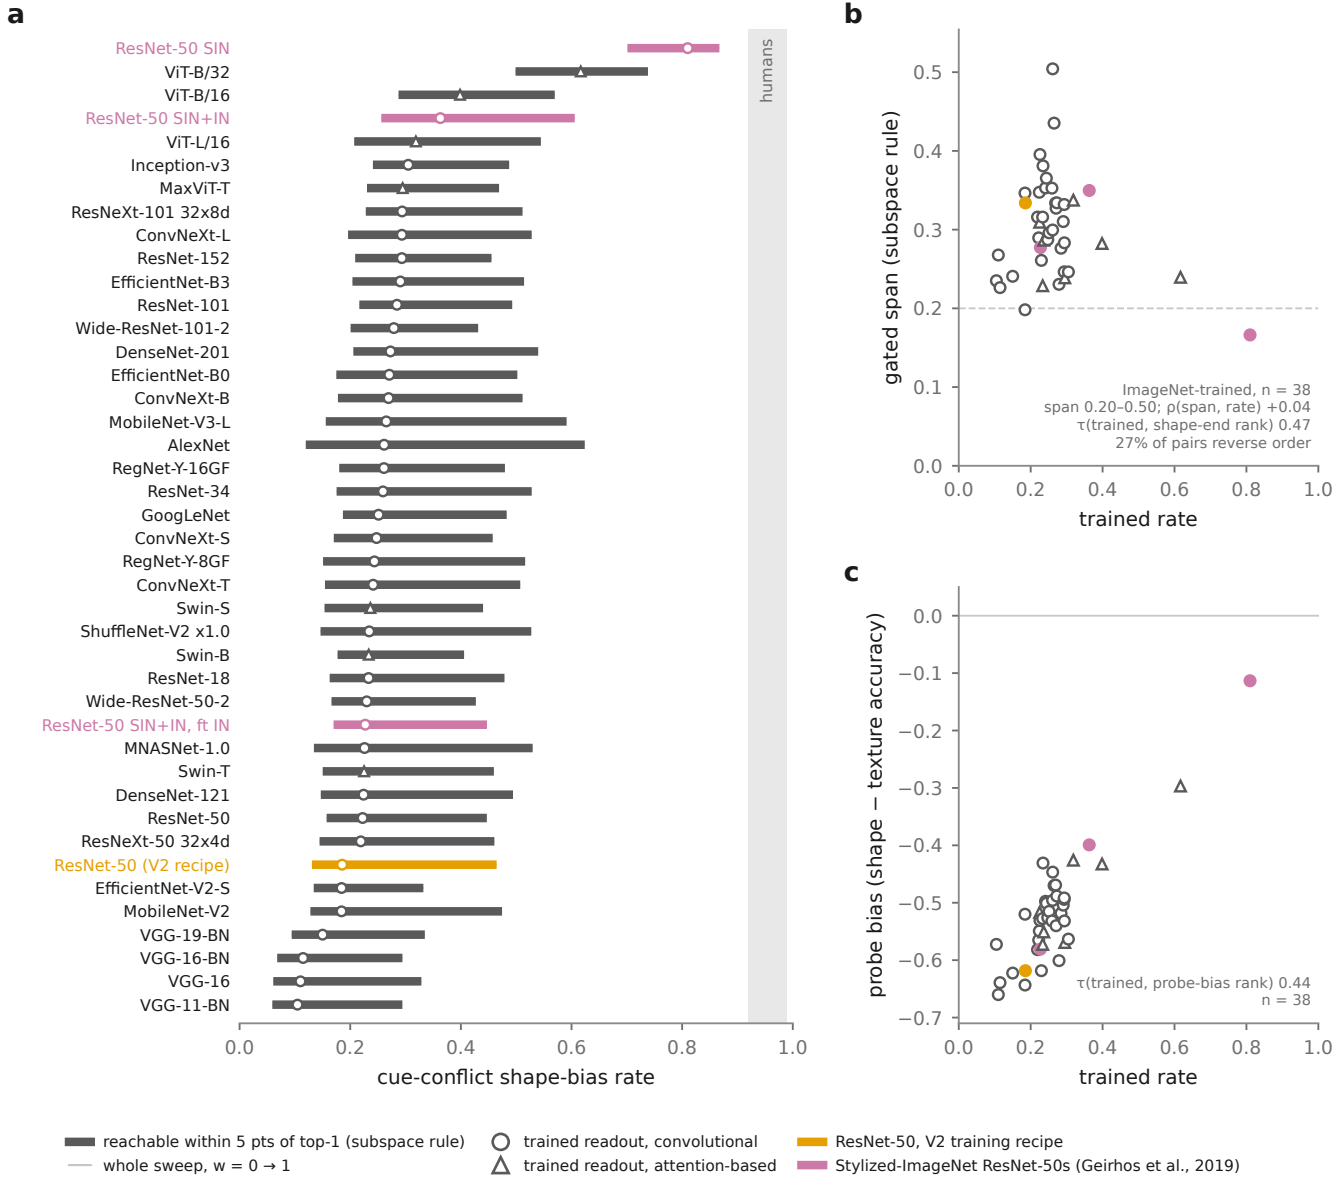
a
ResNet-50 SIN
ViT-B/32
ViT-B/16
ResNet-50 SIN+IN
ViT-L/16
Inception-v3
MaxViT-T
ResNeXt-101 32x8d
ConvNeXt-L
ResNet-152
EfficientNet-B3
ResNet-101
Wide-ResNet-101-2
DenseNet-201
EfficientNet-B0
ConvNeXt-B
MobileNet-V3-L
AlexNet
RegNet-Y-16GF
ResNet-34
GoogLeNet
ConvNeXt-S
RegNet-Y-8GF
ConvNeXt-T
Swin-S
ShuffleNet-V2 x1.0
Swin-B
ResNet-18
Wide-ResNet-50-2
ResNet-50 SIN+IN, ft IN
MNASNet-1.0
Swin-T
DenseNet-121
ResNet-50
ResNeXt-50 32x4d
ResNet-50 (V2 recipe)
EfficientNet-V2-S
MobileNet-V2
VGG-19-BN
VGG-16-BN
VGG-16
VGG-11-BN
humans
0.0
0.2
0.4
0.6
0.8
1.0
cue-conflict shape-bias rate
b
gated span (subspace rule)
0.0
0.1
0.2
0.3
0.4
0.5
ImageNet-trained, n = 38
span 0.20–0.50; ρ(span, rate) +0.04
τ(trained, shape-end rank) 0.47
27% of pairs reverse order
trained rate
c
probe bias (shape − texture accuracy)
0.0
−0.1
−0.2
−0.3
−0.4
−0.5
−0.6
−0.7
τ(trained, probe-bias rank) 0.44
n = 38
trained rate
reachable within 5 pts of top-1 (subspace rule)
whole sweep, w = 0 → 1
trained readout, convolutional
trained readout, attention-based
ResNet-50, V2 training recipe
Stylized-ImageNet ResNet-50s (Geirhos et al., 2019)