



Welcome to

C++

```
3   require File.expand_path("../config/environment")
4   # Prevent database truncation if the environment is :test
5   abort("The Rails environment is running in production mode!") if Rails.env == :production
6   require 'spec_helper'
7   require 'rspec/rails'
8
9   require 'capybara/rspec'
10  require 'capybara/rails'
11
12  Capybara.javascript_driver = :webkit
13  Category.delete_all; Category.create
14  Shoulda::Matchers.configure do |config|
15    config.integrate do |with|
16      with.test_framework :rspec
17      with.library :rails
18    end
19  end
20
21  # Add additional requires below this line if you need them
22
23  # Requires supporting files within the same directory as concerns
24  # spec/support/ and its subdirectories in addition to the primary
25  # in _spec.rb will both be required automatically
26  # run twice. It is recommended that you do not name files
27  # end with _spec.rb. You can configure this pattern through the
28  # --pattern option on the command line or in RSpec.configure block
29
30  # On the command line you would do something like this:
31  # $ rspec spec/controllers/categories_controller_spec.rb
```

Grupo:

- Daniel Alves
- Jadson Souza
- Júlio dos Santos





Origem do




- Bjarne Stroustrup
- Bell Labs
- Núcleo Unix




Bjarne Stroustrup

Núcleo Unix

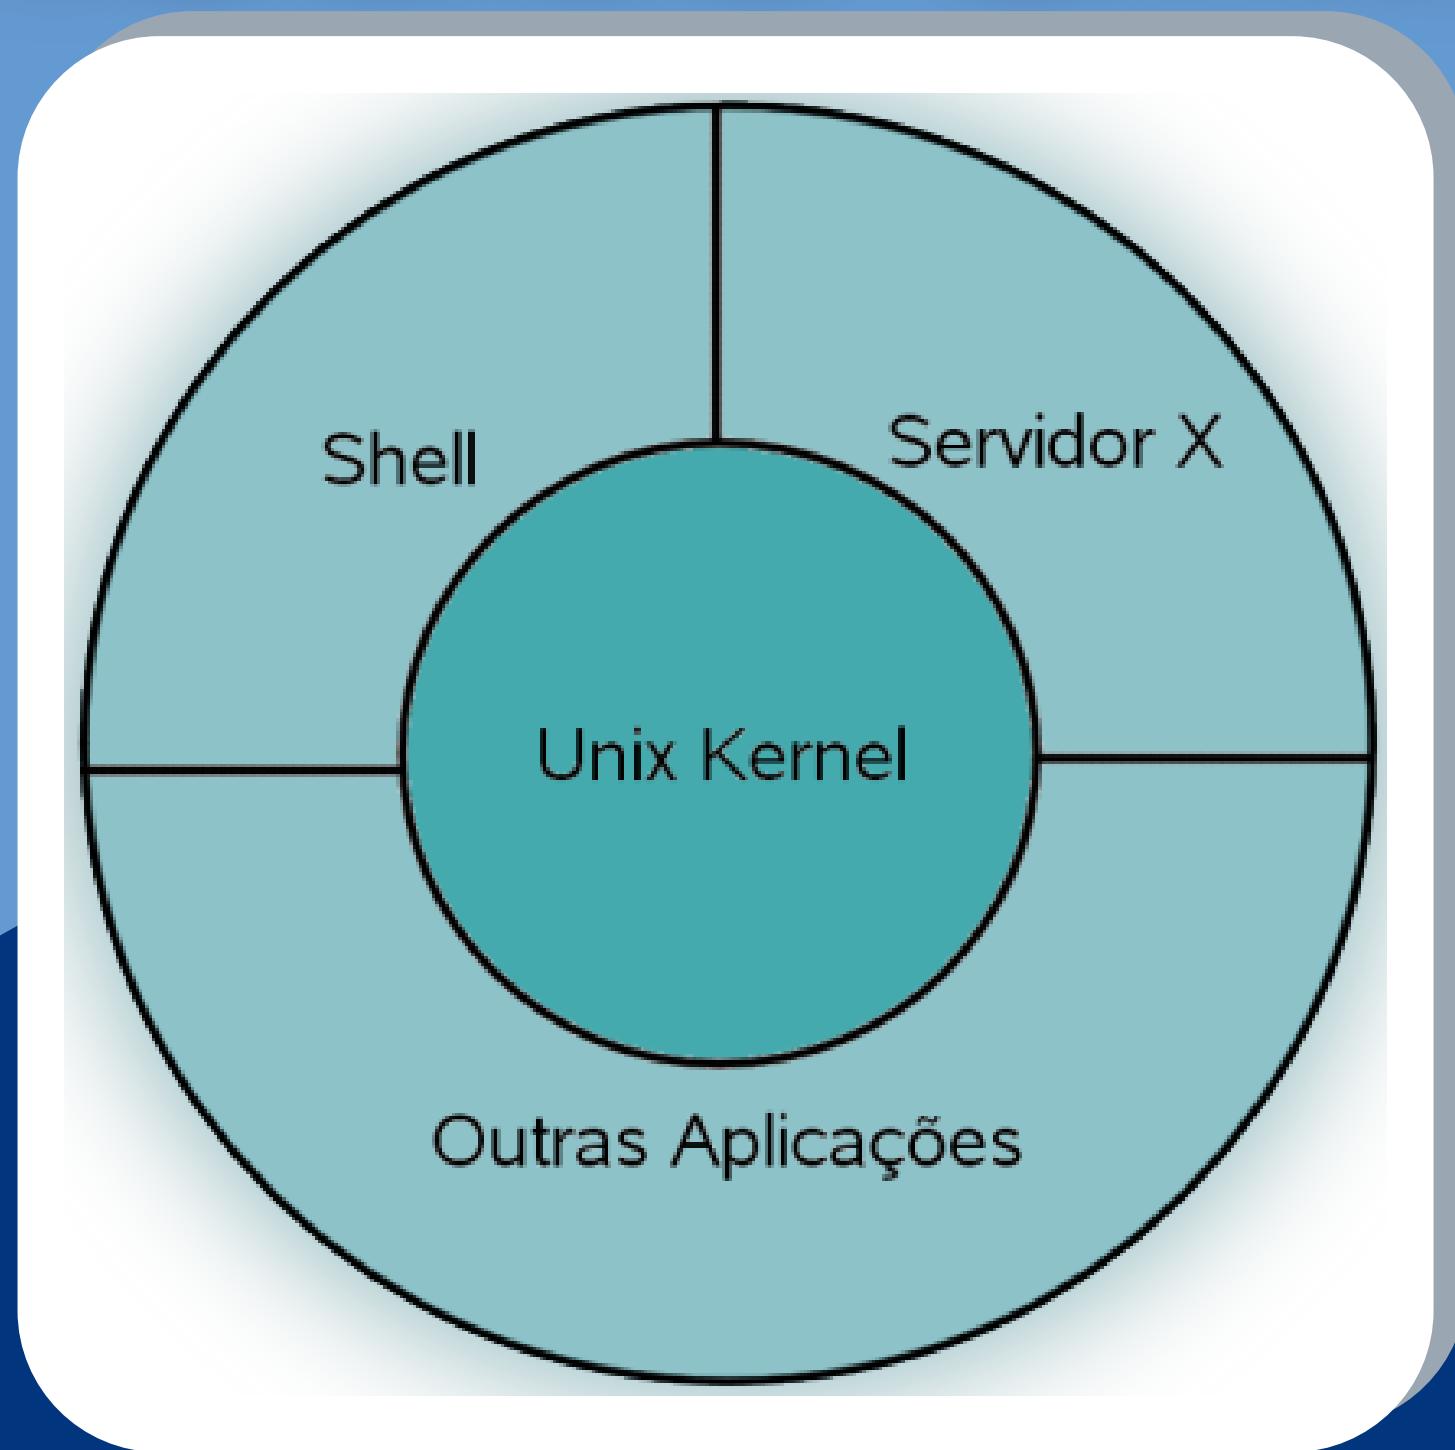


Aplicações

- Mozilla Firefox
- Adobe Systems
- Jogos

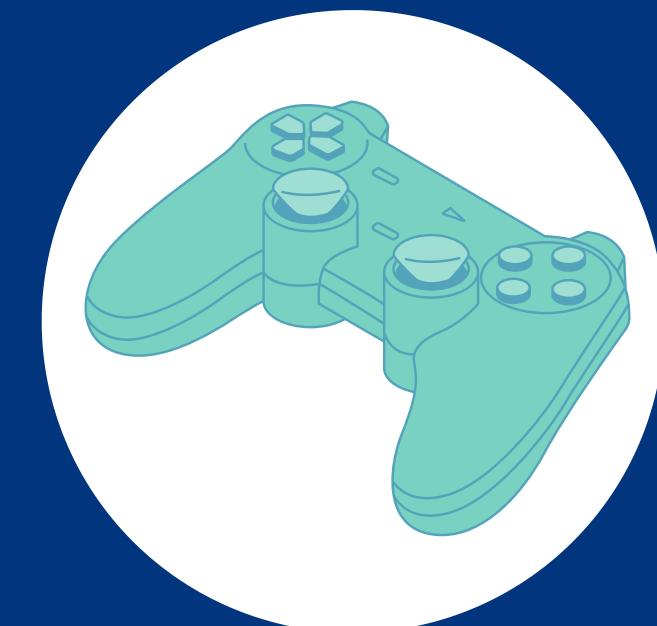

Popularidade

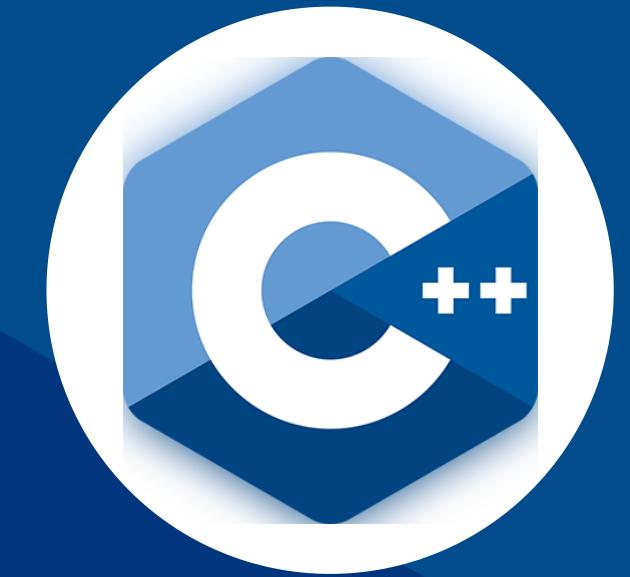

Mercado de Trabalho

2.454
Vagas



33.437
Vagas



65.343
Vagas




Exemplo de Código

main.cpp

```
1 #include <iostream>
2 using namespace std;
3
4 int main(){
5     cout << "Hello World!" << endl;
6 }
```



Calculadora

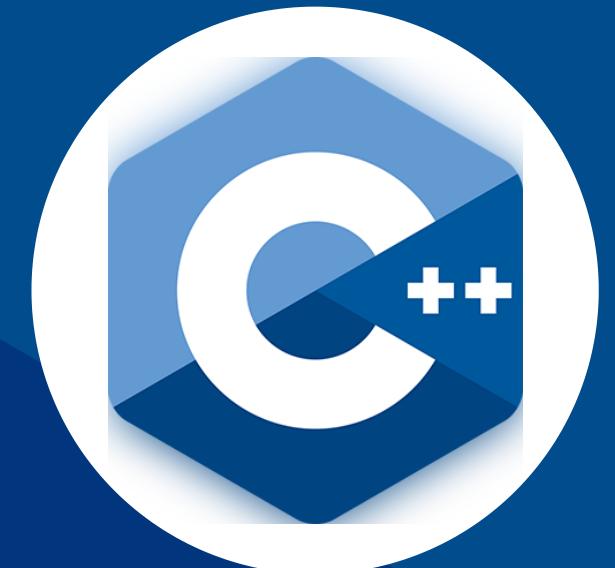

THANK
YOU

