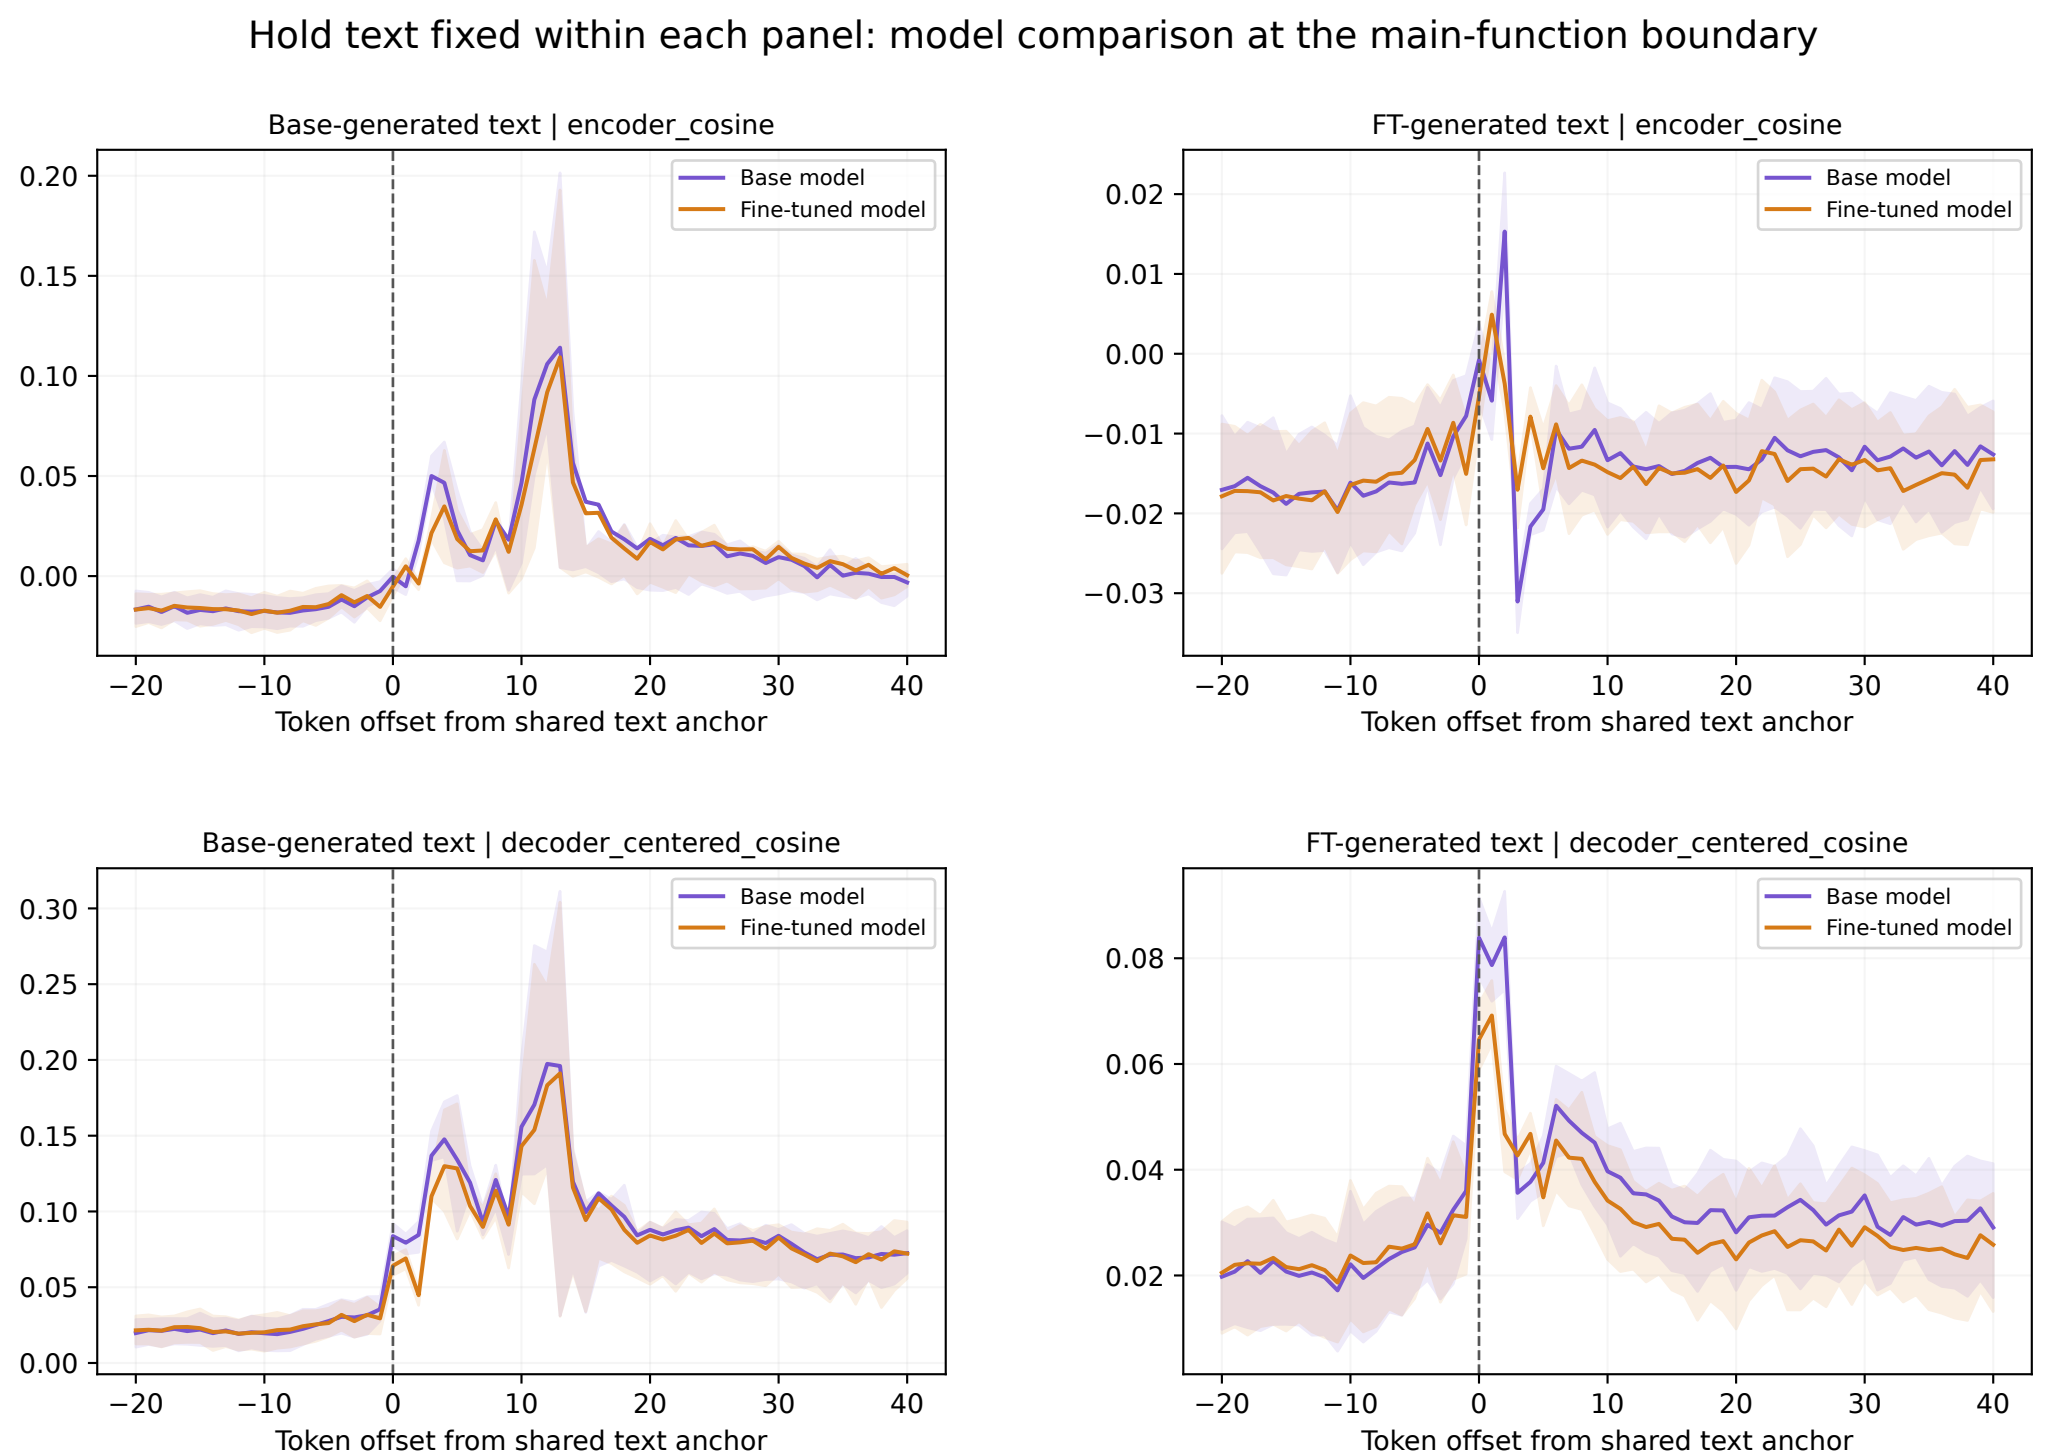
Hold text fixed within each panel: model comparison at the main-function boundary
Base-generated text | encoder_cosine
FT-generated text | encoder_cosine
Base-generated text | decoder_centered_cosine
FT-generated text | decoder_centered_cosine
Base model
Fine-tuned model
Token offset from shared text anchor
Anchor: newline ending first task_func definition. Left/right use DIFFERENT source texts; within each panel token IDs are identical.
Normalized similarities are descriptive, not calibrated model-specific latent activations or causal mediation.