


ZZNome : Lucas Medeiros dos Santos


Ra : 325212335

EXERCÍCIO 1


1-

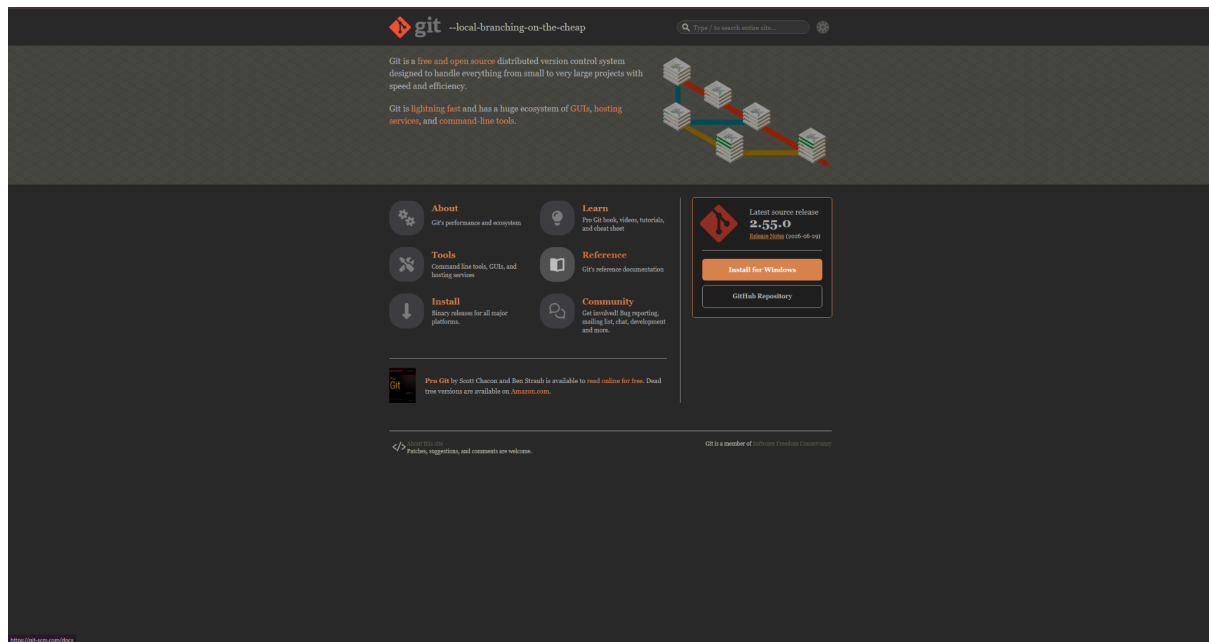


2-

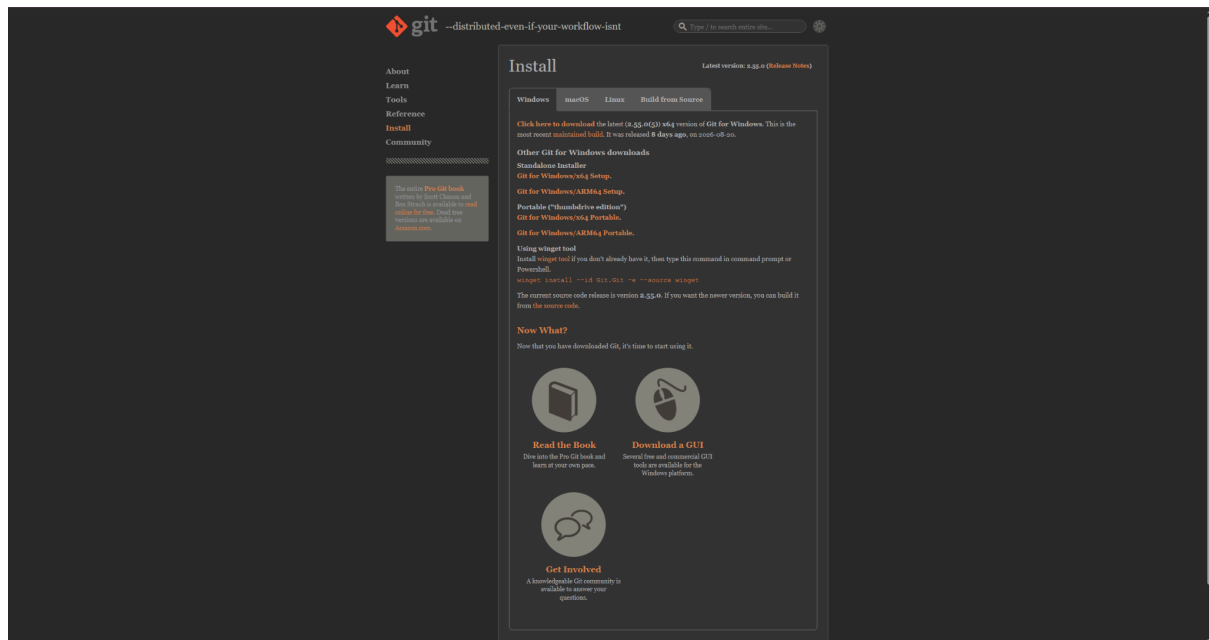


3-



4-

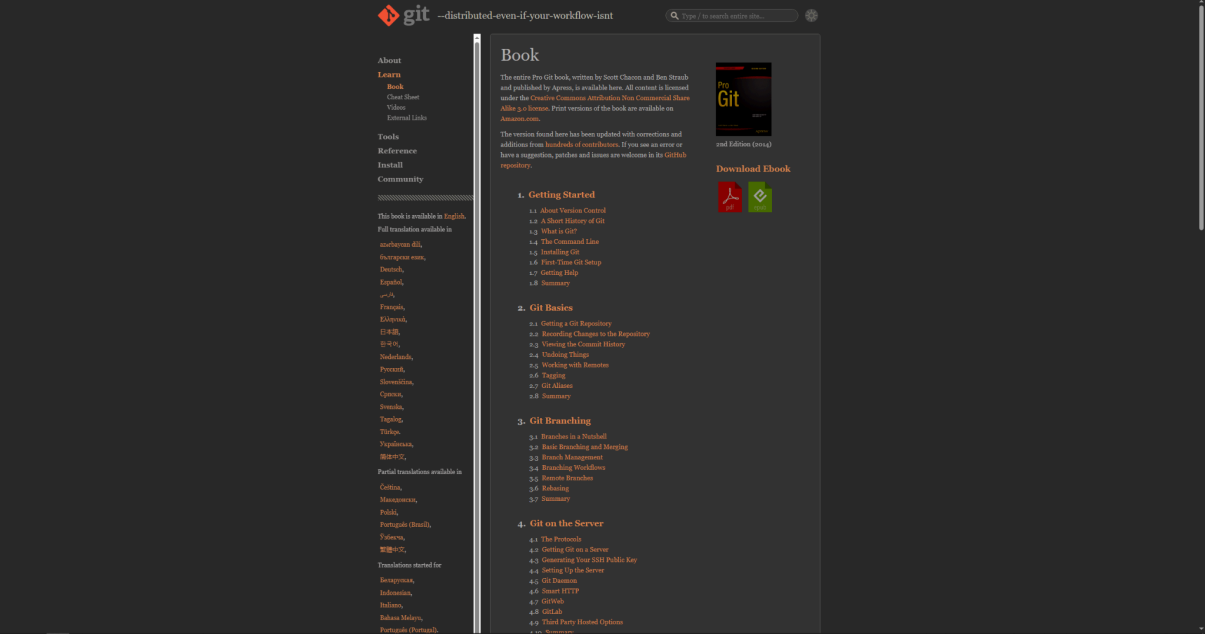

5-

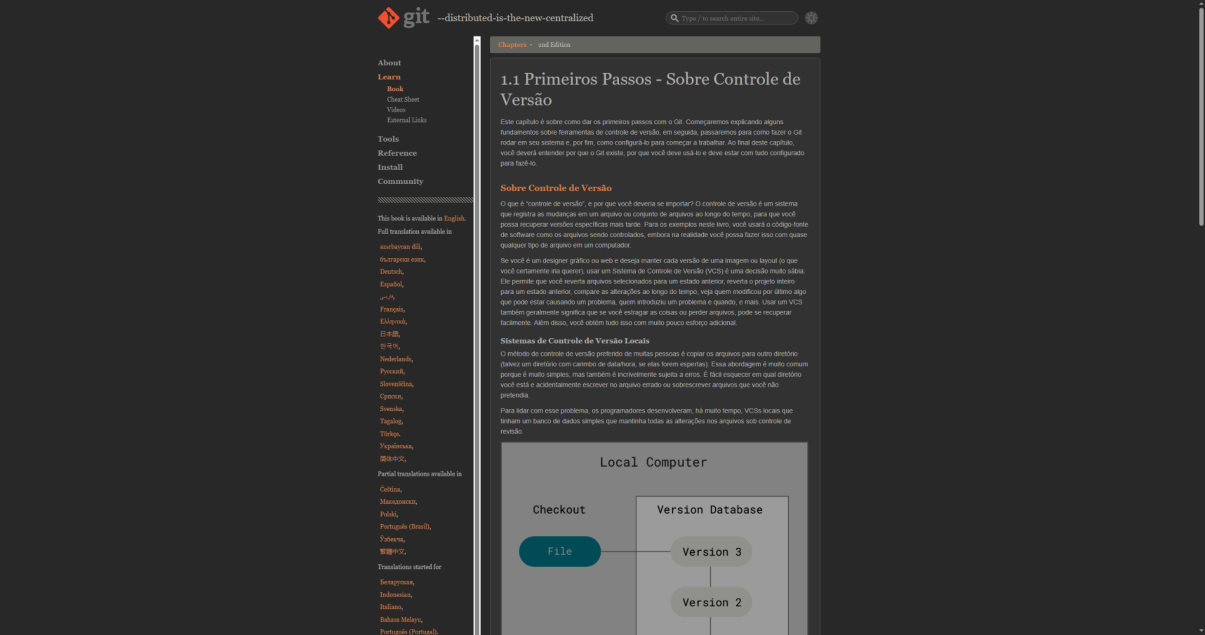

6-

Udemy Explorer Inscreva-se Pesquisar por qualquer coisa

Udemy Business Enrole na Udemy Fazer login Inscreva-se

Git e Github para iniciantes

Tudo que você precisa para começar a versionar seus arquivos e contribuir com a comunidade opensource.

4,6 ★★★★★ (88.390 avaliações) 118.370 alunos

Criado por [Willian Jofre de Vasconcelos](#)

Última atualização em 07/2020 Portugal

O que você aprenderá

- ✓ Saber a história do Git
- ✓ Como configurar o Git e seus comandos básicos
- ✓ Como trabalhar com diferentes branches num projeto
- ✓ Como trabalhar com repositórios remotos no Github

Explorar temas relacionados

[Github](#) [Git](#) [Mais opções em TI e software](#) [TI e software](#)

Conteúdo do curso

6 seções • 30 aulas • Duração total: 2h 5m [Expandir todas as seções](#)

Seção	Aulas	Duração
Entendendo o que é Git e Github	4 aulas	15 min
Introdução	1 aula	2:12
Controle de Versão	1 aula	5:57
História do Git	1 aula	4:45
O que é o Github	1 aula	2:04
Configurando o Git	2 aulas	5 min
Essencial do Git	6 aulas	35 min
Repositórios Remotos	6 aulas	15 min
Ramificação (Branch)	6 aulas	31 min

EXERCÍCIO 2 -

1-

```

PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS

PS C:\Users\Lucas> git --version
git version 2.53.0.windows.3
PS C:\Users\Lucas>

```

2-

```

PS C:\Users\Lucas> git config --global user.name "Lucas Medeiros Dos Santos"
>> git config --global user.email "lucasmedeirosdosantoss@gmail.com"
>> git config --global core.editor notepad

```

3-


```

Lucas Medeiros Dos Santos
lucasmedeirosdosantoss@gmail.com
notepad
diff.astextplain.textconv=astextplain
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
http.sslbackend=schannel
core.autocrlf=true
core.fscache=true
core.symlinks=false
pull.rebase=false
credential.helper=manager
credential.https://dev.azure.com.usehttppath=true
init.defaultbranch=master
gui.recentrepo=C:/Users/Lucas/OneDrive/Desktop/CCCC
user.name=Lucas Medeiros Dos Santos
user.email=lucasmedeirosdosantoss@gmail.com
core.editor=notepad
PS C:\Users\Lucas>

```


EXERCÍCIO 3 -

1-

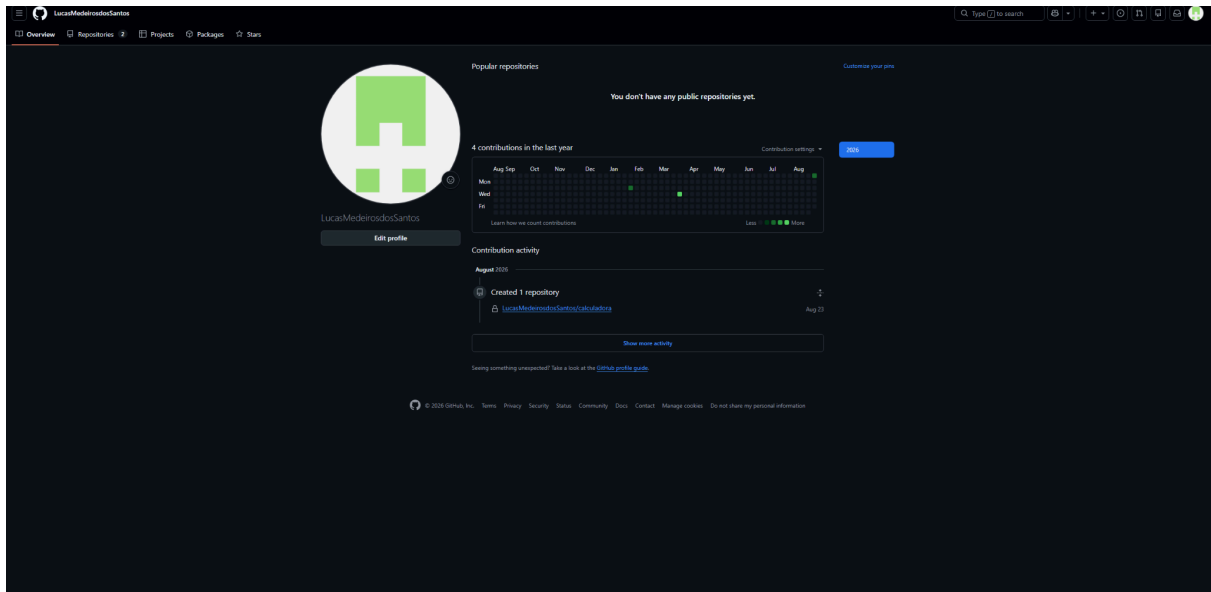


EXERCÍCIO 1 SLIDE 2 -


1-

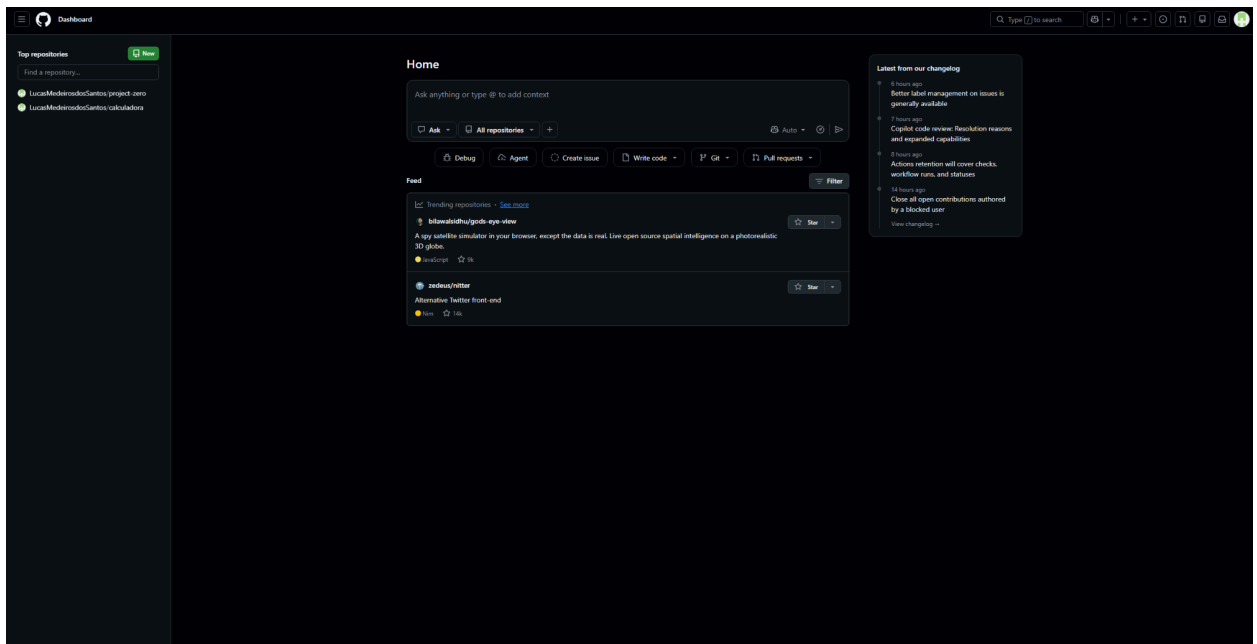


2-

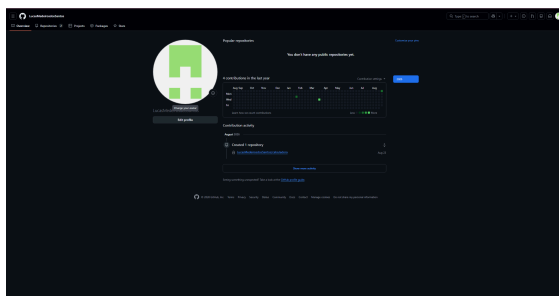

3-

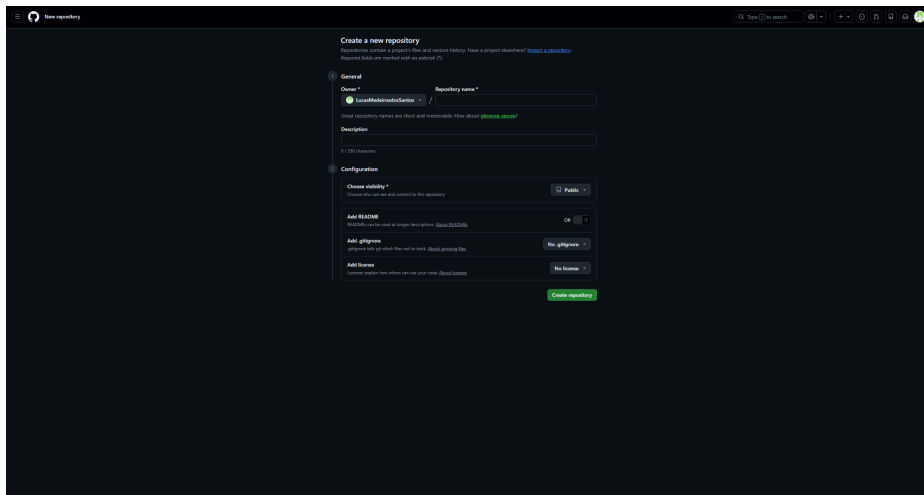


4-

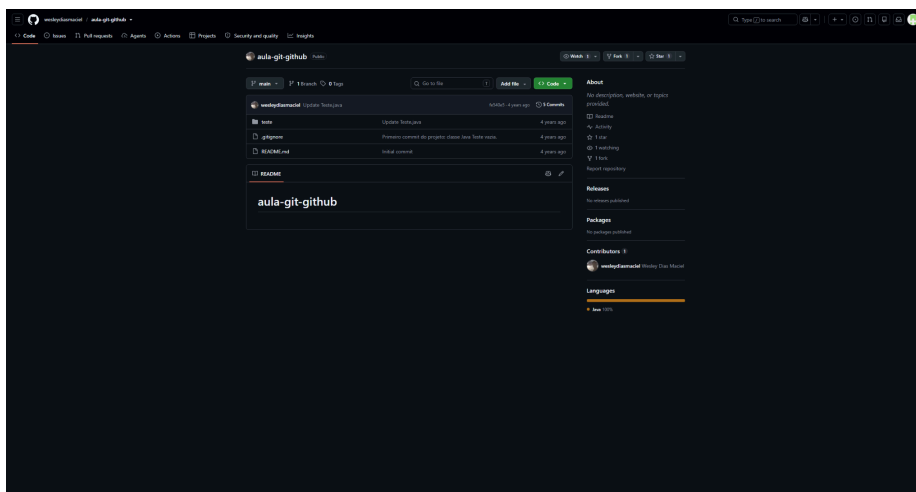

EXERCÍCIO 2 -

1-

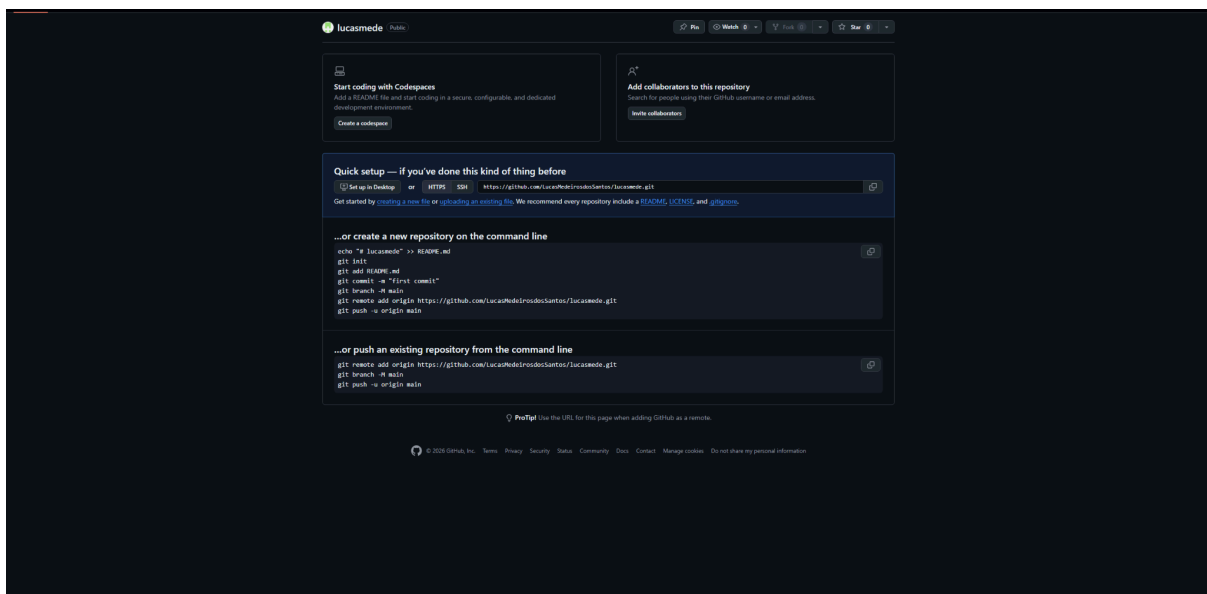

2-

```
PS C:\Users\Lucas> git clone https://github.com/LucasMedeirosdosSantos/lucasmede.git
Cloning into 'lucasmede'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.
```


3,4,5-

```
PS C:\Windows\system32> cd lucasmede
PS C:\Windows\system32\lucasmede> git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
PS C:\Windows\system32\lucasmede>
```

EXERCÍCIO 3-

1-

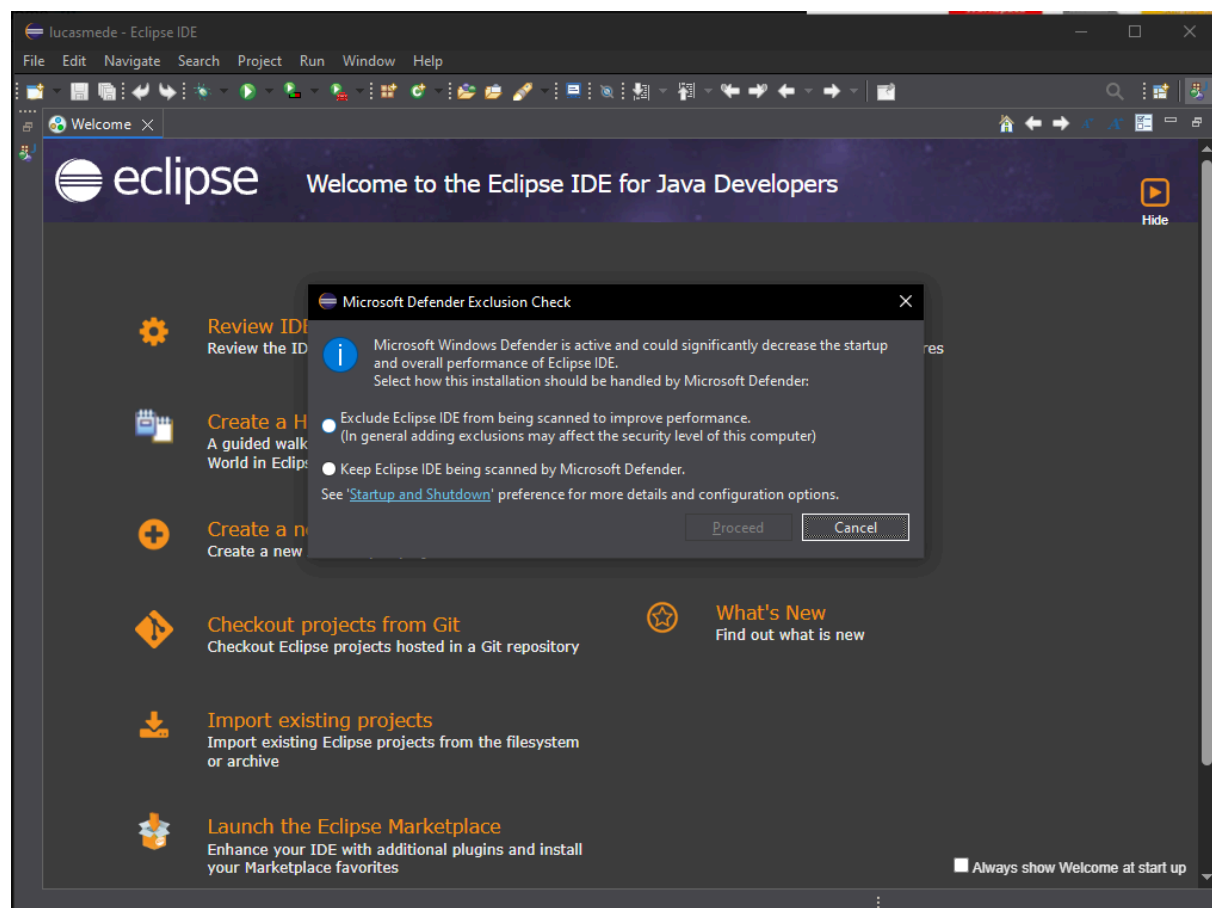

2-

New Java Project

Create a Java Project

Create a Java project in the workspace or in an external location.

Project name:

teste

☒ Use default location

Location: C:\Users\Lucas\lucasmde\teste

Browse...

JRE

☐ Use an execution environment JRE: JavaSE-21

☐ Use a project specific JRE: jdk-21.0.8

☐ Use default JRE 'jdk-21.0.8' and workspace compiler preferences

[Configure JREs...](#)

Project layout

☐ Use project folder as root for sources and class files

☐ Create separate folders for sources and class files

[Configure default...](#)

Working sets

☒ Add project to working sets

Working sets:

New...

Select...

Module

☒ Create module-info.java file

Module name:

☒ Generate comments

module name will be "teste" (if no module is specified, then project name will be used as module name)

?

< Back

Next >

Finish

Cancel

New Java Project

Create a Java Project

 / is an invalid character in resource name 'teste/src'.

Project name:

☒ Use default location

Location:

JRE

☐ Use an execution environment JRE: 

☐ Use a project specific JRE: 

☐ Use default JRE 'jdk-21.0.8' and workspace compiler preferences [Configure JREs...](#)

Project layout

☐ Use project folder as root for sources and class files

☐ Create separate folders for sources and class files [Configure default...](#)

Working sets

☐ Add project to working sets

Working sets: 

Module

☒ Create module-info.java file

Module name:

☒ Generate comments

module name will be "teste/src" (if no module is specified, then project name will be used as module name)



4-

```
PS C:\Windows\system32> cd lucasmade
PS C:\Windows\system32\lucasmade> git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
```

5-

```
@LucasMedeirosdosSantos →/workspaces/lucasmade (main) $ git add .
```

6-

```

lucas@DESKTOP-OMOM23C MINGW64 ~/lucamede (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   .gitignore
    new file:   teste/.classpath
    new file:   teste/.gitignore
    new file:   teste/.project
    new file:   teste/.settings/org.eclipse.core.resources.prefs
    new file:   teste/.settings/org.eclipse.jdt.core.prefs
    new file:   teste/src/module-info.java

```

7-

```

lucas@DESKTOP-OMOM23C MINGW64 ~/lucamede (main)
$ git commit -m "Primer commit do projeto:classe Java Teste vazia"
main 0a88083] Primer commit do projeto:classe Java Teste vazia
7 files changed, 50 insertions(+)
create mode 100644 .gitignore
create mode 100644 teste/.classpath
create mode 100644 teste/.gitignore
create mode 100644 teste/.project
create mode 100644 teste/.settings/org.eclipse.core.resources.prefs
create mode 100644 teste/.settings/org.eclipse.jdt.core.prefs
create mode 100644 teste/src/module-info.java

```

8-

```

lucas@DESKTOP-OMOM23C MINGW64 ~/lucamede (main)
$ git push
info: please complete authentication in your browser...
Enumerating objects: 13, done.
Counting objects: 100% (13/13), done.
Delta compression using up to 12 threads
Compressing objects: 100% (8/8), done.
Writing objects: 100% (12/12), 1.40 KiB | 479.00 KiB/s, done.
Total 12 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/LucasMedeirosdosSantos/lucamede.git
6ea21b4..0a88083  main -> main

```


9-

```

lucas@DESKTOP-OMOM23C MINGW64 ~/lucamede (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.


```

10-

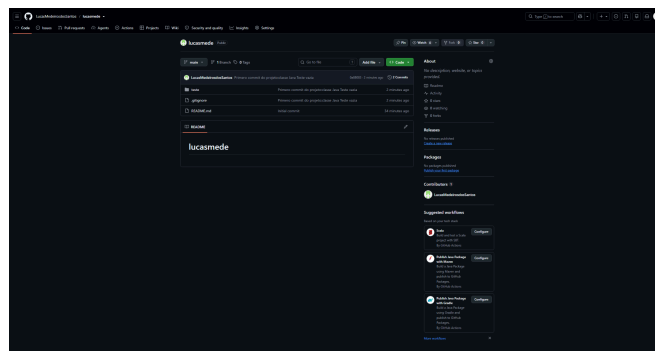

EXERCÍCIO 4 -


1-

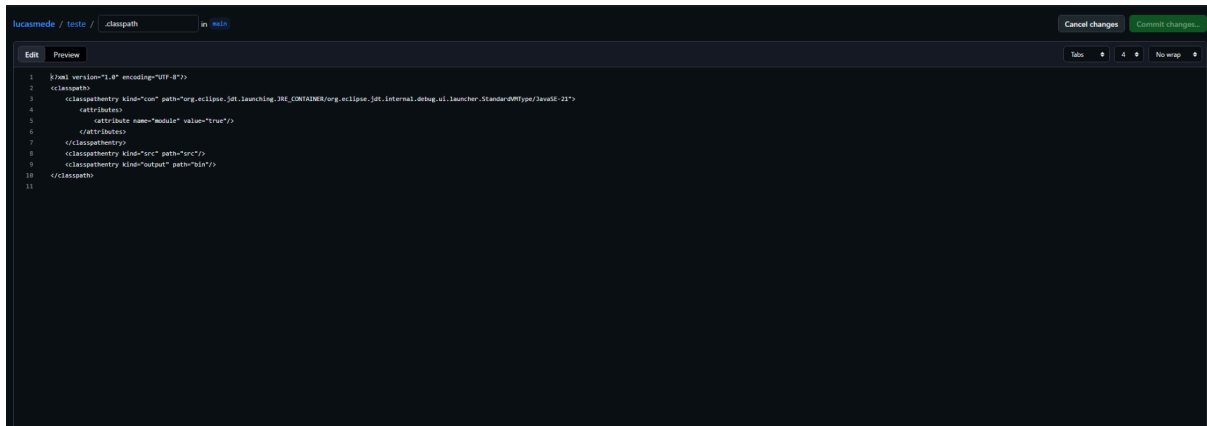

The screenshot shows an IDE window with a file named `classpath` in the `teste` directory. The file contains XML configuration for the Java classpath. The code is as follows:

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <classpath>
3   <classpathentry kind="con" path="org.eclipse.jdt.launching.JRE_CONTAINER/org.eclipse.jdt.internal.debug.ui.launcher.StandardJRE11" />
4   <attributes>
5     <attribute name="module" value="true"/>
6   </attributes>
7 </classpathentry>
8 <classpathentry kind="src" path="src"/>
9 <classpathentry kind="output" path="bin"/>
10 </classpath>
```

2-

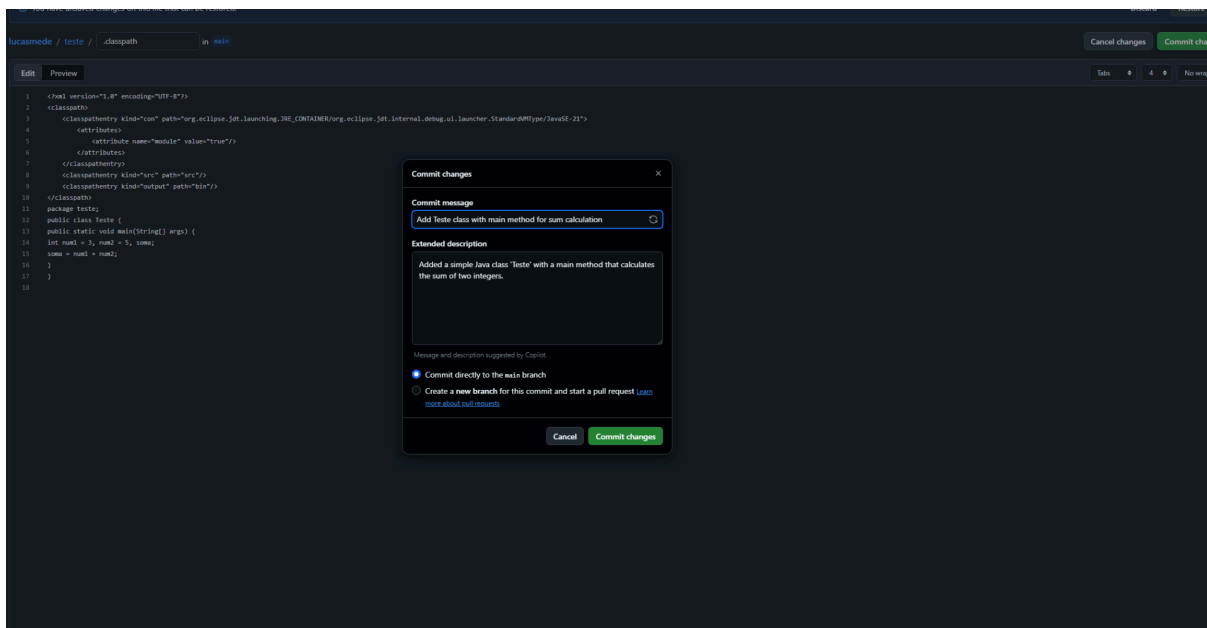

The screenshot shows the same IDE window as before, but with a `Commit changes` dialog box open. The dialog box has the following content:

Commit changes

Commit message

Add Teste class with main method for sum calculation

Extended description

Added a simple Java class 'Teste' with a main method that calculates the sum of two integers.

Message and description suggested by Copilot.

☒ Commit directly to the main branch

☐ Create a new branch for this commit and start a pull request [Learn more about pull requests](#)

Cancel **Commit changes**

3-

```
$ git fetch
remote: Enumerating objects: 7, done.
remote: Counting objects: 100% (7/7), done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 4 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (4/4), 1.17 KiB | 74.00 KiB/s, done.
From https://github.com/LucasMedeirosdosSantos/lucasmede
0a88083..5886c76 main -> origin/main
```

4,5-

```
Lucas@DESKTOP-0MOM23C MINGW64 ~/lucasmede (main)
$ git fetch
remote: Enumerating objects: 7, done.
remote: Counting objects: 100% (7/7), done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 4 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (4/4), 1.17 KiB | 74.00 KiB/s, done.
From https://github.com/LucasMedeirosdosSantos/lucasmede
```

6,7,8-

```
lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmade (main)
git pull
Updating 0a88083..5886c76
Fast-forward
 teste/.classpath | 7 ++++++
 1 file changed, 7 insertions(+)
```

EXERCÍCIO 5-

1-

```
1  <?xml version="1.0" encoding="UTF-8"?>
2  <classpath>
3      <classpathentry kind="con" path="org.eclipse.jdt.launching.JRE_CONTAINER/org.eclipse.jdt.internal.debug.ui.launcher.Sta
4      <attributes>
5          <attribute name="module" value="true"/>
6      </attributes>
7  </classpathentry>
8  <classpathentry kind="src" path="src"/>
9  <classpathentry kind="output" path="bin"/>
10 </classpath>
11 package teste;
12 public class Teste {
13     public static void main(String[] args) {
14         int num1 = 3, num2 = 5, soma;
15         soma = num1 + num2;
16         System.out.println(soma);
17     }
18 }
19
```

2-

```
remote: Enumerating objects: 17, done.
remote: Counting objects: 100% (17/17), done.
remote: Compressing objects: 100% (12/12), done.
remote: Total 16 (delta 3), reused 9 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (16/16), 2.46 KiB | 504.00 KiB/s, done.
From https://github.com/LucasMedeirosdosSantos/lucasmade
   6ea21b4..5886c76  main    -> origin/main
Updating 6ea21b4..5886c76
Fast-forward
 .gitignore           | 1 +
 teste/.classpath     | 17 ++++++
 teste/.gitignore     | 1 +
 teste/.project       | 17 ++++++
 teste/.settings/org.eclipse.core.resources.prefs | 2 ++
 teste/.settings/org.eclipse.jdt.core.prefs       | 11 ++++++
 teste/src/module-info.java | 8 ++++++
 7 files changed, 57 insertions(+)
create mode 100644 .gitignore
create mode 100644 teste/.classpath
```

3-

```
code  Blame  10 lines (10 loc) - 543 Bytes
1  <?xml version="1.0" encoding="UTF-8"?>
2  <classpath>
3    <classpathentry kind="con" path="org.eclipse.jdt.launching.JRE_CONTAINER/org.eclipse.jdt.internal.debug.ui.launcher.StandardVMType/JavaSE-21">
4      <attributes>
5        <attribute name="module" value="true"/>
6      </attributes>
7    </classpathentry>
8    <classpathentry kind="src" path="src"/>
9    <classpathentry kind="output" path="bin"/>
10 </classpath>
11 package teste;
12 public class Teste {
13   public static void main(String[] args) {
14     int num1 = 3, num2 = 5, soma;
15     soma = num1 + num2;
16     System.out.println(soma);
17   }
18 }
```

4-

```
@LucasMedeirosdosSantos →/workspaces/lucasmede (main) $ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
```

```

MINGW64:/c/Users/Lucas/lucasmede
Lucas@DESKTOP-OMOM23C MINGW64 ~
$ git clone https://github.com/LucasMedeirosdosSantos/lucasmede/tree/main
Cloning into 'main'...
fatal: protocol 'https' is not supported

Lucas@DESKTOP-OMOM23C MINGW64 ~
$ cd lucasmede

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ touch lucasmede.java

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ ll
total 5
-rw-r--r-- 1 Lucas 197121 11 Aug 28 03:34 README.md
-rw-r--r-- 1 Lucas 197121 0 Aug 31 00:15 lucasmede.java
drwxr-xr-x 1 Lucas 197121 0 Aug 28 04:15 teste/

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ git add lucasmede.java

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ git commit -m "Adicionando Arquivo Java"
[main e2f7776] Adicionando Arquivo Java
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 lucasmede.java

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ git push
To https://github.com/LucasMedeirosdosSantos/lucasmede.git
! [rejected] main -> main (fetch first)
error: failed to push some refs to 'https://github.com/LucasMedeirosdosSantos/lucasmede.git'
hint: Updates were rejected because the remote contains work that you do not
hint: have locally. This is usually caused by another repository pushing to
hint: the same ref. If you want to integrate the remote changes, use
hint: 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ AC

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ git pull
remote: Enumerating objects: 10, done.
remote: Counting objects: 100% (10/10), done.
remote: Compressing objects: 100% (7/7), done.
remote: Total 7 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (7/7), 2.04 MiB | 10.83 MiB/s, done.
From https://github.com/LucasMedeirosdosSantos/lucasmede
 5886c76..bb3433c main -> origin/main
hint: Waiting for your editor to close the file... unix2dos: converting file C:/Users/Lucas/lucasmede/.git/MERGE_MSG to DOS format...
dos2unix: converting file C:/Users/Lucas/lucasmede/.git/MERGE_MSG to Unix format...
Merge made by the 'ort' strategy.
 "EXERC\303\215CIOS REINALDO.pdf" | Bin 0 -> 2486095 bytes
 teste/.classpath | 1 +
 2 files changed, 1 insertion(+)
 create mode 100644 "EXERC\303\215CIOS REINALDO.pdf"
gigigi

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ git push
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 12 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (5/5), 589 bytes | 589.00 KiB/s, done.
Total 5 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 1 local object.
To https://github.com/LucasMedeirosdosSantos/lucasmede.git
 bb3433c..1fd15de main -> main

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ git pull
remote: Enumerating objects: 11, done.
remote: Counting objects: 100% (11/11), done.
remote: Compressing objects: 100% (7/7), done.
remote: Total 7 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (7/7), 2.02 KiB | 103.00 KiB/s, done.
From https://github.com/LucasMedeirosdosSantos/lucasmede
 1fd15de..0cd8284 main -> origin/main
Updating 1fd15de..0cd8284
Fast-forward
 lucasmede.java | 8 ++++++++
 teste/.classpath | 8 -----
 2 files changed, 8 insertions(+), 8 deletions(-)

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

Lucas@DESKTOP-OMOM23C MINGW64 ~/lucasmede (main)
$ |

```



LucasMedeirosdosSantos Update lucasmede.java

Code

Blame

8 lines (8 loc) · 165 Bytes

```
1  package teste;
2  ✓ public class Teste {
3  ✓ public static void main(String[] args) {
4    int num1 = 3, num2 = 5, soma;
5    soma = num1 + num2;
6    System.out.println(soma);
7  }
8  }
```