

October 27–30, 2014: CNIT La Défense, Paris, France

ICIP 2014
PARIS
IEEE International Conference on Image Processing



IEEE

Signal Processing Society



Temporal Depth Video Enhancement Based On Intrinsic Static Structure



Lu Sheng, King Ngi Ngan & Songnan Li
The Chinese University of Hong Kong

Outline

2


- Introduction & Related Work
- Intrinsic Static Structure
- Temporal Depth Video Enhancement
- Experimental Results
- Conclusion & Future Work

Introduction

3

- In a raw depth video capturing a natural scene
 - ▣ Various complex and even unpredictable dynamic contents
 - ▣ As well as spatial and temporal artifacts
- Artifacts in the depth video
 - ▣ Both in Spatial and temporal domain
 - ▣ Errors are caused by
 - Low resolution
 - Noise & outliers
 - Occlusions, material absorption & reflection
 - Distortion around object boundaries, and etc.

Raw Kinect video

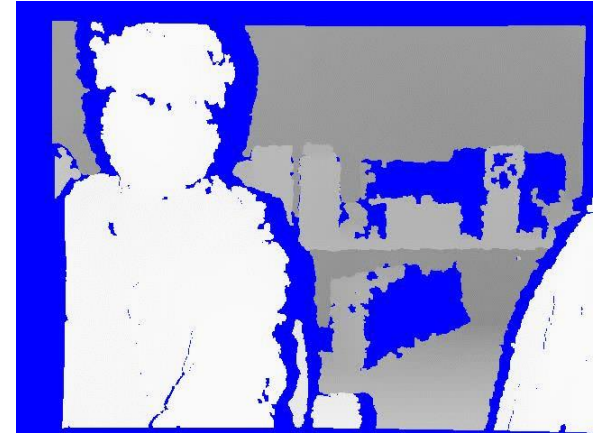

Color-coded Raw TOF video



Introduction


4

- After the spatial enhancement
 - ▣ Reduce artifacts in spatial domain
 - ▣ But not enough to deal with *temporal flickering*
 - No temporal consistency
 - Aggravate flickering artifacts

Raw Kinect video



Spatial JBF [1]

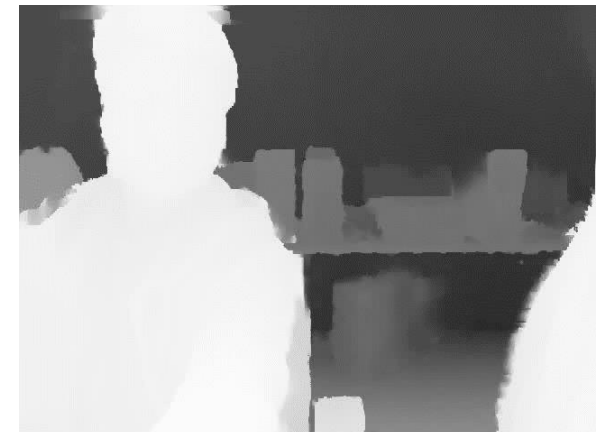

Introduction

5

- After the spatial enhancement
 - ▣ Reduce artifacts in spatial domain
 - ▣ But not enough to deal with *temporal flickering*
 - No temporal consistency
 - Aggravate flickering artifacts
- After a conventional spatiotemporal enhancement
 - ▣ Still contain temporal flickering
 - ▣ Distort the necessary depth variation along dynamic objects
- How to eliminate the temporal flickering while do not distort the necessary depth variation along the dynamic objects?

Spatial JBF



Coherent spatiotemporal JBF [2]



Related Work

6

□ Spatial Enhancement

▣ Global optimization

- J. Diebel *et al.*, NIPS 2006
- J. Yang *et al.*, ECCV 2012
- J. Park *et al.*, ICCV 2011
- and etc.

▣ High dimensional Filtering

- J. Kopf *et al.*, TOG 2007
- J. Dolson *et al.*, CVPR 2010
- B. Huhle *et al.*, CVIU 2010
- and etc.

▣ Patch Match and etc.

- J. Lu *et al.*, CVPR 2013
- L. Sheng *et al.*, ICIP 2013, and etc.

□ Temporal Enhancement

▣ Median filter

- S. Matyunin *et al.*, WSCG 2011

▣ TV – ℓ_1 norm

- S. H. Chan *et al.*, TIP 2011

▣ Texture consistency

- Dongbo Min *et al.*, TIP 2012
- Deliang Fu *et al.*, PCS 2010

▣ Both texture and depth

- N. A. Dodgson *et al.*, CGF 2012


▣ Model the scene

- J. Shen *et al.*, TIP 2013
- J. Shen *et al.*, CVPR 2013




Intrinsic Static Structure

7

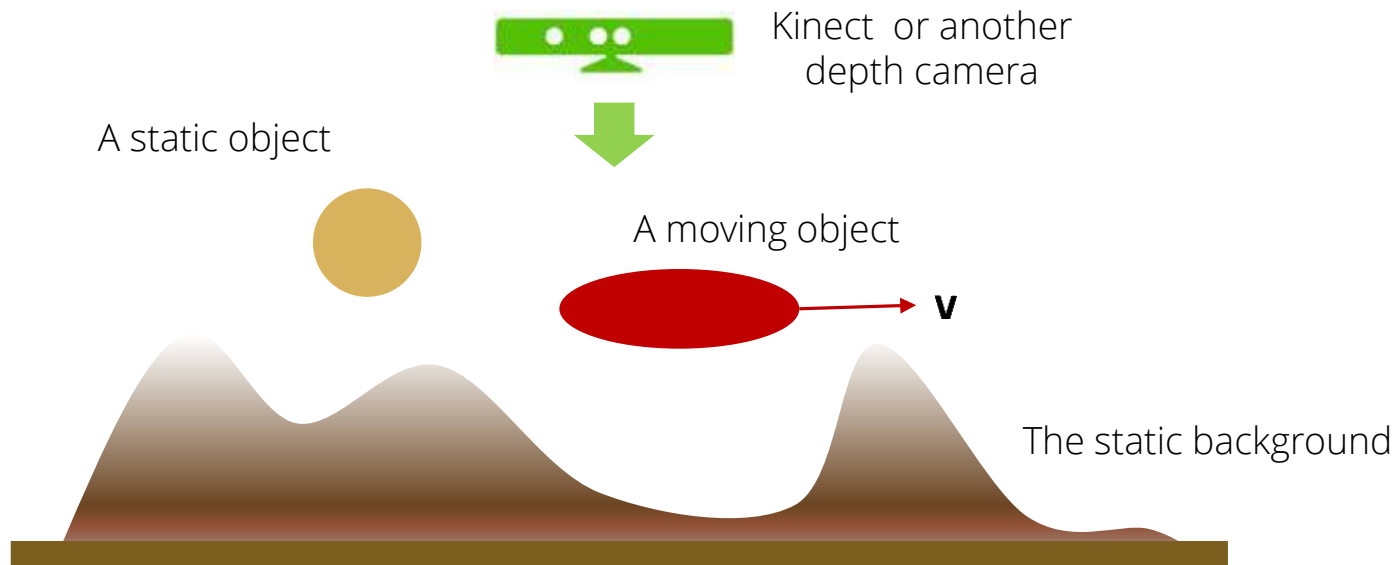

Intrinsic Static Structure

8

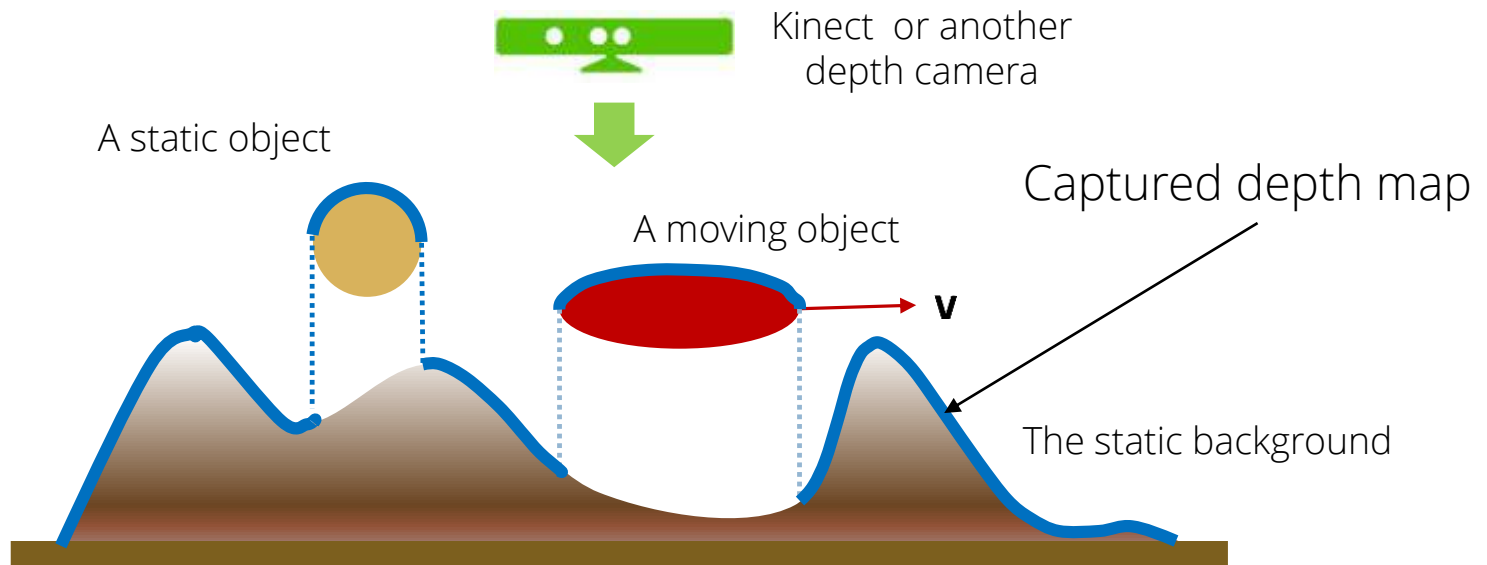


Intrinsic Static Structure

9

□ Definition

- A manifold lies on or behind the input depth map
- Contains static structure of the captured scene

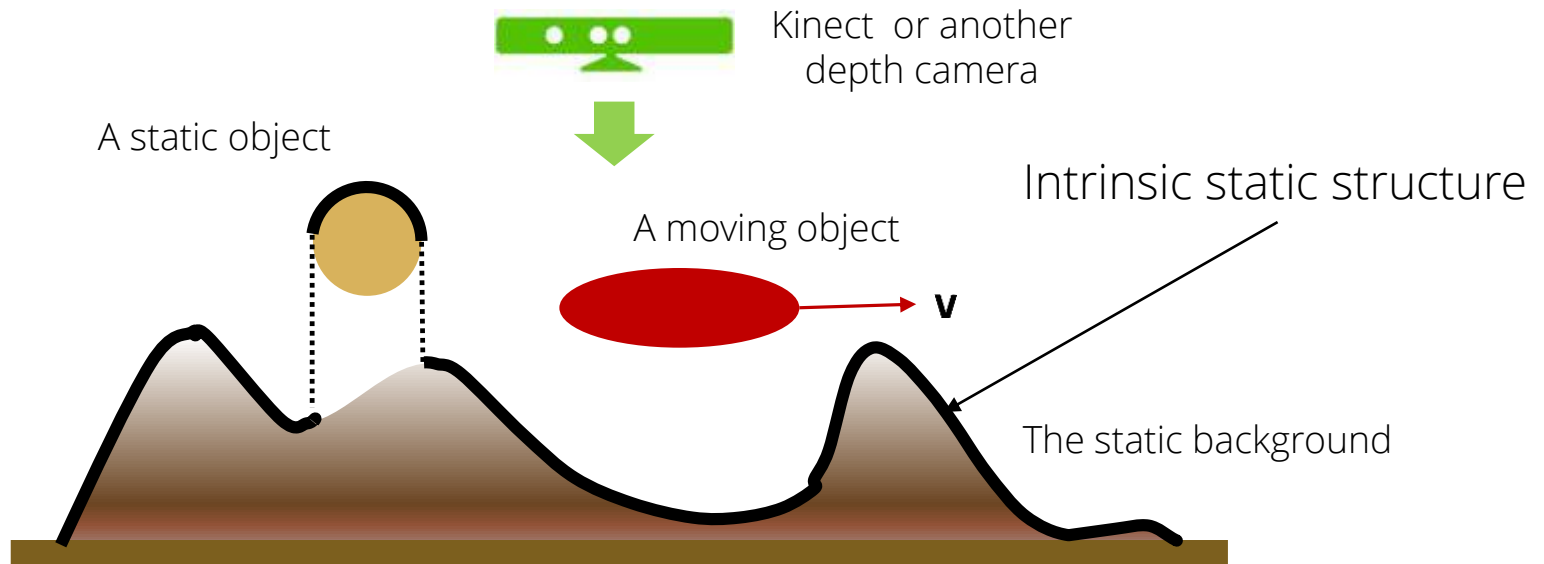


Intrinsic Static Structure

10

□ Observation

- ▣ Moving objects stay in its front
- ▣ Static regions or visible background area are fused into it

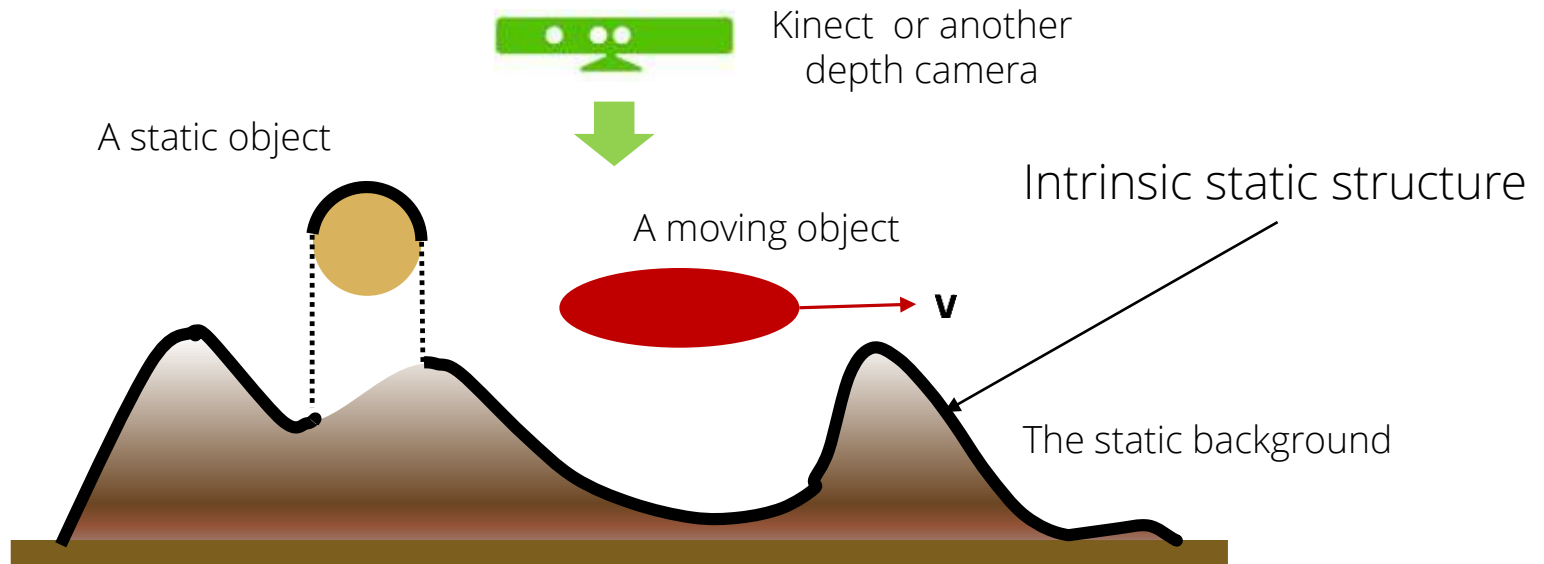

Intrinsic Static Structure

11

- How to estimate the intrinsic static structure under an on-line fashion?



- Temporal enhancement of the depth video?

- A probabilistic generative model
- An online variational probabilistic update scheme with
 - A robust exclusion of the dynamic foreground objects
 - the inclusion of the once occluded background

- Robust static region detection by the intrinsic static structure
- Enhance the static region of input depth frame
 - Dynamic objects own limited temporal consistency, we just omit it
 - Fusing the static region with the estimated intrinsic static structure

Intrinsic Static Structure

12

□ A Probabilistic Generative Model

If incoming depth d_x^t belongs to

- ▣ **State-I:** the intrinsic static structure


$$\mathcal{N}(d_x^t | Z_x, \tau_x^{-1})$$

- ▣ **State-II:** outliers in the front or moving objects

$$\mathcal{U}_f(d_x^t | Z_x) = U_f [d_x^t < Z_x]$$

- ▣ **State-III:** outliers rearward or revealed background

$$\mathcal{U}_b(d_x^t | Z_x) = U_b [d_x^t > Z_x]$$

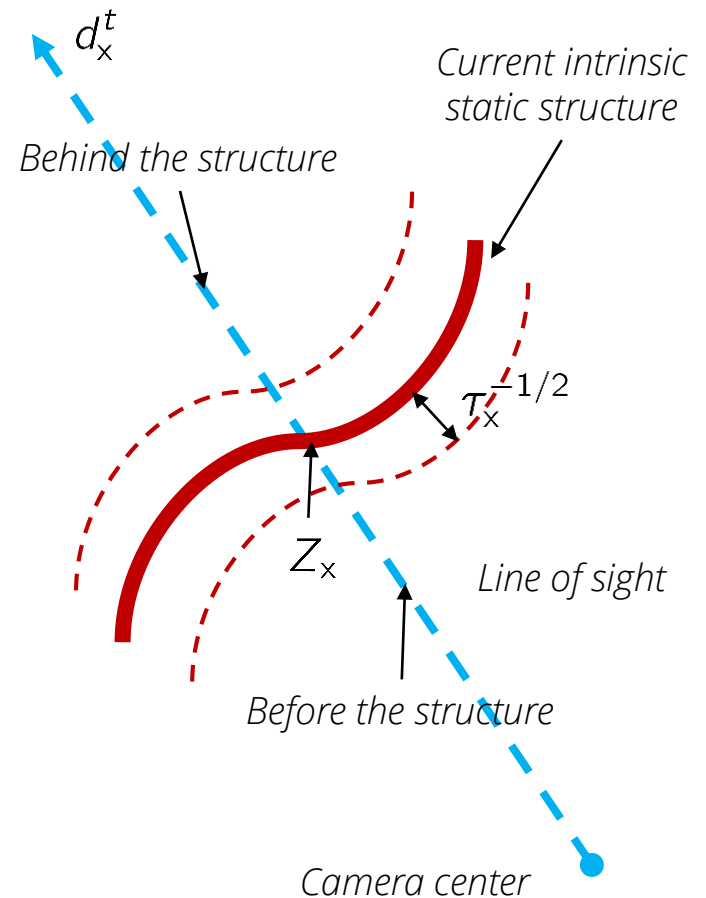

$[\cdot]$ is an indicate function that is equal to 1, when input argument is true and 0 vice visa

Intrinsic Static Structure

13

□ A Probabilistic Generative Model

If incoming depth d_x^t belongs to

- **State-I**: the intrinsic static structure


$$\mathcal{N}(d_x^t | Z_x, \tau_x^{-1})$$

- **State-II**: outliers in the front or moving objects

$$\mathcal{U}_f(d_x^t | Z_x) = U_f [d_x^t < Z_x]$$

- **State-III**: outliers rearward or revealed background

$$\mathcal{U}_b(d_x^t | Z_x) = U_b [d_x^t > Z_x]$$

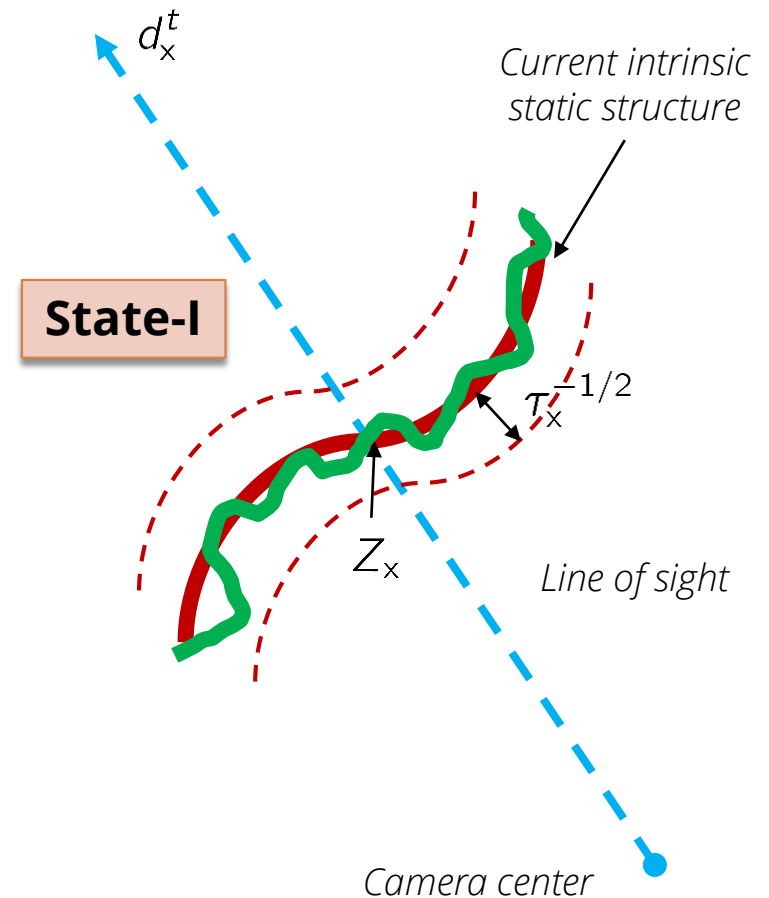

$[\cdot]$ is an indicate function that is equal to 1, when input argument is true and 0 vice visa

Intrinsic Static Structure

14

□ A Probabilistic Generative Model

If incoming depth d_x^t belongs to

- **State-I:** the intrinsic static structure


$$\mathcal{N}(d_x^t | Z_x, \tau_x^{-1})$$

- **State-II:** outliers in the front or moving objects

$$\mathcal{U}_f(d_x^t | Z_x) = U_f [d_x^t < Z_x]$$

- **State-III:** outliers rearward or revealed background

$$\mathcal{U}_b(d_x^t | Z_x) = U_b [d_x^t > Z_x]$$

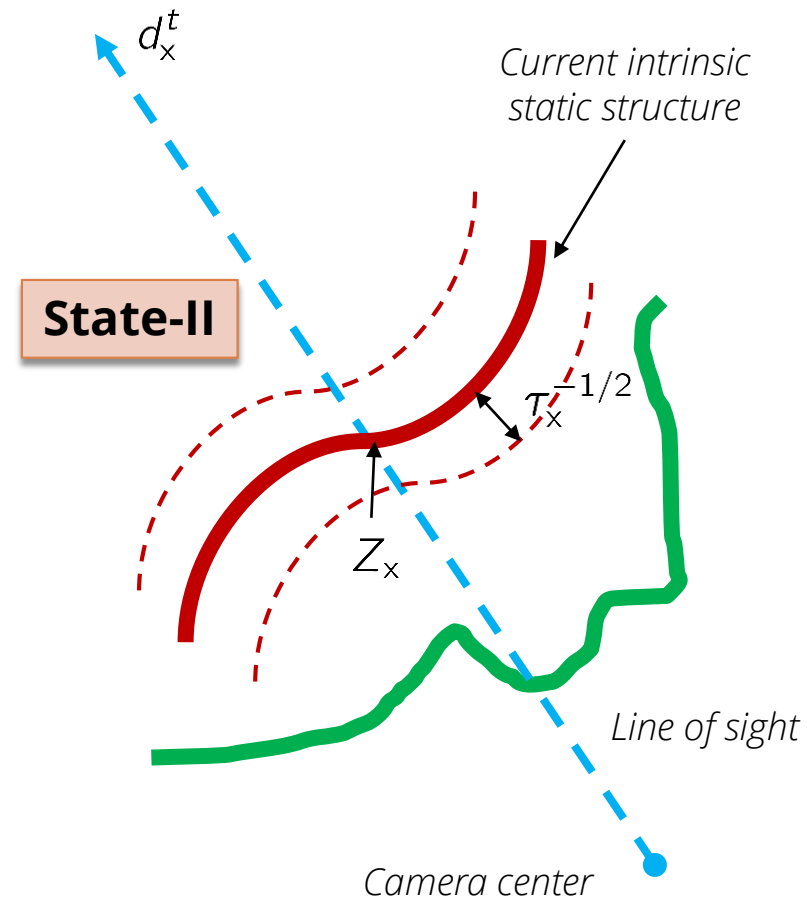

$[\cdot]$ is an indicate function that is equal to 1, when input argument is true and 0 vice visa

Intrinsic Static Structure

15

□ A Probabilistic Generative Model

If incoming depth d_x^t belongs to

- **State-I:** the intrinsic static structure


$$\mathcal{N}(d_x^t | Z_x, \tau_x^{-1})$$

- **State-II:** outliers in the front or moving objects

$$\mathcal{U}_f(d_x^t | Z_x) = U_f [d_x^t < Z_x]$$

- **State-III:** outliers rearward or revealed background

$$\mathcal{U}_b(d_x^t | Z_x) = U_b [d_x^t > Z_x]$$

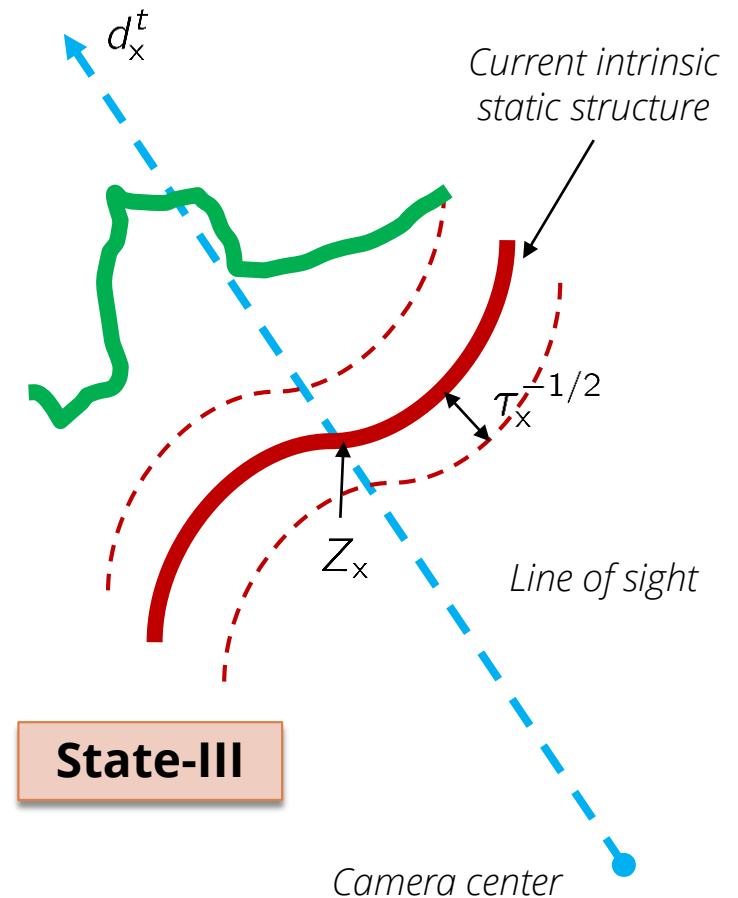

$[\cdot]$ is an indicate function that is equal to 1, when input argument is true and 0 vice visa

Intrinsic Static Structure

16

□ A Probabilistic Generative Model

- ▣ The likelihood of d_x^t w.r.t. the given intrinsic static structure


$$p(d_x^t | Z_x, \omega_x) = \omega_x^1 \mathcal{N}(d_x^t | Z_x, \tau_x^{-1}) + \omega_x^2 \mathcal{U}_f(d_x^t | Z_x) + \omega_x^3 \mathcal{U}_b(d_x^t | Z_x)$$

- ▣ Gaussian prior over Z_x

$$p(Z_x) = \mathcal{N}(Z_x | \mu_x, \lambda_x^{-1})$$

- ▣ Dirichlet prior over the frequency of each state

$$p(\omega_x) = \text{Dir}(\omega_x | \alpha_{1,x}, \alpha_{2,x}, \alpha_{3,x})$$

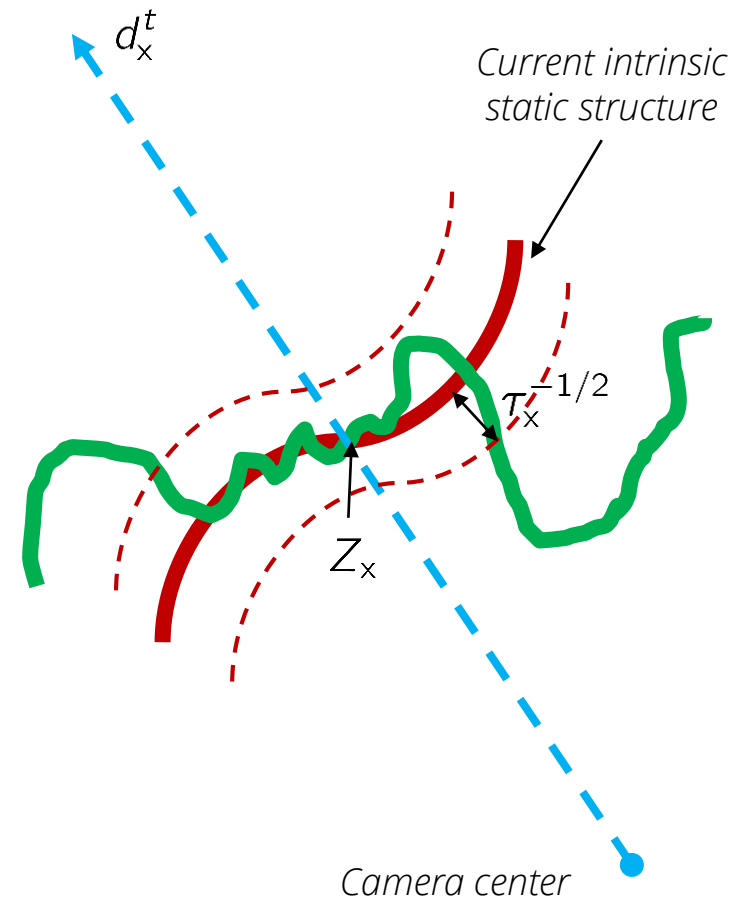

Intrinsic Static Structure

17


□ A Probabilistic Generative Model

▣ The posterior

$$p(Z_x, \omega_x | \mathcal{D}_x^t) = \frac{p(d_x^t | Z_x, \omega_x) p(Z_x, \omega_x | \mathcal{D}_x^{t-1})}{p(d_x^t | \mathcal{D}_x^{t-1})}$$

\mathcal{D}_x^{t-1} is the set of previous depth samples

$\mathcal{D}_x^t = \{\mathcal{D}_x^{t-1}, d_x^t\}$ is the set of current samples

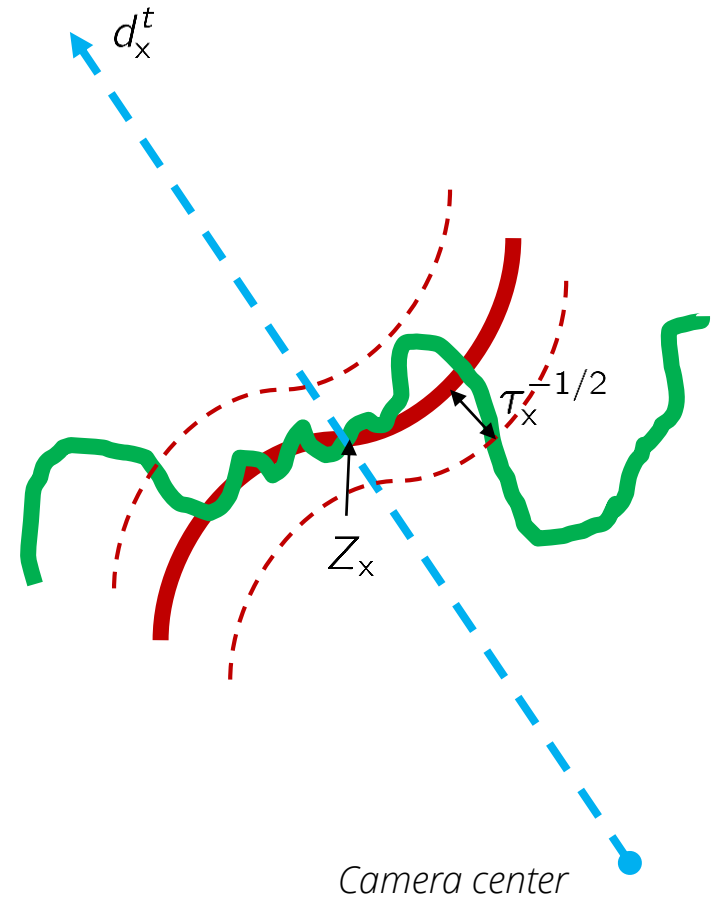

On-line Update Scheme

18

- A Probabilistic Generative Model

- The posterior


$$p(Z_x, \mathbf{w}_x | \mathcal{D}_x^t) = \frac{p(d_x^t | Z_x, \mathbf{w}_x) p(Z_x, \mathbf{w}_x | \mathcal{D}_x^{t-1})}{p(d_x^t | \mathcal{D}_x^{t-1})}$$

\mathcal{D}_x^{t-1} is the set of previous depth samples

$\mathcal{D}_x^t = \{\mathcal{D}_x^{t-1}, d_x^t\}$ is the set of current samples


If the input frame **only** contains the **static scene** and **outliers**, the updated intrinsic static structure will be governed by the posterior, and we have

- The reliability of the model is $\mathbb{E}_{p(\omega_x|\mathcal{D}_x^t)} [\omega_x^1]$
- Its probable depth is $\mathbb{E}_{p(Z_x|\mathcal{D}_x^t)} [Z_x]$
- Variational approximation for efficiency ✓

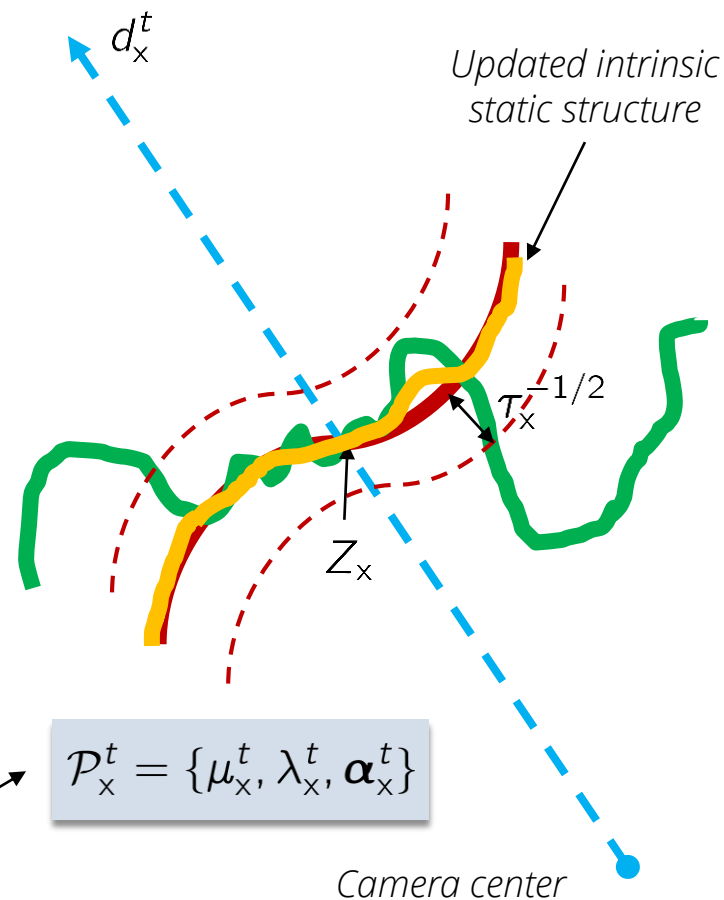


On-line Update Scheme


19

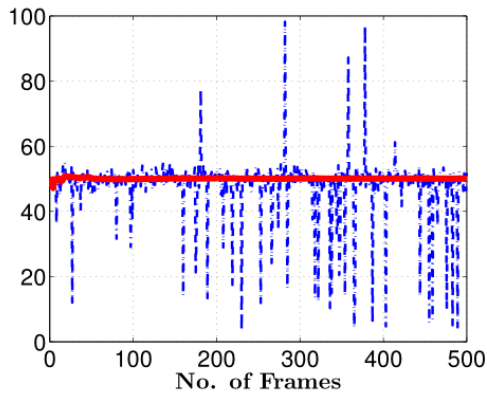


(a) Z_x^t v.s. D_x^t

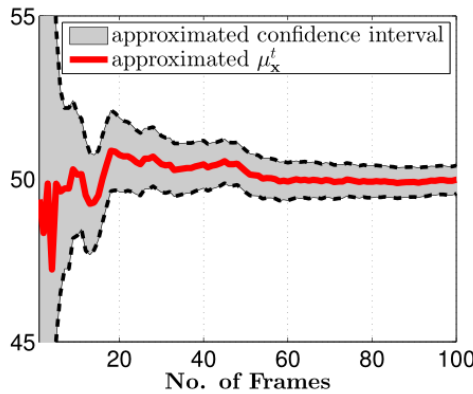

(b) Confidence interval w.r.t. Z_x^t

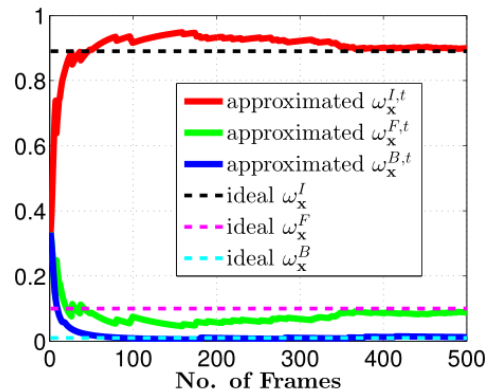

(c) Evolution of each states' portions

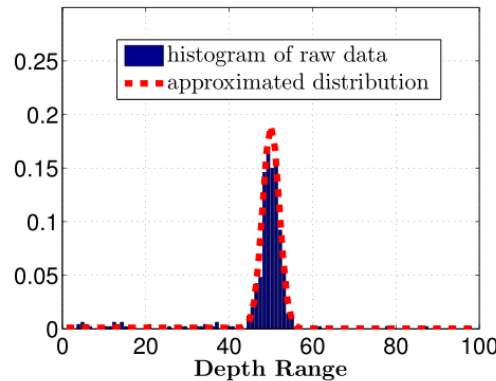

(d) $q^T(d_x | \mathcal{P}_x^{D,T})$ v.s. data histogram

■ Variational approximation for a 1D depth signal

a) the probable depth values of the intrinsic static structure versus the raw depth signals

b) The confidence interval of the intrinsic static structure

c) The portions of three states

d) The approximated date distribution $q^T(d_x | \mathcal{P}_x^T)$ versus the histogram of the raw data

The nature of the input data samples is still well captured by the variational approximation

On-line Update Scheme

20


If the input frame contains the dynamic content, the posterior w.r.t. **each state** indicates the criterion to update the intrinsic static structure

State-I: fuse the new samples into the current model

State-II: leave the current model unchanged

State-III: have a risk that current model is incorrect, might require re-initialization

- Results after variational approximation are valid for **State-I** and **State-II**
- Only need *an additional criterion* for **State-III**

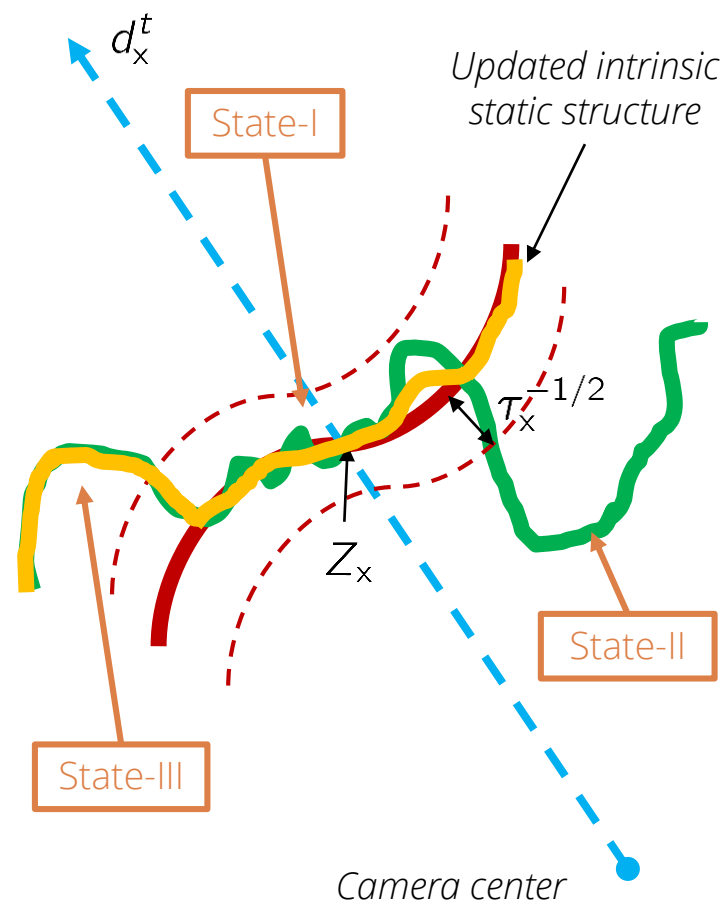

On-line Update Scheme

21

- Re-initialization to avoid incorrect estimation when

- Ratio $\rho_x = \alpha_{3,x}^t / \alpha_{1,x}^t > T_\rho$


It means the percentage of **State-III** is too large to provide enough confidence that current estimation is true

- Increment $\Delta_F \alpha_{3,x} = \alpha_{3,x}^t - \alpha_{3,x}^{t-F} > T_F$

It means there are successive frames that the states of input depth samples are **State-III**

- Or texture consistency is violated at the locations of **State-III**

If RGB-D video is applicable. One step further, we can exploit the conditional random field to robustly find the re-initialized region

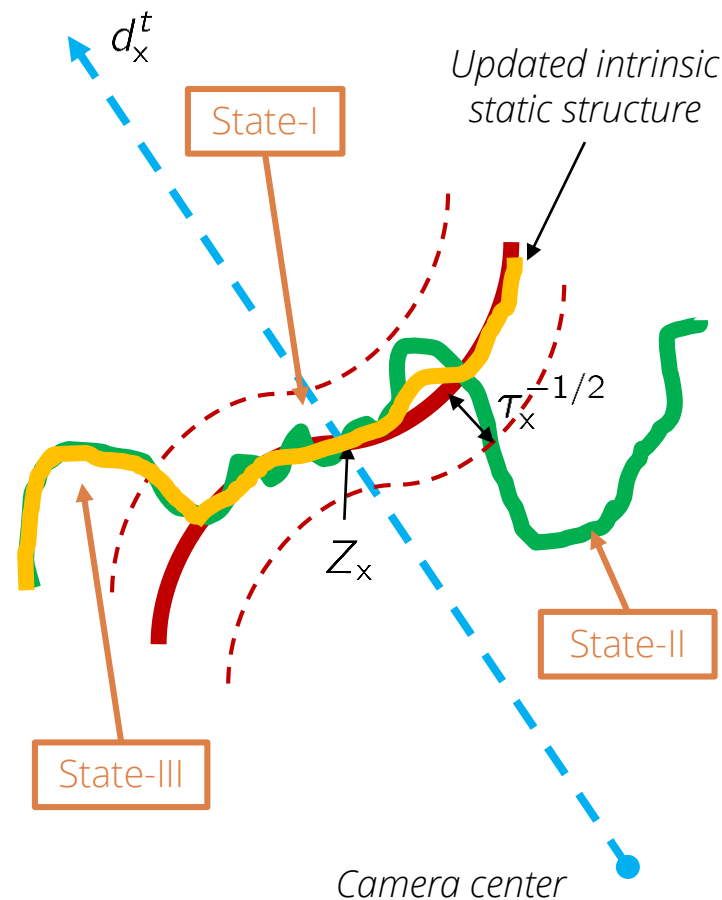

On-line Update Scheme

22

Algorithm 1: Intrinsic Static Structure Update Scheme

input : Input depth sequence $\{d_x^t | t = 1, 2, \dots, N\}$;
Initial parameter set $\mathcal{P}_{init} = \{\mu_x^0, \lambda_x^0, \alpha_x^0\}$;
output: Current parameter set $\mathcal{P}_x^t = \{\mu_x^t, \lambda_x^t, \alpha_x^t\}$;

1	$\mu_x^0 \leftarrow d_x^1, \mathcal{P}_x^1 \leftarrow \mathcal{P}_{init};$	➤ Parameter initialization
2	for $t \leftarrow 2$ to N do	
3	if $d_x^t > 0$ then	➤ When input depth sample is valid
4	estimate parameter set \mathcal{P}_x^t based on \mathcal{P}_x^{t-1} by variational approximation;	
5	$\rho_x \leftarrow \alpha_{3,x}^t / \alpha_{1,x}^t, \Delta_F \alpha_{3,x} \leftarrow \alpha_{3,x}^t - \alpha_{3,x}^{t-F};$	
6	if $\rho_x > T_\rho$ or $\Delta_F \alpha_{3,x} > T_F$ then	➤ No texture information is applicable
7	$\mu_x^0 \leftarrow d_x^t, \mathcal{P}_x^t \leftarrow \mathcal{P}_{init};$	
8	else	➤ When input depth sample is valid,
9	$\mathcal{P}_x^t \leftarrow \mathcal{P}_x^{t-1}$	just copy the previous model

Temporal Depth Video Enhancement


23

- Blend **input depth frame/spatially enhanced depth frame** with the estimated **intrinsic static structure**
 - The intrinsic static structure $d_{iss,x}^t = \mu_x^t$
 - The posterior of **state-I**

$$\gamma_{iss}(d_x^t) = \alpha_{1,x}^{t-1} \mathcal{N}(d_x^t | \mu_x^{t-1}, \tilde{\tau}_x^{t-1})^{-1} / q^t(d_x^t)$$
 - The temporally enhanced depth value
$$d_{S,x}^t = (1 - \gamma_{iss}(d_x^t))d_x^t + \gamma_{iss}(d_x^t)d_{iss,x}^t$$

For RGB-D video, Both depth and texture information are helpful to fill **depth holes**


- Inference the chance that the hole region belongs to the intrinsic static structure

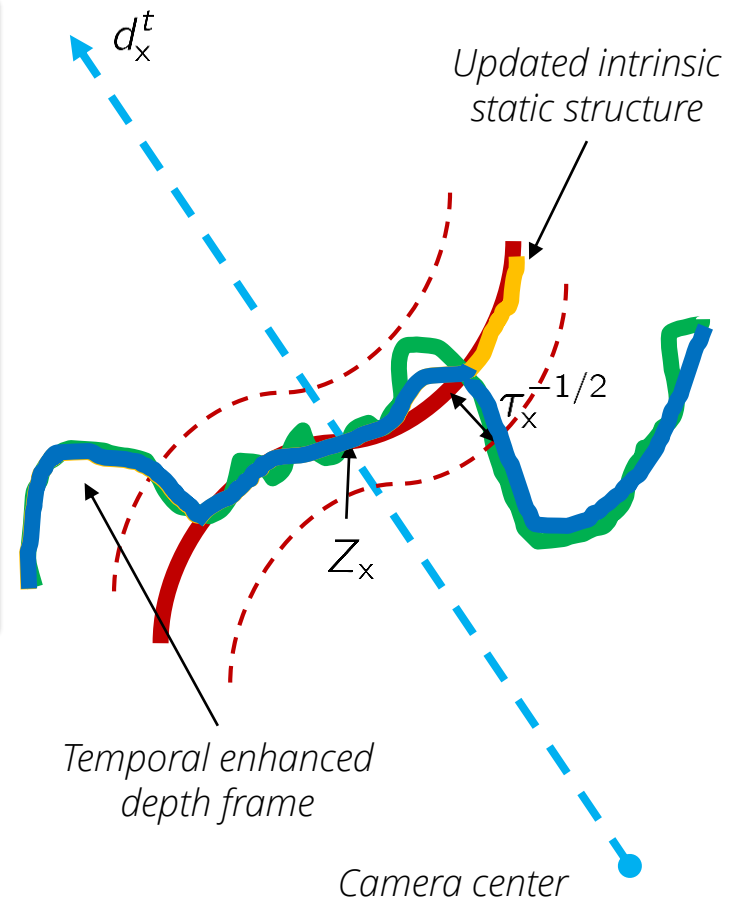


Experimental Results

24

□ Intrinsic static structure estimation – 1D case

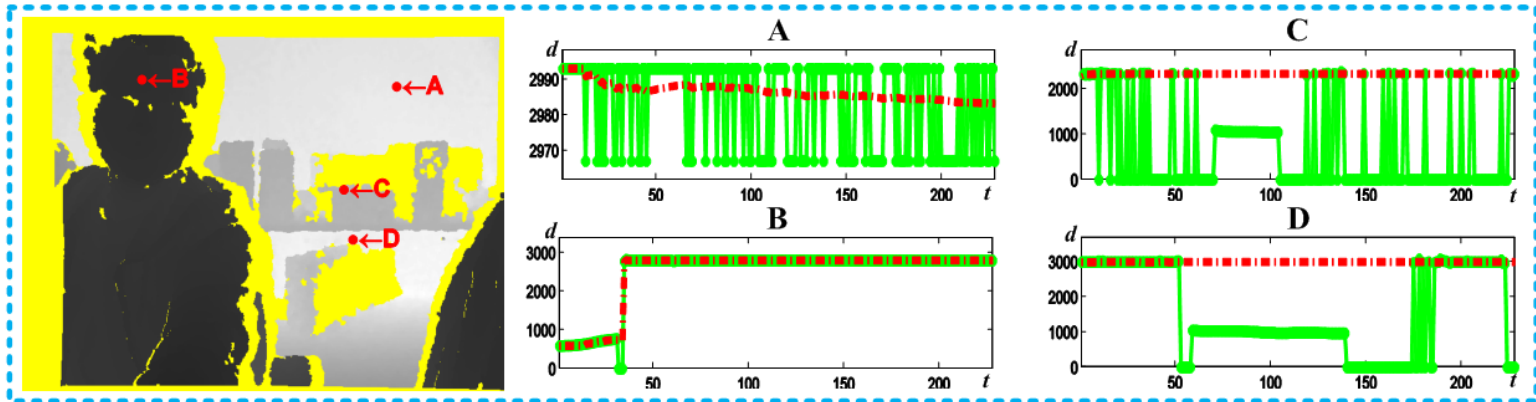

Kinect Sequence

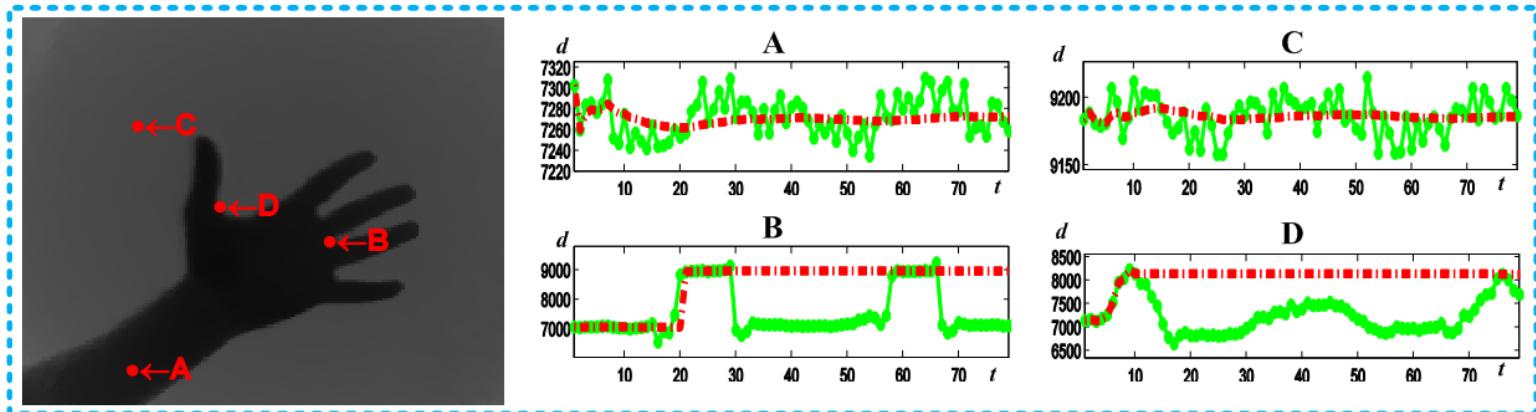


ToF Sequence

Experimental Results

25

- Intrinsic static structure estimation – 2D case

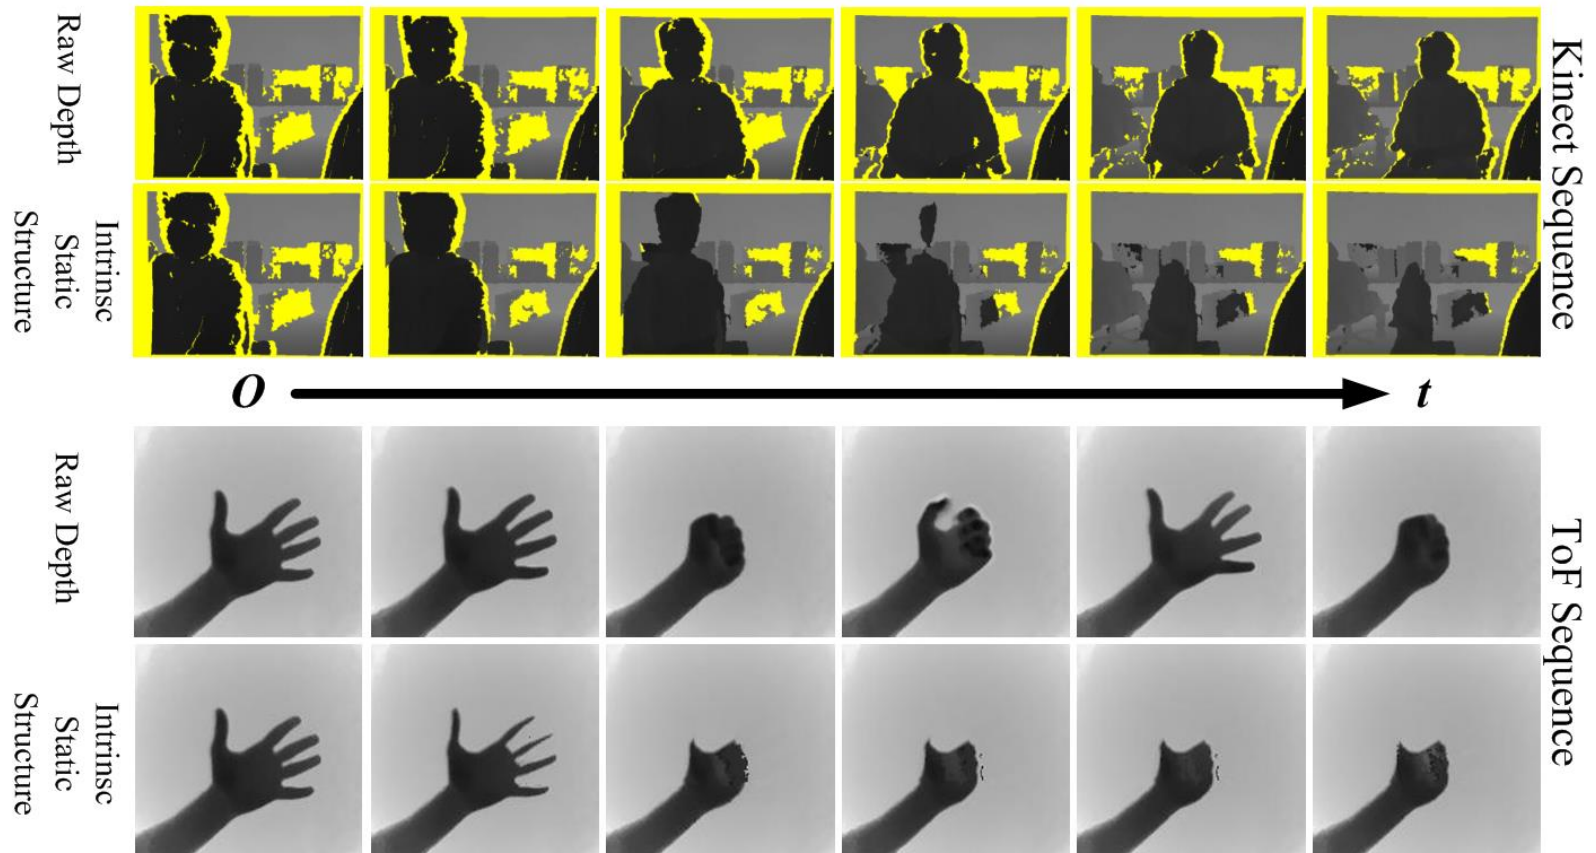


(b) Example: depth videos


Experimental Results

26


Temporal enhancement on synthesis static scenes

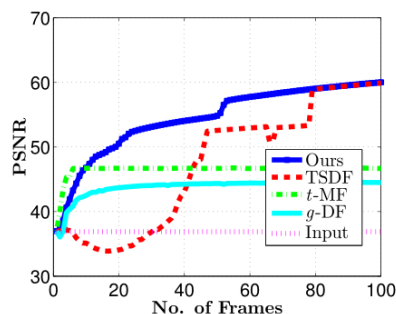


(a) $\omega_d = 10^{-3}, \sigma_d = 2.5$

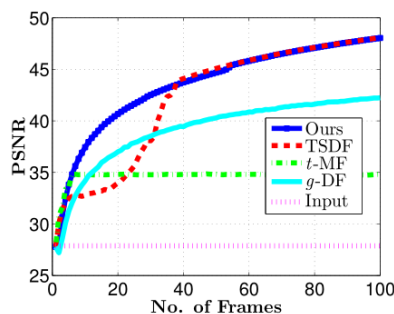


(b) $\omega_d = 10^{-3}, \sigma_d = 10$

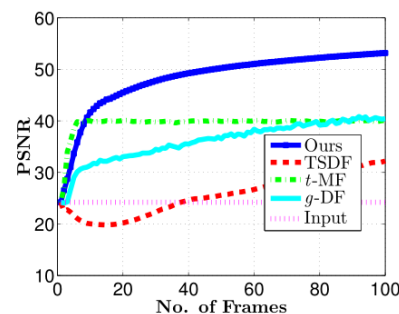

(c) $\omega_d = 5 \times 10^{-2}, \sigma_d = 5$

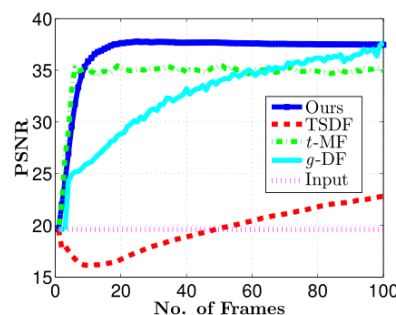

(d) $\omega_d = 10^{-1}, \sigma_d = 2.5$

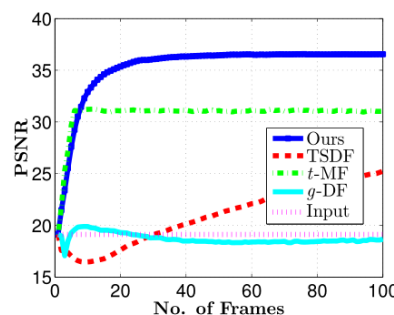

(e) $\omega_d = 10^{-1}, \sigma_d = 10$



Input disparity map is contaminated by

$$p(d_n|Z) = (1 - \omega_d)\mathcal{N}(d_n|Z, \sigma_d^2) + \omega_d\mathcal{U}(d_n)$$


Algorithms	<i>t</i> -MF ($w=5/10$)	<i>g</i> -DF	TSDF	Ours
Running time (s)	0.0188 / 0.0309	1.9186	0.6847	0.0223

Per-frame Running time comparison
(MATLAB Platform)

Experimental Results

27

□ Temporal enhancement on static scenes

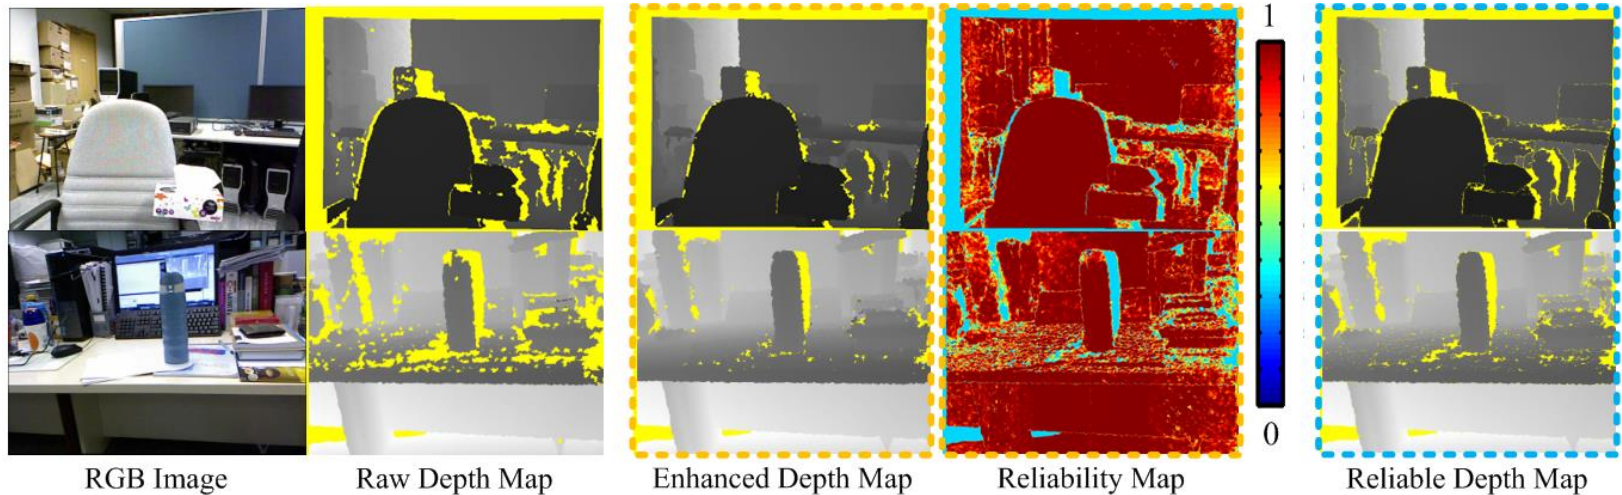


The reliability quantity $r_x = \alpha_{1,x}^t / \sum_{i=1}^3 \alpha_{i,x}^t$

- The reliability map indicates that most of the flat or smooth surfaces of the captured scene are of high reliability to be static
- Around edges or highly slanted surfaces, the reliability map owns lower values

Experimental Results

28


□ Temporal enhancement on static scenes

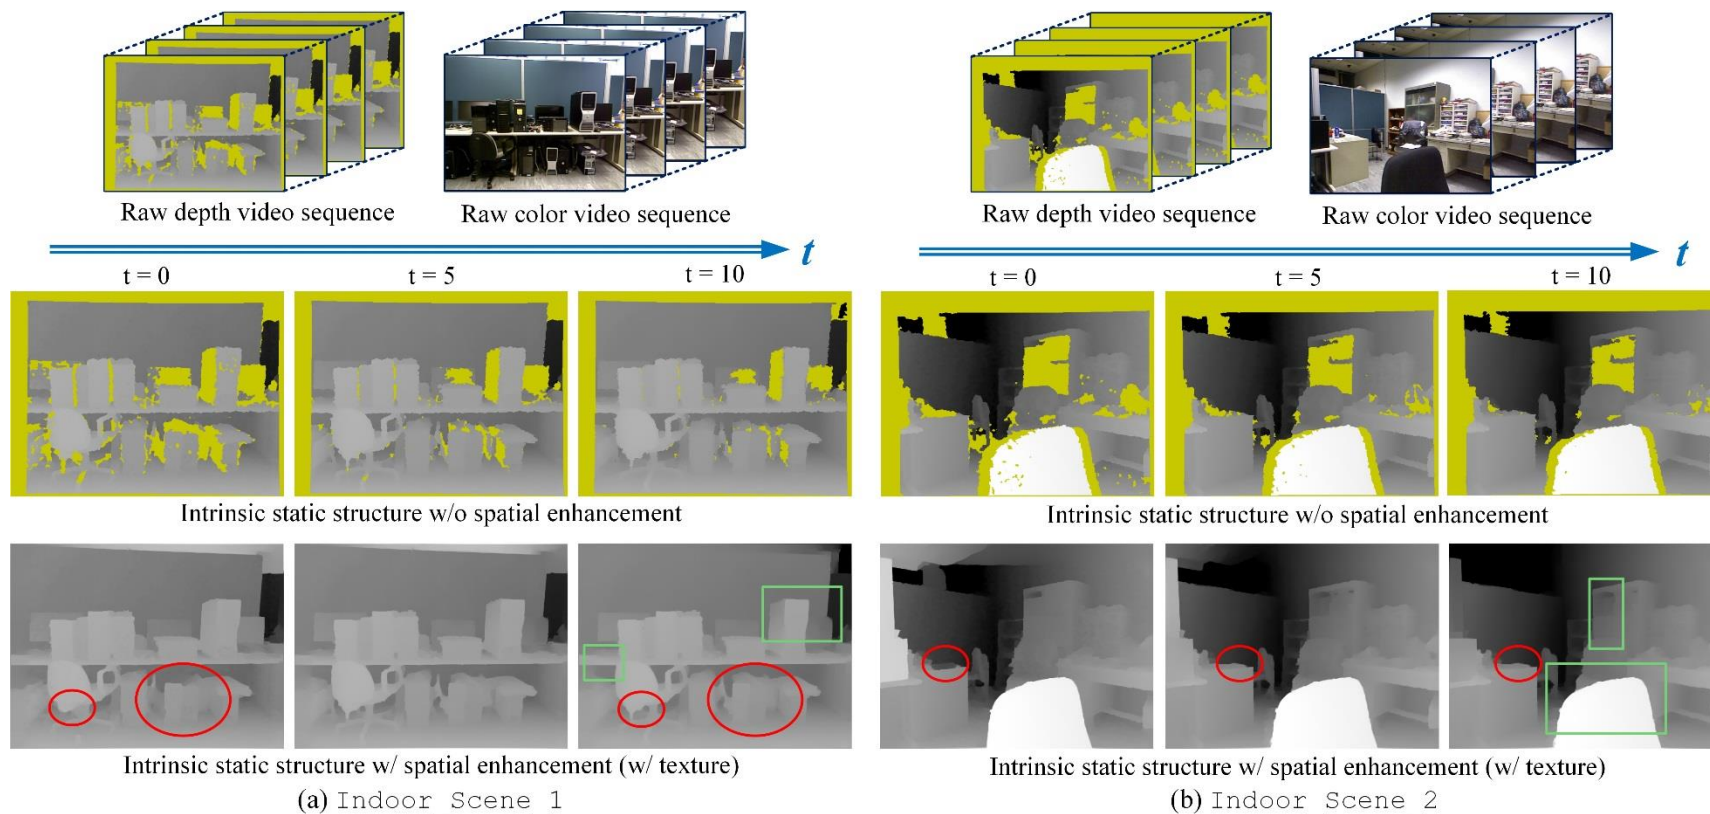

Experimental Results

29

□ Temporal enhancement on dynamic scenes

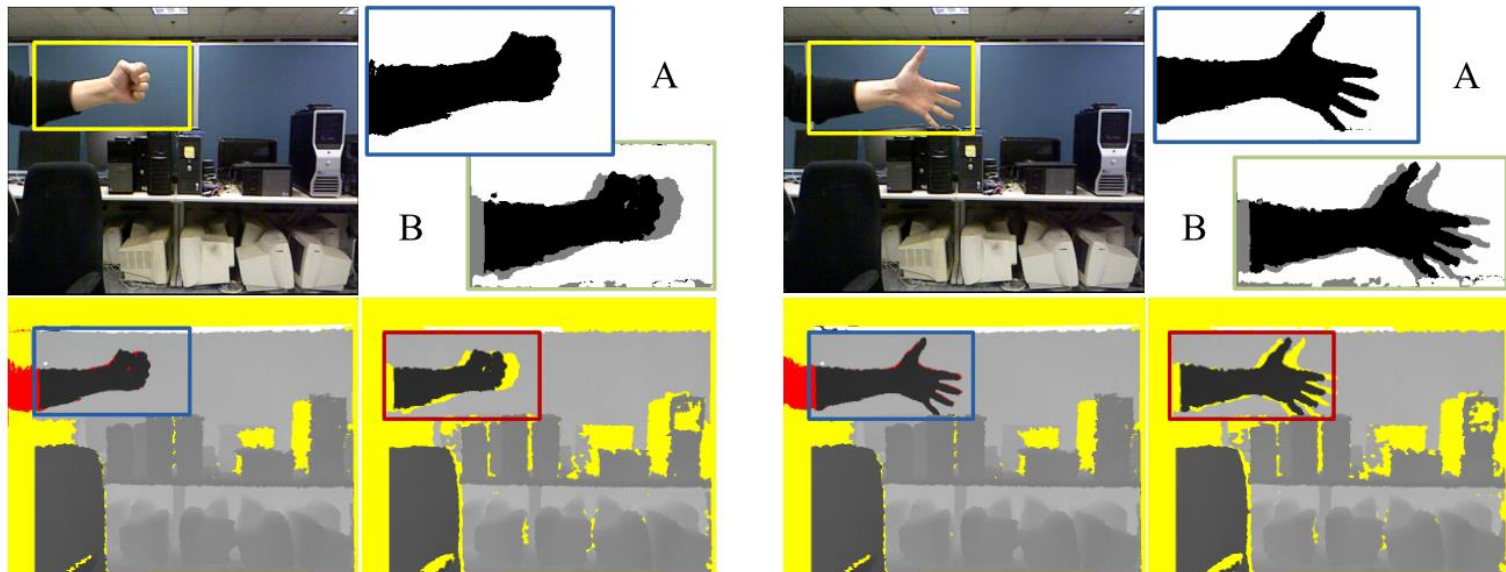


- Effectively and accurately find the moving objects according to the **state classification**, with the help of conditional random field and the registered color frame
- Enhance the foreground region by Joint bilateral filter individually, fill in the holes in the static region by the estimated intrinsic static structure
- Suppress noise and flickering artifacts at static regions

Experimental Results

30

□ Temporal enhancement on dynamic scenes

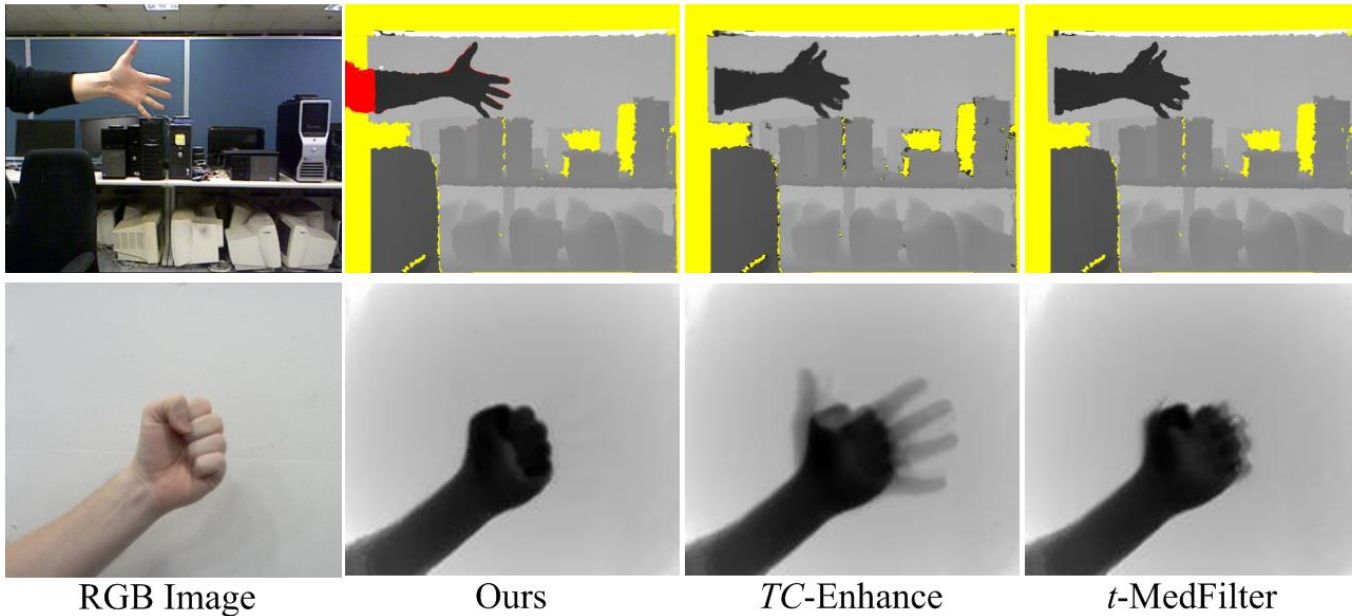

- Effectively and accurately find the moving objects according to the **state classification**, with the help of conditional random field and the registered color frame
- Less motion delay will occur


Experimental Results

31




Spatiotemporal depth
video enhancement


(c) Coherent spatiotemporal JBF

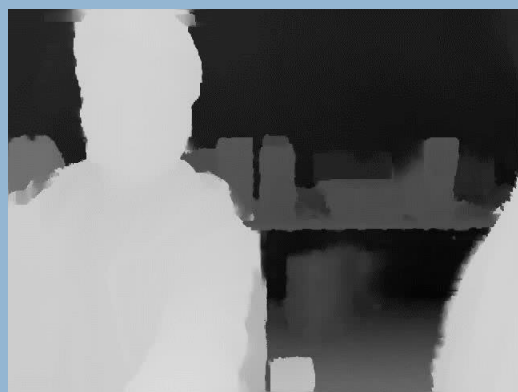

(d) Spatiotemporal WMF

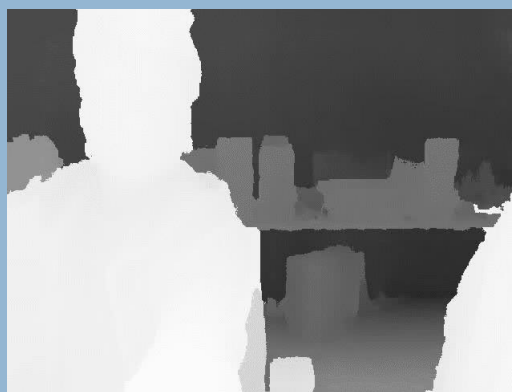

(e) Ours

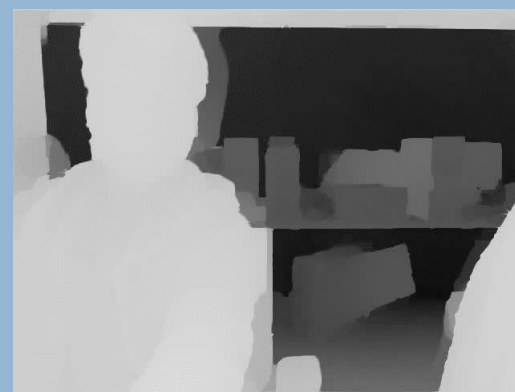

Conclusion & Future Work

32

- Temporal flickering problem of conventional depth enhancement approaches
 - Introduction of the intrinsic static structures and its application to temporal enhancement of a depth video
 - Discuss the its potential to handle the static and dynamic scenes
-
- Proper way to further combine spatial and temporal enhancement based on the intrinsic static structure into a whole framework
 - Research on a more general formulation of the static structure
 - How to deal with depth video captured by moving cameras, and etc.

October 27–30, 2014: CNIT La Défense, Paris, France

ICIP 2014
PARIS
IEEE International Conference on Image Processing



IEEE

*IEEE
Signal Processing Society*



Thank you!

Any Questions?

On-line Update Scheme

34

□ Variational Parameter Estimation $\mathcal{P}_x^t = \{\mu_x^t, \lambda_x^t, \alpha_x^t\}$

- Factorize the posterior into independent Gaussian and Dirichlet distributions

$$q^t(Z_x, \omega_x) = q^t(Z_x)q^t(\omega_x) \sim p(Z_x, \omega_x | \mathcal{D}_x^t)$$

$$q^t(Z_x) = \mathcal{N}(Z_x | \mu_x^t, (\lambda_x^t)^{-1})$$

$$q^t(\omega_x) = \text{Dir}(\omega_x | \alpha_{1,x}^t, \alpha_{2,x}^t, \alpha_{3,x}^t)$$

- The reliability of the model $\mathbb{E}_{p(\omega_x | \mathcal{D}_x^t)} [\omega_x] \approx \mathbb{E}_{q^t(\omega_x)} [\omega_x]$
- The probable depth is $\mathbb{E}_{p(\omega_x | \mathcal{D}_x^t)} [\omega_x] \approx \mu_x^t$

- The posterior can be approximated by

$$q^t(Z_x, \omega_x) \sim \frac{p(d_x^t | Z_x, \omega_x) q^{t-1}(Z_x, \omega_x)}{q^t(d_x^t)} = Q(Z_x, \omega_x | d_x^t)$$

Recursive estimation is possible!

On-line Update Scheme

35

□ Variational Parameter Estimation $\mathcal{P}_x^t = \{\mu_x^t, \lambda_x^t, \alpha_x^t\}$

- Factorize the posterior into independent Gaussian and Dirichlet distributions

$$q^t(Z_x, \omega_x) = q^t(Z_x)q^t(\omega_x) \sim p(Z_x, \omega_x | \mathcal{D}_x^t)$$

$$q^t(Z_x) = \mathcal{N}(Z_x | \mu_x^t, (\lambda_x^t)^{-1})$$

$$q^t(\omega_x) = \text{Dir}(\omega_x | \alpha_{1,x}^t, \alpha_{2,x}^t, \alpha_{3,x}^t)$$

- The posterior can be approximated by

$$q^t(Z_x, \omega_x) \sim \frac{p(d_x^t | Z_x, \omega_x) q^{t-1}(Z_x, \omega_x)}{q^t(d_x^t)} = Q(Z_x, \omega_x | d_x^t)$$

- Moment matching to estimate the hyperparameters

$$q^t(Z_x) : \begin{cases} \mu_x^t = \mathbb{E}_{Q(Z_x | d_x^t)} [Z_x] \\ \lambda_x^t = \frac{1}{\mathbb{E}_{Q(Z_x | d_x^t)} [Z_x^2] - \mathbb{E}_{Q(Z_x | d_x^t)} [Z_x]^2} \end{cases} \quad q^t(\omega_x) : \begin{cases} \alpha_{i,x}^t = \mathbb{E}_{Q(\omega_x^i | d_x^t)} [\omega_i] \cdot \alpha_{o,x}^t, \quad i = 1, 2, 3 \\ \alpha_{o,x}^t = \frac{\sum_{i=1}^3 \mathbb{E}_{Q(\omega_x^i | d_x^t)} [\omega_x^i] - \mathbb{E}_{Q(\omega_x^i | d_x^t)} [(\omega_x^i)^2]}{\sum_{i=1}^3 \mathbb{E}_{Q(\omega_x^i | d_x^t)} [(\omega_x^i)^2] - \mathbb{E}_{Q(\omega_x^i | d_x^t)} [\omega_x^i]^2} \end{cases}$$

Closed-form solutions!

