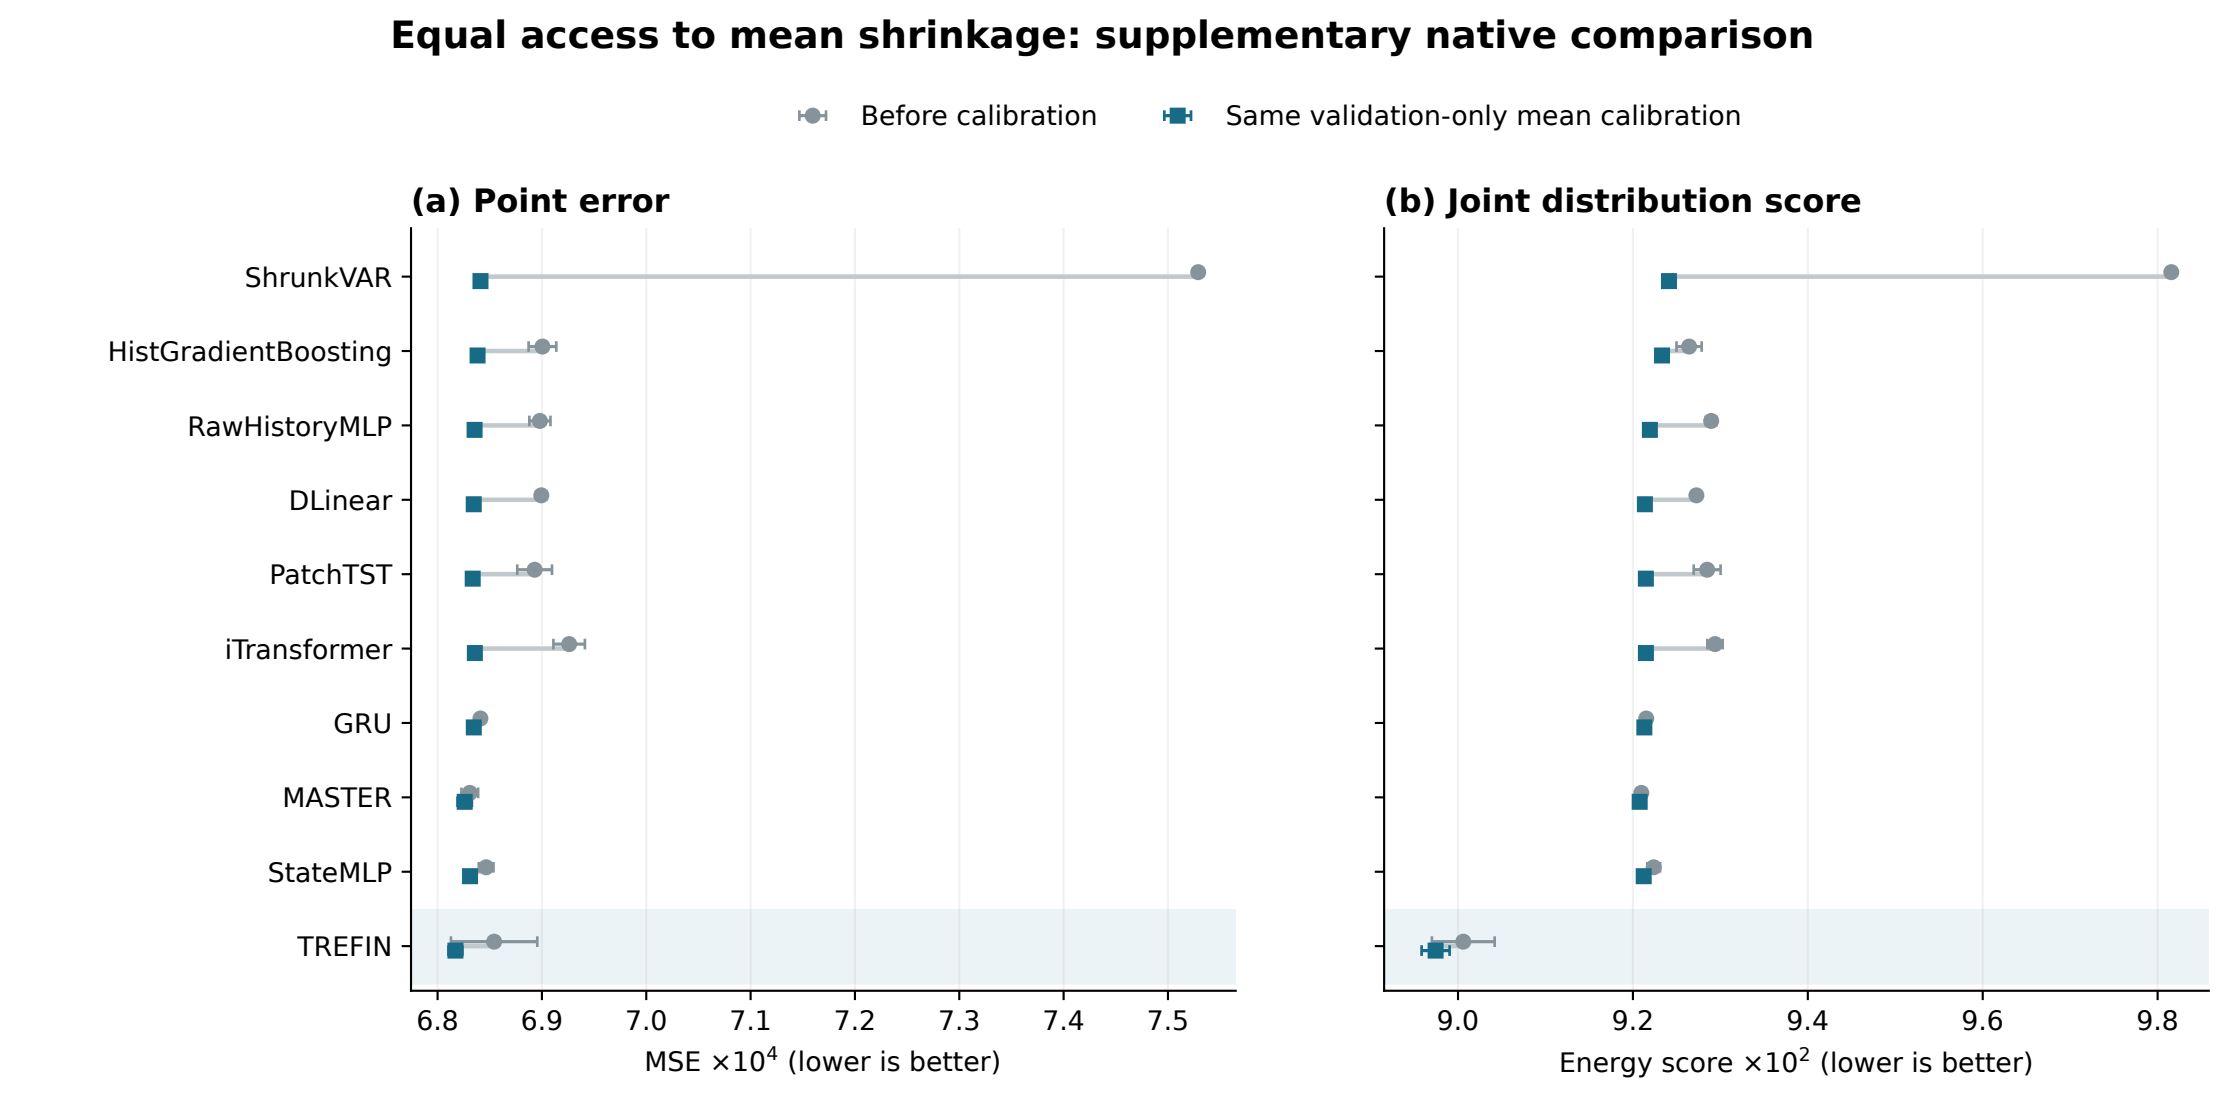

Fold 1; five training seeds; error bars = sample SD. All checkpoints are frozen.
Supplementary native baselines use training-residual scenarios; TREFIN uses its original decoder.