Finite-horizon sensitivity with explicit neighborhoods

15 archived models · 32 held-out origins per fold · all five forecast leads

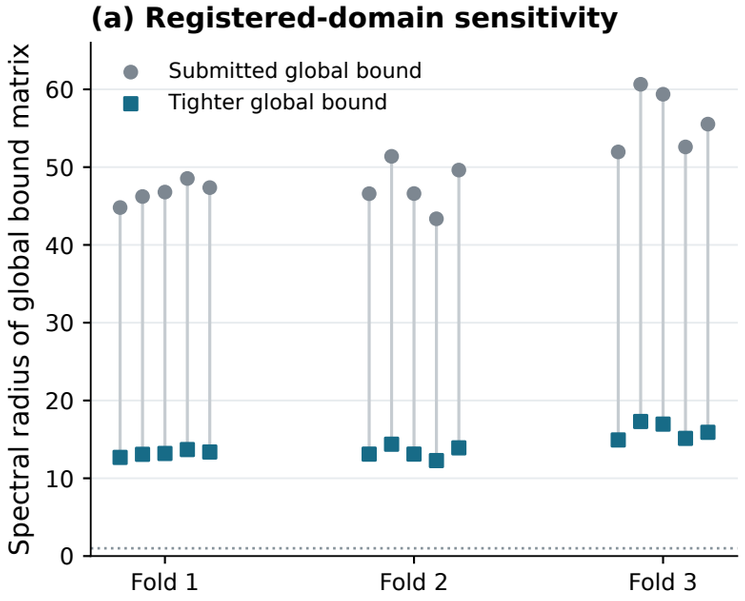

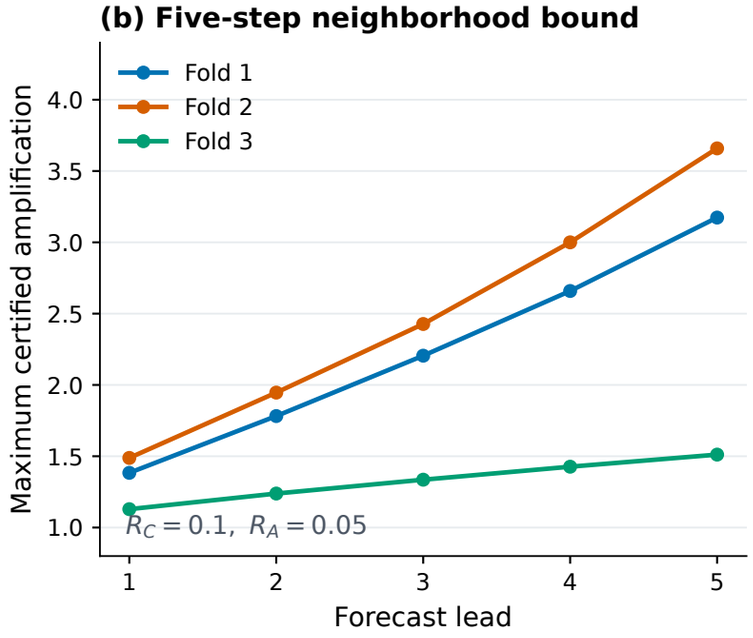

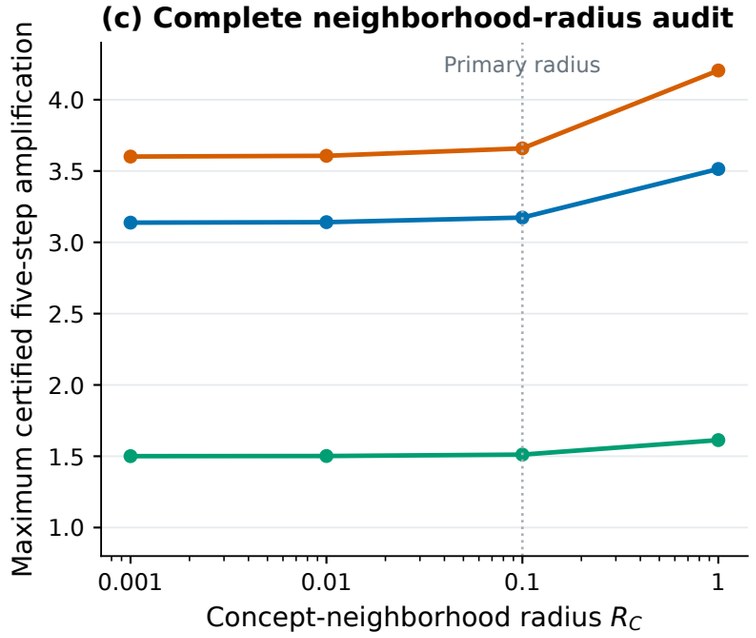

Neighborhoods use full-block Frobenius radii R_C and $R_A = R_C/2$; initial errors are at most 0.1 times these radii.

Panels (b,c): uniform analytic bounds in the weighted block-max norm; all 480 trajectories satisfy the five-step containment criterion.