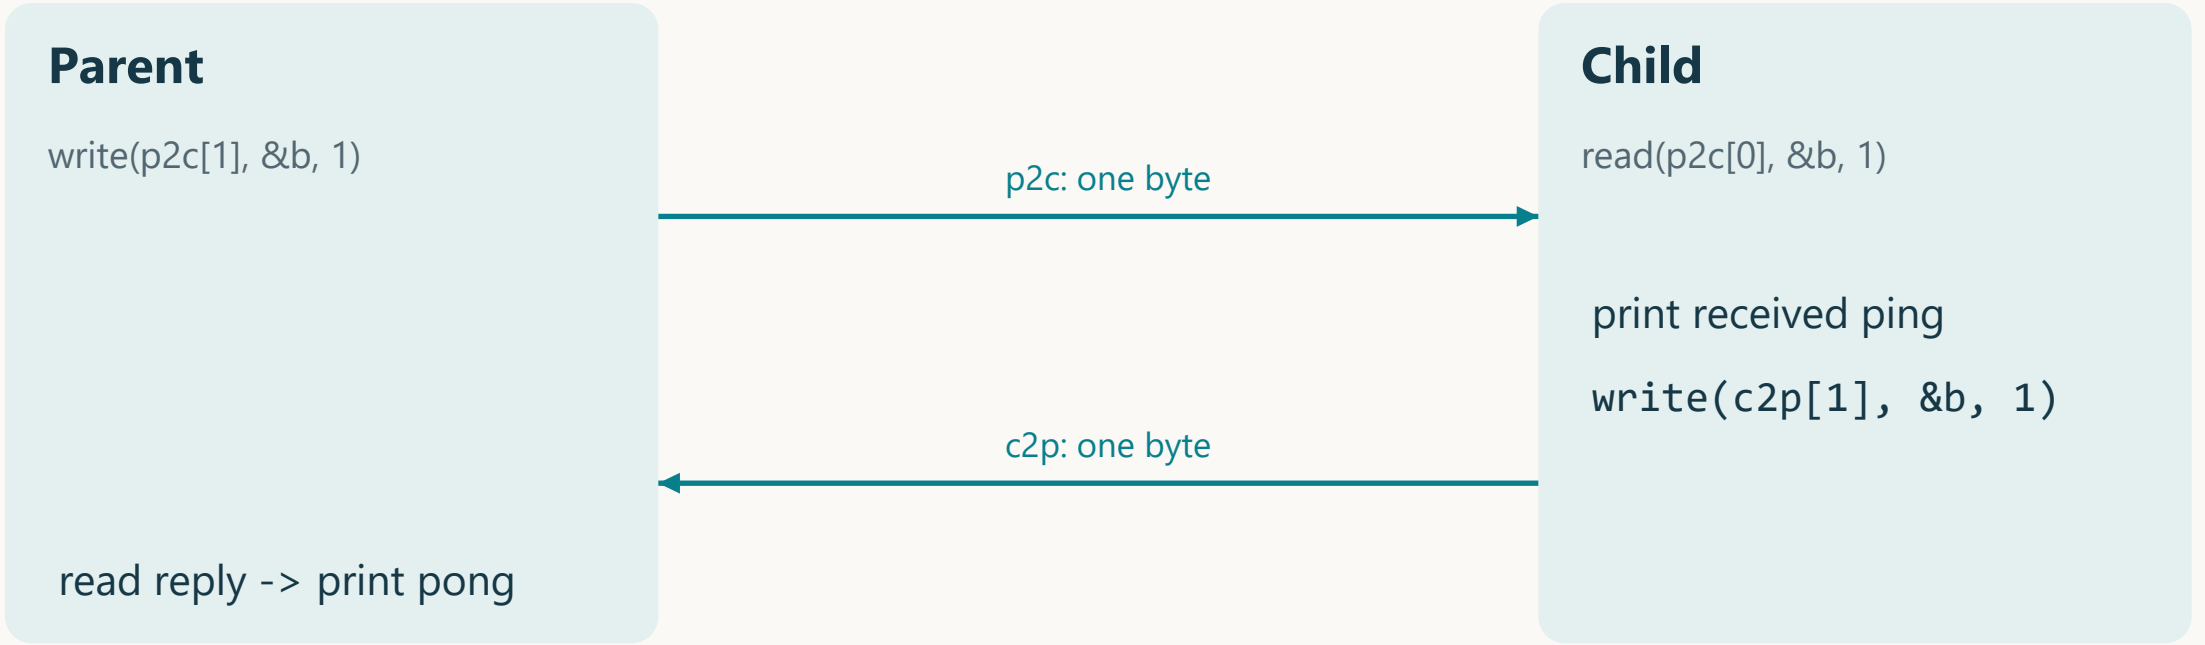


The parent blocks in read(c2p[0], ...). The reply creates the ordering.