


V 3    V 4 V 5  
.....



1994

1995

V 3 V 4 V 5 V 6

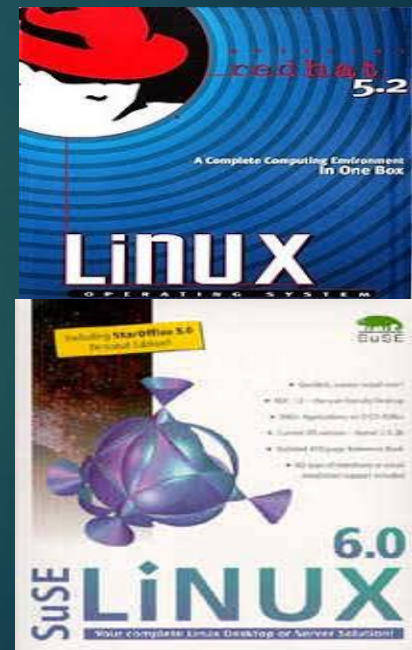


1998





## Grandes empresas y el software libre



es un



### • Canonical


- Nace en 2004
- Distribución más popular de Linux
  - Ubuntu
  - Ubuntu Server
  - Ubuntu Netbook Remix
  - Soporte para empresas



### • Red Hat

- Nace en 1993
- Segunda distribución más popular de Linux
  - Fedora
  - Red Hat Enterprise Linux

fedora<sup>f</sup>

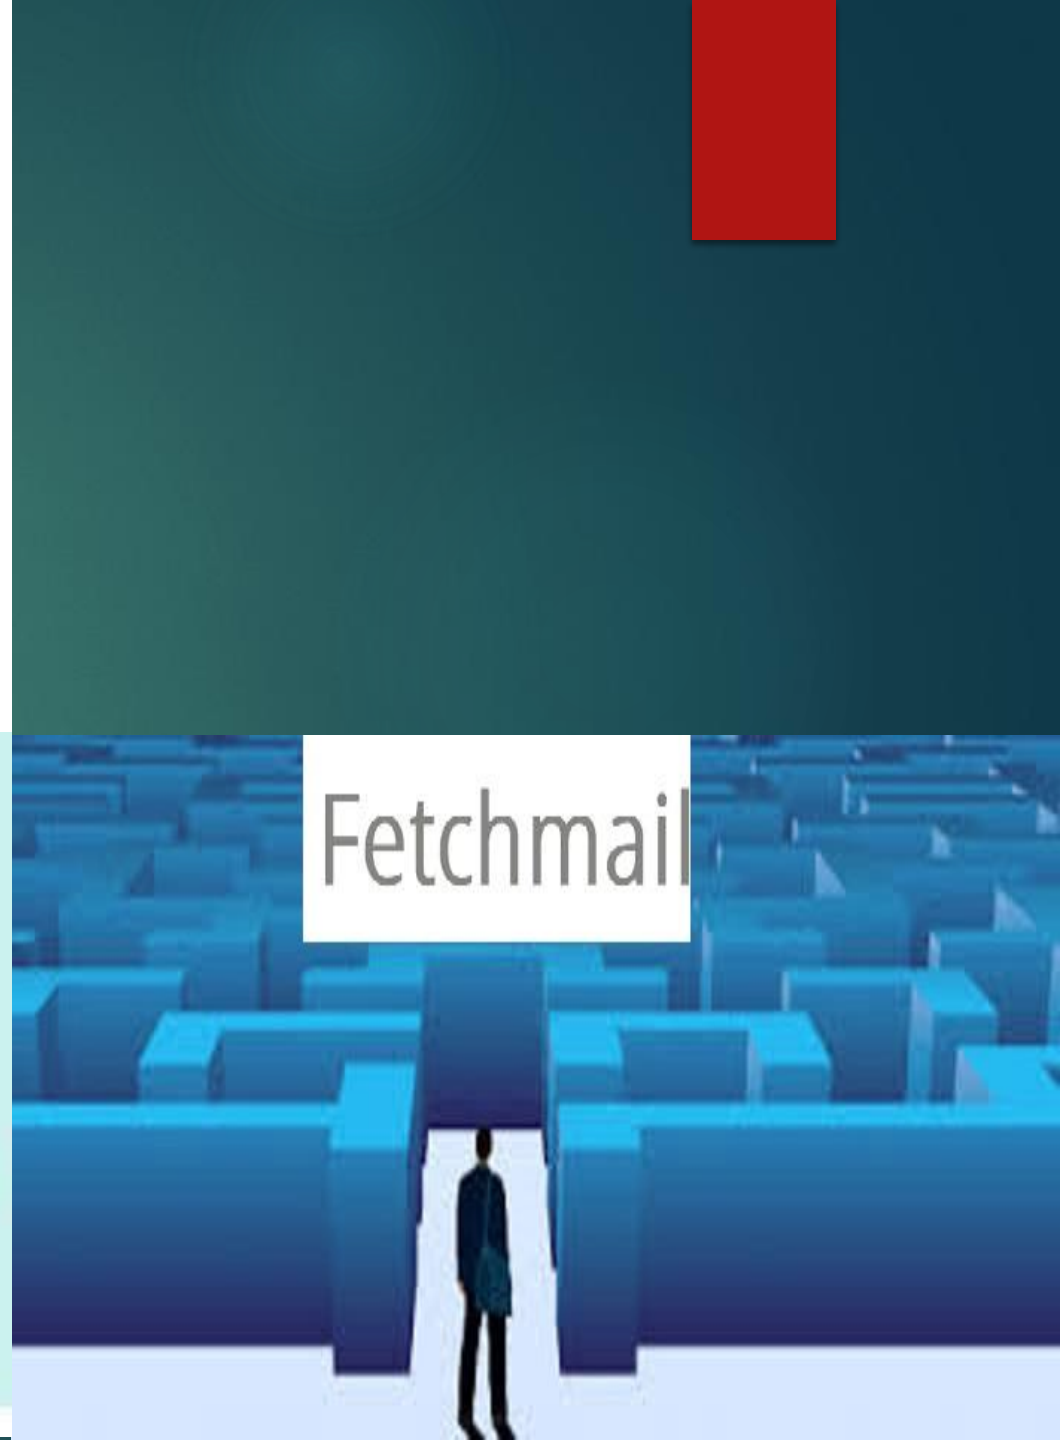





























## fetchmail launcher



Fetchmailconf 1.16

Use 'Configure fetchmail' to tell fetchmail about the remote servers it should poll (the host name, your username there, whether to use POP or IMAP, and so forth).

Configure fetchmail

Use 'Test fetchmail' to run fetchmail with debugging enabled. This is a good way to test out a new configuration.

Test fetchmail

Use 'Run fetchmail' to run fetchmail in foreground. Progress messages will be shown, but not debug messages.

Run fetchmail

Or you can just select 'Quit' to exit the launcher now.

Quit







Mime

Cabecera  
de mensaje

--

RFC-822

Cuerpo de  
mensaje

Texto
Audio
Imagen
Video

MIME RFC-1341



\*rc.local (/etc) - gedit

Archivo Editar Ver Buscar Herramientas Documentos Ayuda

Abrir Guardar Deshacer

\*rc.local

```
#!/bin/sh -e
#
# rc.local
#
# This script is executed at the end of each multiuser runlevel.
# Make sure that the script will "exit 0" on success or any other
# value on error.
#
# In order to enable or disable this script just change the execution
# bits.
#
# By default this script does nothing.

/opt/lampp/lampp start
exit 0
```

sh

Ancho de la tabulación: 8

Ln 15, Col 23

INS

# rc.local

```
01011101010010
10001010110101
01010010101111
01010010010100
01101010010101
```











