

**DESIGN AND IMPLEMENTATION OF A SHELTER LOCATION-  
ALLOCATION SYSTEM IN CALUMPIT, BULACAN**

An Undergraduate Thesis Presented to  
the Faculty of the College of Science  
of the Bulacan State University  
City of Malolos, Bulacan

In Partial Fulfillment of the Requirements for the Degree  
Bachelor of Science in Mathematics with  
Specialization in Computer Science

by  
BRYAN JETT T. CALULO  
LOVELY ANGELINE OL. CUNANAN  
ELIJAH IÑIGO C. FABIAN

under the supervision of  
VALENTINE BLEZ L. LAMPAYAN, PhD

May 2025

## APPROVAL SHEET

In partial fulfillment of the requirements for the degree Bachelor of Science in Mathematics with specialization in Computer Science, this thesis entitled "**Design and Implementation of a Shelter Location-Allocation System in Calumpit, Bulacan**" has been prepared and submitted by Bryan Jett T. Calulo, Lovely Angeline OL. Cunanan, and Elijah Iñigo C. Fabian who are hereby recommended for oral examination.

**VALENTINE BLEZ L. LAMPAYAN, PhD**  
Adviser

The document is approved in partial fulfillment of the requirements for the degree Bachelor of Science in Mathematics with specialization in Computer Science by the Committee on Oral Examination.

**JAYSON M. VICTORIANO, PhD**  
Chairperson

**AARHUS M. DELA CRUZ**  
Member

**ARCEL F. GALVEZ**  
Member

The document is accepted and approved in partial fulfillment of the requirements for the degree Bachelor of Science in Mathematics with specialization in Computer Science by the Committee on Oral Examination.

**THELMA V. PAGTALUNAN, PhD**  
Dean, College of Science

May 2025

## **ACKNOWLEDGMENT**

The researchers would like to express their deepest gratitude to God Almighty for granting them strength, wisdom, and perseverance to complete this study.

The researchers extend their heartfelt appreciation to their thesis adviser, Dr. Valentine Blez Lampayan, for her unwavering support, guidance, and valuable insights throughout the development of this thesis. Her expertise and encouragement have played an important role in refining the study. A special thanks to Professor Marrick Neri for sharing his insights and expertise during the researchers' visit to the University of the Philippines Diliman. His knowledge and recommendations have significantly contributed to the improvement of the thesis. The researchers are also deeply grateful to Leah Manongas, whose work served as a reference for the models used in this study. Her thesis provided a strong foundation that helped the researchers in the shelter location allocation process.

Special thanks to the creator of `bulsuthsis.cls`, and its accompanying files `thesis.tex` and `thesis-structure.tex`, Mr. Harris R. Dela Cruz. With these, the authors were able to typeset conveniently and efficiently an elegant and beautiful thesis.

The researchers are also deeply grateful to the IT Experts, MDRRMO, and MSWDO Staff of Calumpit who took the time to evaluate our system and provide valuable feedback. Their insights have helped us identify areas for improvement and refine our work.

The researchers would like to express sincere gratitude to the Department of Science and Technology (DOST) for their financial support, which greatly contributed to the completion of this thesis. Their assistance provided the group with resources and opportunities necessary to pursue and accomplish this research.

Furthermore, the researchers extend their appreciation to their friends and one of the researcher's significant other for their continuous support, understanding, and

patience as well as their encouragement which have been helpful in keeping their mental well-being and became our source of motivation throughout this journey.

Lastly, the researchers would like to express their utmost gratitude to their families, whose love and support have been their greatest strength. Their belief in the researchers and their encouragement throughout this academic journey have been invaluable.

This research would not have been possible without the support and contributions of everyone mentioned. Thank you all for being part of this journey.

Bryan Jett T. Calulo

Lovely Angeline OL. Cunanan

Elijah Iñigo C. Fabian

## DEDICATION

*This thesis is dedicated to our fellow Filipinos,  
for their safety and well being.*

- The authors

## ABSTRACT

The Philippines, being highly vulnerable to disasters such as typhoons and floods, ranks first in the World Risk Index. Among the municipalities of Bulacan, Calumpit is particularly prone to severe flooding. Furthermore, current evacuation system faces challenges such as overcrowding and inefficient resource use. While mathematical models can optimize shelter allocation, they are often inaccessible to decision-makers without mathematical expertise. To address this, a data-driven decision support system was developed. Shelter Location-Allocation System identifies suitable shelters and assigns communities in an optimal manner. The system integrates Bilevel No Transfer (BNT) model, considering distance, cost, capacity, and shelter hierarchy, and applies a genetic algorithm to determine the best allocation strategy. All parameters and data are fully customizable, allowing decision-makers to tailor the system to their needs. The system was evaluated by end-users and IT experts, receiving high acceptability scores, with mean ratings greater than 9.0 across all criteria. These results indicate the system's quality in supporting data-driven disaster response planning, offering a scalable solution for improving evacuation strategies in flood-prone areas.

## TABLE OF CONTENTS

<b>TITLE PAGE</b>	i
<b>APPROVAL SHEET</b>	ii
<b>ACKNOWLEDGMENT</b>	iii
<b>DEDICATION</b>	v
<b>ABSTRACT</b>	vi
<b>LIST OF TABLES</b>	ix
<b>LIST OF FIGURES</b>	xi
<b>LIST OF APPENDICES</b>	xii
<b>CHAPTER</b>	
<b>I THE PROBLEM AND ITS BACKGROUND</b>	1
Background of the Study . . . . .	1
Statement of the Problem . . . . .	4
Significance of the Study . . . . .	5
Scope and Delimitations . . . . .	6
<b>II THEORETICAL FRAMEWORK</b>	8
Related Theories . . . . .	8
Review of Related Literature and Studies . . . . .	9
Synthesis of the Review . . . . .	13
Conceptual Framework . . . . .	13
<b>III RESEARCH METHODOLOGY</b>	16
Research Design . . . . .	16
Model Adoption . . . . .	18
Process of Developing the System . . . . .	26
System Preliminaries . . . . .	35

System Evaluation . . . . .	38
Ethical Considerations . . . . .	45
<b>IV PRESENTATION, ANALYSIS AND INTERPRETATION OF DATA</b>	<b>48</b>
The Developed System . . . . .	48
Generated Shelter Location-Allocation Report . . . . .	55
System Evaluation . . . . .	56
<b>V SUMMARY, CONCLUSION AND RECOMMENDATIONS</b>	<b>61</b>
Summary of Findings . . . . .	61
Conclusion . . . . .	63
Recommendations . . . . .	64
<b>REFERENCES</b>	<b>66</b>
<b>APPENDICES</b>	<b>70</b>
<b>CURRICULUM VITAE</b>	<b>108</b>

## LIST OF TABLES

<b>Table</b>	<b>Title</b>	<b>Page</b>
1	List of tools and technologies used in the development process . . .	33
2	List of libraries installed in Python . . . . .	34
3	Variables, Descriptions, and Sources for Community and Shelter Data	38
4	Sources of Appended Shelter Data . . . . .	39
5	Mean Score Interval and its Verbal Interpretation . . . . .	45
6	<i>End User Evaluation</i> . . . . .	58
7	<i>IT Experts Evaluation</i> . . . . .	59
A.1	End-Users Evaluation . . . . .	72
A.2	IT Experts Evaluation . . . . .	73

## LIST OF FIGURES

<b>Figure</b>	<b>Title</b>	<b>Page</b>
1	IPO Model . . . . .	14
2	A chromosome with 3 communities and 2 shelters . . . . .	24
3	Selection process where probability is based on their fitness value. . .	25
4	Crossover process where parents generate a new offspring . . . . .	25
5	Mutation process where a value is randomly altered . . . . .	26
6	A representation of an Agile approach . . . . .	27
7	Gantt Chart . . . . .	28
8	System Architecture . . . . .	31
9	The ERD Schema . . . . .	32
10	10-point numerical rating scale . . . . .	44
11	Dashboard . . . . .	49
12	Community Management . . . . .	49
13	Shelter Management . . . . .	50
14	Model Parameter Settings . . . . .	51
15	Progress Dialog . . . . .	52
16	Report Dialog . . . . .	52
17	Solve Settings . . . . .	54
18	Input Password Popup . . . . .	55
19	Community to Shelter Paths . . . . .	56
B.1	Genetic Algorithm . . . . .	77
B.2	Genetic Algorithm - Selection . . . . .	78
B.3	Genetic Algorithm - Crossover . . . . .	79
B.4	Genetic Algorithm - Mutation . . . . .	80
B.5	Data Modification Feature . . . . .	81

B.6	Model Modification Feature . . . . .	82
B.7	Data Simulation Feature . . . . .	83
B.8	Shelter Tagging Feature . . . . .	84
B.9	Report Protection Feature . . . . .	85

## LIST OF APPENDICES

<b>Appendix</b>	<b>Title</b>	<b>Page</b>
A	Evaluation Results	71
B	System Flow Chart	76
C	Relevant Codes	86
D	Letters	93
E	Instruments	102

## **CHAPTER I**

### **THE PROBLEM AND ITS BACKGROUND**

Addressing the shelter issues in Bulacan is the focus of this research. This chapter highlights the background and significance of the study. Additionally, the key points and objectives of the study are discussed along with the study's scope and limitations.

#### **Background of the Study**

The Philippines experiences typhoons, earthquakes, and volcanic eruptions each year, leaving people vulnerable and displaced because the country is situated within the Pacific Ring of Fire and directly in the path of the typhoon belt in the Pacific Ocean. Bulacan itself has faced severe impacts from typhoons, including Typhoon Ondoy in 2009 which affected over 250, 000 families and claimed nearly 100 lives (Mananghaya, 2009). For instance, typhoon Haiyan, also known as Super Typhoon Yolanda, devastated the nation in 2013 and displaced over 4 million people, exposing severe shortcomings in the Philippine shelter allocation systems (Iuchi et al., 2019), highlighting the urgent need for efficient and responsive disaster management strategies. Despite ongoing efforts, the country continues to face significant challenges in shelter allocation, like overcrowding, resource distribution inefficiencies, and poor accessibility.

Overcrowding remains a persistent issue, with many shelters operating beyond their intended capacity, leading to unsafe and unsanitary conditions. Accessibility problems further worsen the situation, as shelters are often located at distances difficult for affected individuals, particularly those in rural or remote areas, to reach due to poor infrastructure. Additionally, the inefficient distribution of resources like food, water, and medical supplies results in shortages and uneven support across shelters. Compounding these issues such as disaster preparedness team do not use

data-driven decision-making increasing the likelihood of making incorrect decisions highlights the data and planning gaps that hinder effective decision-making and timely shelter assignments. This emphasizes the need on developing innovative approaches to improve shelter allocation in disaster preparedness.

The concept of shelter allocation has been a critical aspect of disaster management throughout history, when communities would seek refuge in caves or fortified structures during emergencies. However, formalized shelter allocation strategies emerged in the 20th century with the rise of civil defense measures during World War II, where air raid shelters were established in urban areas. These air raid shelters were used to ensure the safety of the population of Europe because of the civil casualties and weakening of their social and military morale, as seen in London, Berlin, and Paris (Flebus, 1941; Shakibamaesh, 2015). Post-war, shelter allocation evolved in response to natural disasters, and humanitarian organizations developed temporary shelters for displaced populations. Later, in 1970 in Bangladesh, the inadequacy of early efforts became evident during the Bhola cyclone, which led to numerous deaths. A study showed that people lacked access to information about the cyclone warning and that appropriate shelters were rare, resulting in a devastating 300,000 fatalities, with some estimates being even higher and an estimated 4.8 million people were affected by the cyclone due to the lack of effective shelter allocation. (Miyaji et al., 2020)

Shelter allocation refers to the process of assigning displaced communities to available shelters during disasters (Yin et al., 2023). While shelter location-allocation, focuses on determining shelter would be constructed, and then be used for displaced population (Zhao et al., 2019). These process is crucial to disaster prevention and mitigation, ensuring the safety and well-being of affected populations by providing secure, accessible, and adequate temporary shelters. Effective shelter allocation involves considerations such as shelter capacity, proximity to disaster sites, and the

specific needs of vulnerable communities.

Over the years, strategies have evolved from reactive measures to a more systematic approach incorporating modern technologies and methodologies, highlighting the increasing importance of structured and efficient shelter allocation. However, these challenges, particularly in developing countries like the Philippines, where limited infrastructure hinders its effective implementation.

This study proposes a data-driven solution ensuring an effective and feasible implementation of shelter allocation. This would be by developing a decision support system using a genetic algorithm (GA), a computational method inspired by natural selection and evolution, to address the inefficiencies in shelter allocation. GA optimize solutions by mimicking the process of evolution such as selection, crossover, and mutation, to identify best outcome. Mathew (2012) discussed that these algorithms represent potential solutions to a given problem using a basic chromosome-like data structure and employ recombination operators to maintain essential information, making it ideal to solve wide variety of problems. In shelter allocation, GA can optimize the assignment process by simultaneously considering factors such as shelter capacity, location, and accessibility. This approach aims to minimize overcrowding, improve resource distribution, and enhance overall efficiency in managing shelters during disasters.

Given the Philippines' frequent exposure to natural disasters, implementing a shelter allocation system is essential. Calumpit, Bulacan was chosen for its high vulnerability to flooding since it has been a catch basin of floodwaters from their neighboring areas. Despite the multitude of studies formulating models to address the shelter location-allocation problem, there remains a lack of system integration. This gap makes it difficult for decision-makers, particularly those unfamiliar with the mathematical models proposed in various studies, to apply them effectively in their decisions. This study is dedicated to developing a programmed system that uses

genetic algorithm to address the challenges experienced in the Philippines, focusing on Calumpit, Bulacan. The proposed shelter location-allocation system has the potential to significantly improve disaster response efficiency, and enhance safety for displaced individuals. The insights gained from this study could be applied to other municipalities facing similar challenges, contributing to the national effort to strengthen disaster resilience.

### **Statement of the Problem**

This study aims to address the shelter allocation problem for the municipality of Calumpit, particularly during disaster situations such as storm surges and flash floods. The primary challenge is how to develop a decision support system integrating a model that solves location-allocation problem to ensure that victims are allocated to shelters in an optimal manner. Specifically, the paper aims to solve the following questions:

1. How can the proposed system be developed featuring the following functionalities:
  - 1.1 Data Modification,
  - 1.2 Model Modification,
  - 1.3 Data Simulation,
  - 1.4 Shelter Tagging, and
  - 1.5 Report Protection?
2. What is the optimal shelter location-allocation plan for the municipality of Calumpit?
3. How acceptable is the proposed system based on the criteria defined in Technology Acceptance Model?

- 3.1 Perceived usefulness,
  - 3.2 Perceived ease of use,
  - 3.3 Attitude towards using, and
  - 3.4 Behavioral intention?
4. How well does the proposed system meet the ISO / IEC 25010 requirements?
- 4.1 Functional Suitability,
  - 4.2 Performance Efficiency,
  - 4.3 Compatibility,
  - 4.4 Interaction Capability,
  - 4.5 Reliability,
  - 4.6 Security,
  - 4.7 Maintainability, and
  - 4.8 Flexibility?

### **Significance of the Study**

The research seeks to improve disaster preparedness by providing a program and a model that facilitates more efficient decision-making and optimizes shelter placements regarding accessibility, cost-efficiency, and community proximity. The proposed solution has the potential to significantly reduce the risks associated with natural disasters in that area and enhance the overall management of shelter allocation and emergency resources.

The resulting shelter location-allocation from this project will primarily benefit the citizens of disaster-prone areas in Calumpit. This leads to faster evacuation times for use in the welfare of its citizens. The resulting optimization of shelter locations also extends to the efficient use of financial and logistical resources, minimizing the

costs required in the maintenance and operation of shelters, thus allowing reallocation of previously spent resources into other areas.

By providing insights into optimized shelter locations and evacuee distribution, this project seeks to benefit the following parties:

**Local Government.** The local government of the target municipality is a beneficiary of this project due to being responsible for disaster management and response within their jurisdiction. The administration of the affected municipalities' LGU would achieve a system that will assist in the evacuation and protection of citizens and thus may divert their attention elsewhere into other areas.

**Communities.** The local communities within Calumpit that are directly affected by disasters, especially floods, are important beneficiaries of this project. The community would achieve faster response times, shelters that are located in optimal positions that take into account their homes and workplaces, and more systematic procedures in evacuation.

**Future researchers.** Future researchers are a beneficiary due to this project being open to the public and thus, researchers and developers may derive their own thesis projects that are similar for use in different areas of the Philippines.

### Scope and Delimitations

This thesis will be limited only on identifying and assigning evacuation shelters, referred to as shelter location-allocation. This is geographically limited on Calumpit due to being the most affected municipality in Bulacan on typhoons. However, this study can be applied to other disaster-prone areas with some adjustments, which will not be covered in this thesis. Moreover, the system will use Bilevel No Transfer model through Genetic Algorithm only.

The thesis will utilize real-world information from Calumpit, including existing shelter locations and geographic layouts, as well as cost estimates for shelter maintenance and other operations. This data will be acquired by the researchers with the help of the local government units of Calumpit.

In technical aspect, the proposed system is limited to the Windows operating system (OS) due to its accessibility and familiarity among the general population. Additionally, Windows provides a stable environment and robust support for applications, further justifying its selection as the target OS for the proposed system.

The project is limited to a 10-month period wherein all stages of the thesis and consequent testing must be completed. Updates on data, and project maintenance beyond this period will not be covered by the researchers.

## CHAPTER II

### THEORETICAL FRAMEWORK

Over the years, different types of models have been developed for shelter location-allocation to support evacuation efforts, each with distinct objectives and often integrated with programming. This chapter delves into key theories in modeling and system integration that inform the development of effective shelter location-allocation systems. Moreover, comprehensive review of related literature is conducted, analyzing and synthesizing existing studies to highlight their relevance, explore the current models, and identify areas where system features are lacking.

#### **Related Theories**

The development of shelter location-allocation system draws on key theories which feature the optimization of shelter location-allocation, development, and assessment of the system.

#### *Operations Research*

Mathematical modeling is an approach to represent a real-life problem and solving them using mathematical techniques such as the operations research. This theory addresses the optimization of objectives, crucial in shelter location-allocation where factors like distance and cost must be balanced. The problem is modeled to find the optimal locations while minimizing travel distances and associated costs, making it ideal for a multi-objective optimization.

#### *Theory of Evolution*

Inspired by Charles Darwin's theory of evolution, evolutionary algorithms such as genetic algorithms simulate natural selection within code to solve complex optimization problems effectively. This approach is widely used due to its robustness and adaptability, hence it was applied to solve the multi-objective model for shelter

location-allocation.

### ***Decision Theory***

Decision theory is a study of having a rational choice by using models and tools. This involves creating a system that serves as a decision support tool for decision-makers, such as the DRRMO, in allocation of shelters. It features user-defined parameters for model customization and provides functionality for creating, reading, updating, and deleting data.

### ***Technology Acceptance Model (TAM)***

TAM was developed by Fred Davis in 1989 and is widely used to assess the acceptability of a digital product. This model is primarily based on two fundamental determinants: users' perceived usefulness and perceived ease of use. This model was used to assess acceptability of the proposed system with the cooperation of potential end users.

### ***Software Product Assessment Framework (ISO 25010)***

ISO 25010 provides standards for assessing software quality, covering aspects such as functionality, usability, reliability, and efficiency. This framework guided the evaluation of the proposed system, ensuring it meets high-quality standards.

## **Review of Related Literature and Studies**

This section compiles related literature that strengthens the foundation of our research. This includes an overview of Bulacan's vulnerability to natural disasters, as well as a review of existing shelter location-allocation models featuring various types and objectives. Additionally, it highlights the gap in system integration, highlighting the need for a comprehensive decision support system for effective disaster response.

***Bulacan is vulnerable in disasters***

One of the most devastating typhoons to hit the Philippines was Typhoon Ondoy. According to Managhaya's report, it claimed nearly 100 lives and affected around 250,000 families. Large parts of Luzon suffered significant damage, including Bulacan, resulting in heavy flooding. (Mananghaya, 2009)

According to a report by Reyes-Estrope covering Typhoon Fabian in 2021 (Reyes-Estrope, 2021), heavy rainfall caused by the southwest monsoon and Typhoon Fabian resulted in flooding across 35 villages in Bulacan, including Calumpit. The water level of the Angat Dam rose to 185.72 meters above sea level during this event. Moreover, Gozum's report on Typhoon Egay in 2023 (Gozum, 2023) emphasizes the hardships faced by flood victims in Bulacan. The province was declared under a state of calamity due to Typhoon Egay, which affected over 200,000 families and forced many residents to evacuate.

***Existing shelter location-allocation models***

The allocation of different resources during each evacuation phase is critical, however, this is often delayed, either due to extenuating circumstances or simply lack of a system. Therefore, optimization is a must. In this section, the paper introduces different models with varying solving techniques to solve each of their own objectives.

In disaster management, the organization of effective evacuation is important. Wang and Xu (2022) address the challenge of determining optimal shelter locations and evacuation routes, integrating methods such as the normal distribution, analytic hierarchy process (AHP), and ordered weighted aggregation operator (OWA); These approaches that have assigned subjective scores and initial weights to critical attributes significantly advances shelter location models for disaster response.

Different studies also features levels of shelters which introduces a hierarchy of shelters, each with different needs that they fulfill and with various requirements to

be assigned a level. Therefore the levels of each shelter must be taken into account, and this segment of system requires the use of hierarchical optimization.

Ma et al. (2019) show the importance of site selection models in disaster scenarios, particularly highlighting the application of bilevel programming, a hierarchical optimization method first introduced by H.v. Stackelberg in 1934. The methods used are applied to different complex location problems, such as the p-median and p-center problems, which are crucial for the distribution of resources during emergencies.

Building on the hierarchical approach, Zhao et al. (2019) applied a hierarchical model for shelter location and evacuee allocation, distinguishing between emergency shelters (EMS) and long-term shelters (LTS). Combined with an optimization algorithm, their model facilitates the selection of EMS locations from a pool of candidates, ensuring the initial allocation of evacuees. Over time, evacuees transitioned from EMS to LTS in a structured and efficient manner, highlighting the practical advantages of hierarchical models in emergency management.

In a different study created by Ma et al. (2019), the paper exposes various models to best represent a shelter location-allocation problem, Single-Objective, Multi-Objective, and Hierarchical models. These were compared for the objectives that were maximized and minimized, and then introduced different algorithms that may be used to solve them.

Locally, according to a published thesis in University of the Philippines(UP) Diliman, there exists 4 shelter location-allocation models; BNST, BST, BNT, and WORK models that are solved using binary genetic algorithms. These answer the optimization of allocation in shelters based on the cost, distance, workplace, and the hierarchy of shelter. This study was applied to the area of Talisay in Batangas using simulated data for shelter information.

A study similar to the thesis has been published locally, however this study

answers the optimization of COVID-19 vaccination site allocations (Cabanilla et al., 2021). This study features assigning and identifying shelters to be a vaccination sites considering its distance across all barangay.

### ***Optimization Technique by Genetic Algorithm***

Since the optimization of shelter location-allocation requires multiple iterations to test and figure out what is truly optimal, one method of solving this is through the use of genetic algorithms.

Genetic algorithm, a powerful optimization technique inspired by the process of natural selection, is particularly well-suited for tackling complex problems like shelter location allocation. Multi-Objective Genetic Programming (MOGP) emphasizes the importance of semantic diversity and that methods like Pivot Similarity Semantic-based Distance outperform traditional approaches by enhancing solution quality and diversity, according to a study by Galvan and Stapleton (2020).

Numerous published studies and theses highlights allocation models and solved by genetic algorithm. From UP Diliman, Manongas (2021) solved their model using Binary Genetic Algorithm. Additionally, a study made by Maghawry et al. (2020) which proposes a Hybrid Genetic Algorithm (HGA) in optimizing multi-objective problems. Yin et al. (2023) exposed formulation of shelter allocation models, and solved by using Improved Quantum Genetic Algorithm (IQGA).

### ***Lack of System Integration***

The referenced articles each exposed models with various objectives. However, none offer a fully implemented system for practical use by disaster-response teams. This gap highlights the need for a comprehensive decision support system that integrates these models and enables real-time decision-making and adaptability in disaster situations. While the following articles propose a system, they remain incomplete and require further development.

In the study of Lomer et al. (2023), the researchers are claiming that the group has created a system, which features risk-based decision that affects the output. The paper, however, did not show the system structure nor the system itself. Moreover, they did not show any acceptability measures.

The paper of Cavdur and Sebatli (2019) proposes the use of a decision support tool for the allocation of temporary disaster-response facilities while under the effects of demand uncertainty. The study also develops a database for storing disaster and shelter details to support disaster operations. This system closely aligns with this thesis, as it addresses shelter allocation and provides decision-making assistance for disaster-response teams. However, the study lacks any measures for evaluating system acceptability and has room for improvement, as the system design is also outdated.

### Synthesis of the Review

Overtime, the researchers have reviewed and analyzed multiple academic literature and studies that relate to the thesis. These range from literature and studies that cover different areas using differing allocation techniques as well as other formulae and algorithms that may be used in the thesis. However, a large amount of this literature and studies lack a system or other feature that is partly required for the usability of end-user. By studying these collected pieces of literature, the researchers aim to create a programmed system with enough improvements from the previous studies presented. Moreover, this thesis based the models from the published paper from UP Diliman by Manongas (2021), with an improved algorithm.


### Conceptual Framework

This section provides an Input-Process-Output framework (IPO) as a basis for conceptual framework outlining the development and implementation of Shelter Location-Allocation System for Calumpit, Bulacan. The IPO model was first introduced in the context of computer programming and documentation using the

Hierarchy plus IPO (HIPO) technique. Moreover, the concept of input and output has been used before in economics, back in the 1930s, Wassily Leontief first conceptualized input-output analysis to illustrate economic interrelationships. Figure 1 shows the IPO framework for this thesis.

**Figure 1**

*IPO Model*

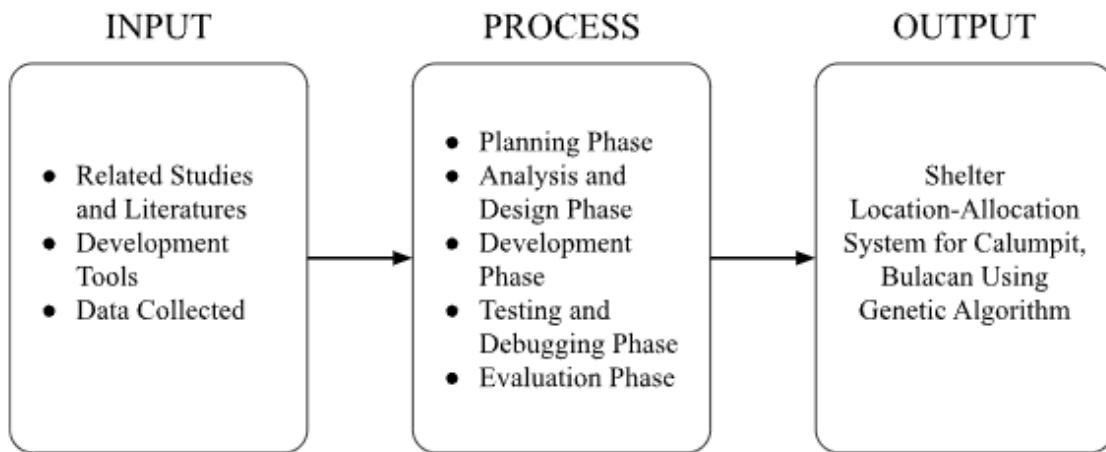

The inputs for this project include related studies and literature, which provide a foundation for selecting and adapting an appropriate model for our system. These resources were analyzed and synthesized to establish a strong foundation in conducting this project. The researchers also needed to gather software and hardware requirements, such as compatible Windows versions and system prerequisites, to ensure a smooth development process. Additionally, real data from Calumpit, Bulacan, specifically community and shelter information, were essential for testing the system.

The process begins with planning, where the researchers outline the objectives and approach for building the system. Once a clear plan is established, the researchers proceed to analysis and design, which involves creating mock-up designs, an ERD schema, and process flows to help developers visualize the system structure.

Development phase is the longest phase, involving both frontend design and backend coding using the Qt framework. Once developed, the system has undergone rigorous testing to identify and correct any errors or anomalies, which are then debugged and resolved. Finally, the system was evaluated through a survey based on the ISO 25010 criteria to assess its acceptability.

The expected output is a fully functional decision support system(DSS) that incorporates the model adopted using a genetic algorithm as the solving method. The researchers generated results showing the optimal shelter location-allocation for Calumpit using the developed system.

## CHAPTER III

### RESEARCH METHODOLOGY

This chapter outlines and expands upon the research methodology for the design and implementation of a shelter location-allocation system using a genetic algorithm for the optimization of shelter placement in disaster-prone areas. This methodology provides a systematic approach for a clear framework for system design, model implementation, and evaluation. Following this, data collection procedures are explained including the sources and techniques for gathering essential data on community demographics, geographic information, and shelter facilities.

Additionally, this chapter addresses the criteria for selecting, cleaning, and analyzing data, as well as the metrics used to evaluate the system's acceptability. Finally, ethical considerations such as data privacy are also discussed.

#### **Research Design**

The research design for this study is mixed-method applied research, this approach combines both quantitative and qualitative methods to provide a structured framework for development and evaluation of the shelter location allocation system.

#### ***Applied Research***

The applied research aspect of this study focuses on developing and implementing a practical solution for shelter location-allocation in real-world scenarios. The primary objective is to create a shelter location-allocation system using a genetic algorithm. This applied research approach aims to deliver a functional and reliable shelter location-allocation system that local government units (LGUs) and disaster response agencies can easily deploy and adapt. By emphasizing incremental progress and user-centered development, this ensures that the research outputs are directly applicable and beneficial to communities in disaster-prone areas.

### ***Quantitative Research***

The quantitative research component of this study aims to measure and analyze the acceptability of the proposed system using TAM determinants and ISO/IEC 25010 standard. The approach provided objective and measurable evidence to evaluate the system's usability, reliability, and overall quality performance. The quantitative methods quantify the use of genetic algorithms in the shelter location allocation system, providing valuable insights into the system's effectiveness for emergency management. Methods included collecting user feedback and performance metrics through structured surveys and system testing to assess these attributes. The survey has gauged user satisfaction with system usability and functionality using a 10-point rating scale, providing quantifiable insights into the system's ease of use and accessibility. Incorporating quantitative research in this study is justified as it can provide empirical evidence supporting the shelter allocation system's acceptability.

### ***Qualitative Research***

The researchers used qualitative research to understand the current issues of shelter location allocation from the stakeholders' perspectives. This approach requires engaging with the LGU offices to identify the additional requirements for the system. This ensured that the development of the shelter location-allocation system addresses real-world challenges and support those involved in evacuating communities during natural disasters and be of acceptable quality. The researchers has conducted an interview to achieve this. The interview was based on Decision Thinking Framework which is a common framework for developing a product. This was chosen to provide a structured way to gather detailed feedback from the stakeholders about their experiences, challenges, information about the shelters, and expectations regarding shelter location-allocation and this study. This method allows the researchers to collect various opinions and insights, which is important for understanding the

complex issues involved in disaster management and shelter allocation. This insight is important for ensuring the system's effectiveness, as it helps identify the challenges to ensure the proper functioning of the shelter location allocation system and meet the needs of the affected communities. By capturing these detailed perspectives, the system is more practical, user-friendly, and responsive to the real-world needs of disaster management.

### **Model Adoption**

The model adopted for this study is the Bilevel No-transfer (BNT) Model, which solves the shelter location-allocation problem under disaster scenarios. As discussed in a published paper by Manongas (2021), this model is effective when it assigns communities to shelters without allowing transfers between different shelter levels during recovery. Using the BNT Model, the researchers can optimize the allocation of communities to shelters, accounting for each shelter's capacity and travel distance for evacuees. The BNT Model includes a two-tiered shelter structure, consisting of level 1 and 2 shelters. Level 1 shelters are smaller facilities intended for immediate use, providing basic services for short-term stays. In contrast, Level 2 shelters are significantly larger and equipped with comprehensive services, including private rooms and extended support amenities, these shelters are intended for longer-term stays. However, once assigned to a shelter in the BNT Model, evacuees remain in that shelter until the disaster subsides, eliminating the need for transfers between shelters. The objective function for the BNT model can be expressed as follows:

Minimize

$$wt_{dist} \sum_{j=1}^N \sum_{i=1}^M d_{ij} P_i x_{ij} + wt_{cost} \sum_{k=1}^2 \sum_{j=1}^N C_j^{(k)} y_j^{(k)} \quad (3.1)$$

The constraints of BNT model include the distance, capacity, assignment, and binary constraints, each of which plays a crucial role in ensuring the model functions effectively under the disaster response scenario. These constraints subject to the

following:

*Distance Constraint.* Equation 3.2 ensures that each community is allocated to a shelter within a defined maximum distance.

$$d_{ij}x_{ij} \leq D_i, \forall i = 1, \dots, M, \forall j = 1, \dots, N \quad (3.2)$$

*Capacity Constraint.* Equation 3.3 guarantees that the total number of evacuees assigned to a shelter does not exceed its maximum capacity.

$$\sum_{i=1}^M LP_i x_{ij} \leq \sum_k Area_j^{(k)} y_j^{(k)}, \forall j = 1, \dots, N, k = 1, 2 \quad (3.3)$$

*Assignment Constraints.* Equations 3.4 and 3.5 ensures that the total assigned shelters and level 2 shelter does not exceeds over the user defined parameters respectively. Equation 3.6 ensures that every community is assigned to exactly one shelter. Equation 3.7 ensures that the assigned shelter does not duplicate like being opened as level 1 and level 2 at the same time. This prevents problems in shelter allocation and ensures that each community has a designated place.

$$\sum_{k=1}^2 \sum_j = 1^N y_j^{(k)} \leq MaxSh \quad (3.4)$$

$$\sum_j = 1^N y_j^2 \leq MaxL2 \quad (3.5)$$

$$\sum_{j=1}^N x_{ij} = 1, \forall i = 1, \dots, M \quad (3.6)$$

$$\sum_{k=1}^N y_j^{(k)} \leq 1, \forall j = 1, \dots, N \quad (3.7)$$

*Binary Constraint.* Equation 3.8 ensures that the model only takes binary variable, where can either be true (1) or false (0)

$$x_{ij}, y_j^{(1)}, y_j^{(2)} \in \{0, 1\}, \forall i = 1, \dots, M, \forall j = 1, \dots, N \quad (3.8)$$

where:

- $wt_{dist}$  weight given to the distance cost.
- $wt_{cost}$  weight given to the fixed shelter cost.
- $M$  total number of communities.
- $N$  total number of potential shelter locations.
- $d_{ij}$  distance between shelter  $i$  and community  $j$ .
- $P_i$  population of community  $i$ .
- $C_j^{(k)}$  fixed cost for establishing shelter  $j$  of level  $k$ .
- $x_{ij}$  binary decision variable indicating if community  $j$  is assigned to shelter  $i$ .
- $y_j^{(k)}$  binary decision variable indicating if shelter  $j$  of level  $k$  is opened.
- $L$  area allotted per individual.
- $D_i$  maximum distance that community  $i$  can be traveled.
- $Area_j^{(k)}$  area of shelter  $j$  of level  $k$ .
- $MaxL2$  maximum number of level 2 shelters to be opened.
- $MaxSh$  maximum number of shelters to be opened.

### ***Feasibility Conditions***

Checking if a solution exists based on the user defined parameters is a must in developing the system thus conducting feasibility checks before executing the algorithm. This adds a feature that allows users to view if their inputs are incorrect having an additional functionality and capability of the system.

The following conditions should satisfy else no solution exists:

$$Area_j^{(2)} \geq Area_j^{(1)}, \forall j = 1, \dots, N.$$

This condition checks if shelter j area for level 2 is greater than or equal to their area for level 1.

$$MaxL2 \leq MaxSh.$$

This condition checks if the user defined number of maximum level 2 shelters is less than to number of maximum shelters.

$$\exists j \in d_{ij} \leq D_i, \forall i = 1, \dots, M.$$

This condition checks if there exists a distance from community i to all shelters that is less than or equal to its max distance.

$$\exists i \in LP_i \leq Area_j^{(2)}, \forall j = 1, \dots, N.$$

This condition checks if there exists a level 2 shelter that could accommodate a community i by their population multiplied by the area allotted per individual.

$$\sum_{i=1}^M P_i \leq L \sum_{j=1}^N Area_j, \forall i = 1, \dots, M, \forall j = 1, \dots, N.$$

This condition checks if the total population is less than or equal to the total area of shelters multiplied to area allotted per individual. If this fails, then it is theoretically impossible to allocate all individuals given with their shorted capacity of shelters.

Incorporating these feasibility conditions ensures that the model produced at least one feasible solution, and the system proceeds only with valid input configurations. By verifying these conditions, users receive instant feedback on

whether their inputs are valid, allowing the model to proceed with solving. These conditions represent key feasibility checks but are not exhaustive, and infeasible solutions may still persist. An additional feature would employ a penalty function that would transform the model to an unconstrained model.

### ***Penalty Function***

The penalty function was used to handle the problem constraints. Instead of discarding infeasible solutions or chromosomes, they are assigned a very large objective value making them not fit to be a solution. The type of penalty to be used is the Courant-Beltrami penalty function method, as shown in equation below.

$$h(x) = (g^+(x))^2$$

where

$$g^+(x) = \max\{g(x), 0\}$$

where  $g(x)$  is a constraint function of the form  $g(x) \leq 0$ .

The new objective function would be adding the initial objective value  $f(x)$  to the penalty multiplied by some constant  $\gamma$ .

$$f_{new}(x) = f(x) + \gamma \sum_{i=1}^n (\max\{g_i(x), 0\})^2$$

where  $g_1(x), g_2(x), \dots, g_n(x)$  are the constraints of the model of the form  $g_i(x) \leq 0$ , and  $\gamma \in \mathbb{R}^+$  is sufficiently large, where for this thesis is set to  $10^{20}$ . The penalty would add up to the objective value for each constraints it violated, otherwise it would not affect the objective value.

### ***Optimization Technique***

In a study created by Mathew (2012), Genetic Algorithms are based on the concept of natural selection and evolves possible solutions through operators such as selection, crossover, and mutation. This algorithm iteratively evolved a population of potential solutions, utilizing operations to explore the population space and gradually converge toward an optimal solution.

The BNT model was originally solved using Binary Genetic Algorithm implemented in MATLAB. However, since system integration was conducted on this thesis, the model has been solved using Integer-based Genetic Algorithm implemented in Python. This decision derived for satisfying the assignment constraint of the model, and Python being a well suited programming language for both data simulation and system development.

The researchers start by defining some terms of genetic algorithm that are used in the context of shelter location-allocation model.

*Chromosome.* An array or dictionary which represents the solution in a problem. A chromosome is composed of two parts, community allocation and shelter level. Community allocation refers to assigning shelter index to communities, and shelter level refers to assigning a value of 1 or 2 to represent as level to shelters. Figure 2 shows a solution where community 0 was allocated to shelter 0, and community 1 and 2 was allocated to shelter 1. Additionally, shelter 0 was assigned as level 1, and shelter 1 was assigned as level 2.


*Population.* A group of chromosomes. This refers to a group of generated solutions on the problem that will be later on picked or selected.

*Generation.* A whole iteration process of genetic algorithm. This refers to the population on a certain generation which in theory, higher generations then the closer the user gets to the optimal solution.

*Fitness.* A value generated from the objective function. This refers to the

**Figure 2**

*A chromosome with 3 communities and 2 shelters*

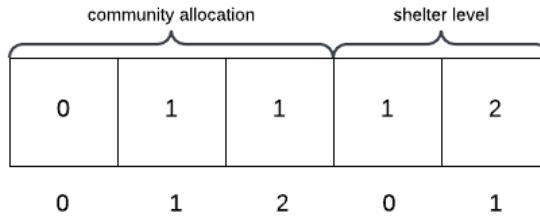

objective value of a chromosome based on the implemented model.

A genetic algorithm is composed of three key components: selection, crossover, and mutation. Each serves a distinct purpose in addressing optimization problems and simulates the evolution theory. Each component has various implementation methods tailored to specific objectives. (Wirsansky, 2020)


*Selection.* A process of selecting parents. This refers to selecting two chromosome based on their fitness value. The proposed system uses Roulette Wheel Selection, which is the likelihood of a chromosome to be selected is directly proportional to its fitness value. Figure 3 shows that the probability is inversely proportional to the fitness value, since the researchers aim to minimize the objective. Moreover, a randomizer will select a chromosome based on the computed probabilities.

*Crossover.* A process of breeding and giving offspring by a two parents. This refers to combining two selected chromosome values and generating a new chromosome based on the combined values. The proposed system uses Uniform Crossover, which all the values from two parents has a chance to be inherited by the offspring. Figure 4 shows a generated offspring with values based on their parents. Notice that if a value is different between parents, a randomizer will decide which value would be chosen.


*Mutation.* A process of altering some chromosome values. This refers to randomly selecting a chromosome from a population based on a predetermined mutation rate, then changing some of its values. The proposed system uses Random

**Figure 3**

*Selection process where probability is based on their fitness value.*

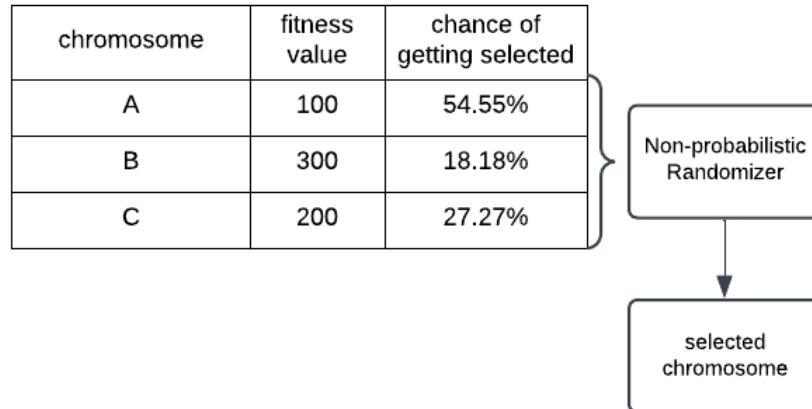**Figure 4**

*Crossover process where parents generate a new offspring*

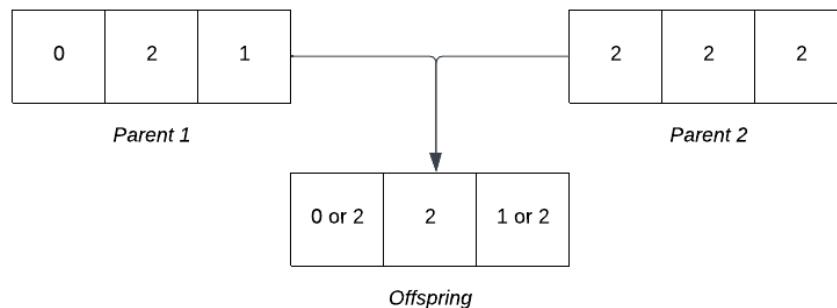


Reset Mutation, which picks randomly from a selected chromosome values, then changing it by generating a new random number. Figure 5 shows altering of a chromosome for the second community by a randomizer, allocating from shelter 1 to shelter 2.

By applying these evolutionary principles, the genetic algorithm can efficiently navigate the large and complex problem space of shelter allocation, ensuring the most effective distribution of evacuees to shelters based on the model's constraints and objectives.

**Figure 5**

*Mutation process where a value is randomly altered*

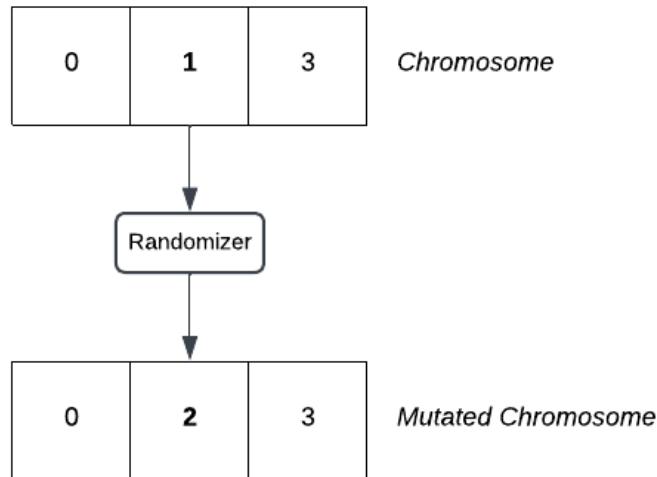


### Process of Developing the System

This study employed a structured system development methodology following the Agile approach. Agile was chosen for its flexibility and iterative nature, which allows for continuous refinement and adaptation of the system based on feedback and testing results. Each development phase—planning, design, implementation, testing, and deployment—includes regular reviews and adjustments to ensure the system evolves effectively to meet technical and user needs. The system development process was divided into several distinct phases, each of which is designed to build upon the previous stage, ensuring a comprehensive and systematic approach. As shown in Figure 6 originally illustrated by Jayathilaka (2020)

#### ***Planning***


In the initial phase, the researchers outlined the shelter location allocation system's scope, objectives, and requirements. This process identifies the key features and functionalities essential for the system. Additionally, this phase includes the

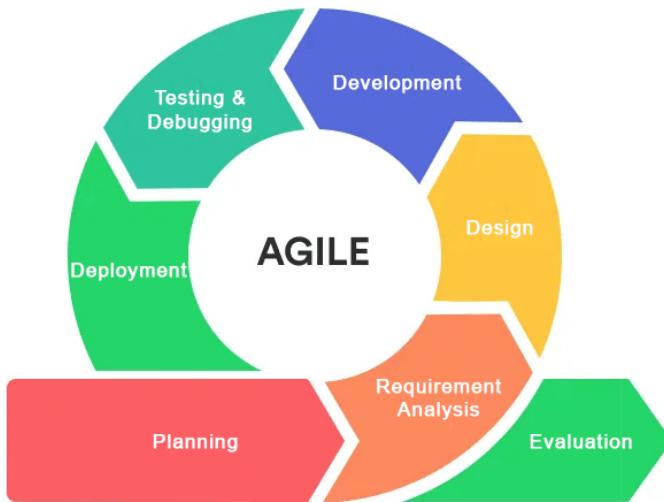**Figure 6***A representation of an Agile approach*

thesis project plan, which details the project timeline. The Gantt chart outlines the phases of the thesis project, including thesis one output, thesis two output, data collection and preparation, paper miscellaneous, system design, system development, and system assessment. Each phase addresses specific objectives that contribute to completing the shelter location-allocation system. The Gantt chart is shown in Figure 7.

**Thesis One Output:** This phase involves drafting the initial sections of the thesis, such as the overview, rationale, scope, and significance, along with Chapters one through three (Introduction, Review of Related Literature, and Methodology). Additionally, this phase includes preparing the proposal manuscript, slides, and script for the mock defense and proposal defense. Parallel to this is the Paper Miscellaneous, which includes the creation of the literature review matrix to organize and support the contents of Chapter 2. This approach maintains a well-structured reference base for literature review.

**Figure 7**  
*Gantt Chart*

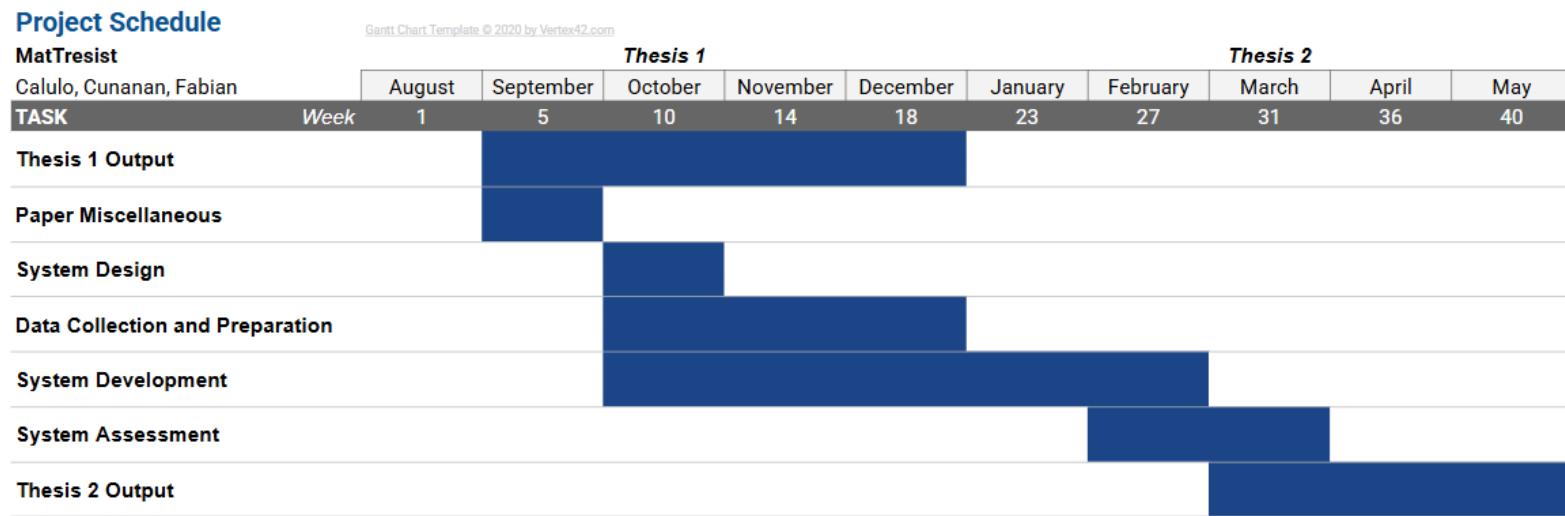

**Thesis Two Output:** Following the foundational work in the first thesis phase, this continues the development of this thesis document, focusing on Chapters 4 and 5 (Results and Conclusions) and preparing for the mock defense and final thesis defense. This phase signifies the completion of the thesis writing process.

**Data Collection and Preparation:** This critical phase entails gathering data required for system design and important data for the genetic algorithm. Tasks include submitting documents to the LGU, presenting the project proposal, conducting client interviews, and collecting online and onsite data.

**System Design:** This phase focuses on planning the technical aspects of the shelter allocation system, including genetic algorithm implementation, user interface design, entity relationship diagram, and flowchart development. These elements form the blueprint that guides the system's development.

**System Development:** The project's core phase involves the actual construction and coding of the system. Tasks include front-end development, data and model integration, dashboard creation, and implementing security features. This phase also includes testing and debugging to ensure system functionality.

**System Assessment:** The final phase, along with Thesis Two Output, is evaluating the system's acceptability and user satisfaction. Activities include preparing and distributing surveys, gathering user feedback, encoding and analyzing this data to assess system acceptability.

### *Requirement Analysis*

During the requirement analysis phase, researchers gathered comprehensive information about the system requirements by reviewing relevant literature that pertains to the thesis. Moreover, an interview with the client was conducted to know more about the current issues LGUs are facing regarding to evacuation. This phase ensures that all necessary features are identified and prioritized based on their importance.


The system's primary features and requirements encompass an overview of data and model modification, data simulation, shelter tagging, and report protection. Data modification includes an access to user for managing and modifying community and shelter data. Model modification allows users to change parameters on data simulation. Data simulation utilizes the community and shelter data as inputs for the genetic algorithm applied in the shelter location allocation system, optimizing the placement of evacuees in shelters. Furthermore, shelter tagging enables the categorization of shelters based on criteria such as location, capacity, and suitability for various disaster scenarios, thereby facilitating efficient resource allocation. Lastly, report protection allows user to protect their generated report to prevent leaks in a computer system.

### ***Design***

During the design phase, the researchers created a detailed outline for the shelter location-allocation system's architecture and key components. The design process includes creating a mockup of the system's user interface and constructing flowcharts, an entity-relationship diagram (ERD), and a data flow diagram(DFD) to map out system processes and data relationships. The researchers designed mockups to visualize the user interface, ensuring it met the user's needs for accessibility and usability. The flowcharts provided a step-by-step breakdown of system processes, while the ERD defined the data structures and relationships. These elements formed a cohesive blueprint to guide the system's development and ensure alignment with the requirements. Figure 8 shows the system architecture which combines DFD and the interaction of users.

The system architecture involves the interaction of two actors, the user of the system and disaster management team. The community and shelter data will be fed into a system which features data manipulation and shelter tagging. With the cleaned or finished data, data simulation may begin together with the model parameters

**Figure 8**  
*System Architecture*

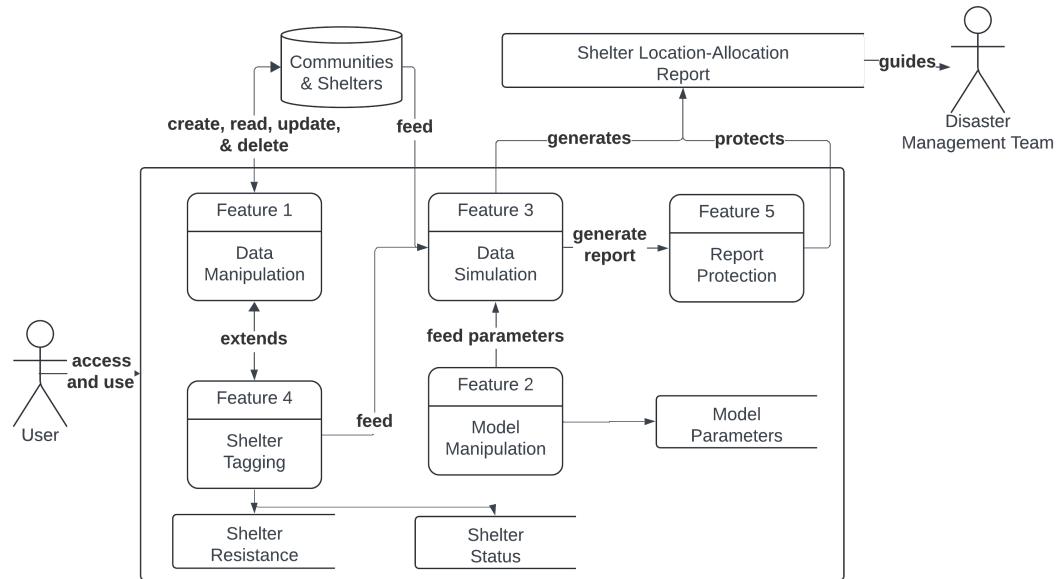

modified by the user. Finally, a report will be generated and can be protected or not. The report will be used by the disaster management team to guide them for decision making in allocation of residents to the correct shelter.


Figure 9 shows the entity relationship (ERD) which has 4 entities: Community, Shelter, Distance, and ModelParameters. Distances are derived from the location of Shelter and Community, then will be saved accordingly to be used in performing the system model. ModelParameters shows no relationship since it only saves the current settings for the model and algorithm.

A system mock-up was made showing the prototype of the system by designing the User Interface (UI) using a prototyping tool, Figma. The mock-up shows the UI for different modules of the system.

### ***Development***

The development phase includes coding and implementing the genetic algorithm for the shelter location allocation system. Utilizing the Agile system development

**Figure 9**  
*The ERD Schema*

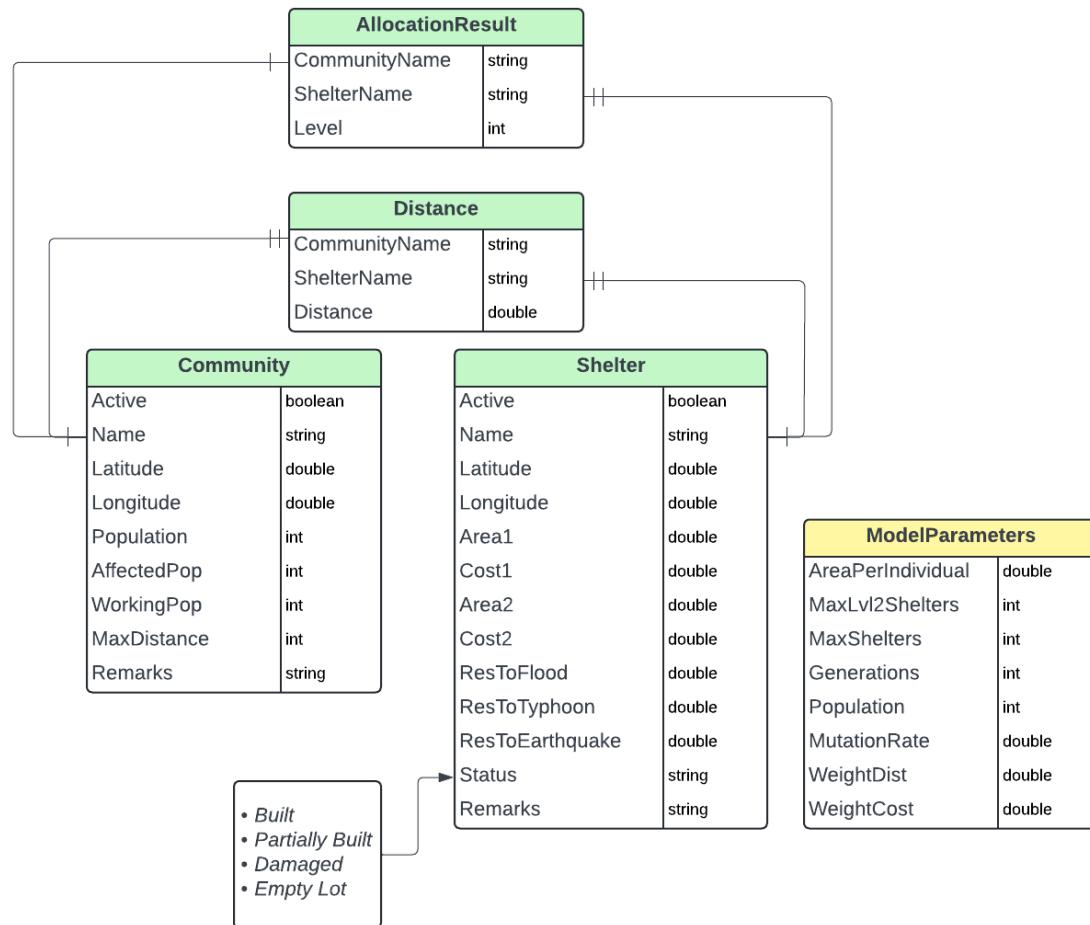

life cycle, which includes weekly meetings and development reviews, the team can ensure that development remains on track and that any issues are promptly addressed. By following the Agile SDLC, the researchers can adapt quickly to any changes in requirements, maintain clear communication, and address any issues promptly.

Table 1 shows the list needed to start the development process. The system was developed using Python programming language, and Qt framework to efficiently implement the graphical user interface(GUI) of the system. Visual Studio Code was utilized as the integrated development environment (IDE), and QtDesigner as an

extension for creating frontend designs by Qt framework.

**Table 1**

*List of tools and technologies used in the development process*

Name	Version	Description
Visual Studio Code	1.96.3	IDE for the whole coding and debugging process
Python	3.12.5	Programming language known for extensive computation libraries
QtDesigner	5.11.1	GUI design tool which has drag and drop feature
GitKraken	10.6.1	Git client that is user friendly for executing Git commands
GitHub	Web	Repository host which used for collaboration and backup of the project

Developing the proposed system using Python allows us to use Python libraries. As shown in Table 2, displays all the libraries used to develop the system. PySide6 is responsible for the GUI that uses the Qt framework. Pandas and openpyxl are used for handling data. Folium, OSMnx, networkx, and scikit-learn are for displaying and calculating the map shown in the system. Numpy is used for executing genetic algorithm. Additionally, msprintfcrypto-tool and XlsxWriter are used for report protect and lastly, pyinstaller for building the system.

### ***Testing and Debugging***

The system underwent functionality, performance, and reliability testing during the testing phase. The researchers employed manual testing techniques to identify and resolve any bugs or issues that arise. Any errors and anomalies found in the system are debugged and fixed. Through this thorough testing and debugging approach, the researchers ensure that the shelter location allocation system meets high quality, performance, and user satisfaction standards, making it ready for deployment.

**Table 2***List of libraries installed in Python*

Name	Version	Description
PySide6	6.7.2	Uses Qt framework for frontend development
pandas	2.2.3	Reads and handles datasets
openpyxl	3.1.5	Opens and reads excel files
folium	0.17.0	Provides visualization and interactivity on a geographical map
osmnx	1.9.4	Retrieves OpenStreetMap(OSM) data and could calculate road paths
networkx	3.3	Creates and computes complex graphs such as road networks
scikit-learn	1.5.2	Provides simple machine learning tools and functions
numpy	1.26.4	Generates non probabilistic numbers
msoffcrypto-tool	5.4.2	Encrypts and decrypts excel files
XlsxWriter	3.2.2	Edits and writes excel contents
pyinstaller	6.12.0	Compiles project file into an executable file

***Deployment***

During the deployment phase, the shelter location-allocation system underwent pilot testing in collaboration with local government units (LGUs). This process involved configuring the system, establishing the necessary data inputs, and training users to utilize the platform effectively. Additionally, the deployment phase is to continuously monitor the system's performance to ensure it operates efficiently and meets the objective of optimizing shelter locations.

Presentation of the application to the potential users, specifically the LGU of Calumpit include a walk-through tutorial covering all essential features. The users was provided with the information necessary to operate the app effectively, including an overview of its purpose, functionalities, and how to input relevant data. Specifically,

this includes entering shelter locations, population data, and accessibility metrics into the system to ensure accurate allocation results. Since a detailed explanation was provided during the system evaluation, this presentation focused on summarizing key points and addressing questions and feedback from the users.

### ***Evaluation***

Evaluation of the system includes preparing any distributing survey questionnaires based on TAM and ISO/IEC 25010 to our target sample. This phase ensured that the developed system has feedback from potential users as well as from experts in software engineering and development.

Feedback gathered from the potential users were important in identifying the areas for improvement. This feedback was collected through structured surveys and interviews to provide a comprehensive understanding of user needs and challenges. After the updates and adjustments to the application based on feedback to better align with users' needs, the new version of the application has been emailed to the LGU of Calumpit for operational use. This ensured that they have access to the latest features and improvements. It is important to note that this application is copyrighted by Bulacan State University to protect its intellectual property and ensure proper recognition to the researchers, developers, and thesis adviser. This copyright also prevents unauthorized commercial use and distribution, ensuring that the application remains a free resource for its intended purpose. It is not for sale.

### **System Preliminaries**

Developing a system requires careful planning and analysis before implementing it. A communication between the potential users or clients and the researchers is essential to ensure all system requirements are met and improved. This phase aims to establish a foundational understanding of current disaster-response processes, along with gathering essential data for the system. Interviews was conducted with

representatives from local government units (LGUs) specifically from the target population to understand their existing shelter allocation process, challenges, and expectations for a decision support system.

### ***Client Interview***

Conducting an interview with the client is essential to get to know with the potential users and the problems they are facing. Questions formulated are derived from Design Thinking Framework which is according to Pereira and de F.S.M. Russo (2018) has resulted in a greater approximation of end users and the development team who uses an Agile SDLC. This improves the quality and usability of the software.

### ***Data Gathering***

The model needed data to perform, specifically community and shelter data. Additionally, to ensure that the system produces outputs, data on shelters, disaster events, and typhoons were collected. This includes accessing records on past typhoon impacts, available shelter locations, and their respective capacities. Community or barangay data was sourced from publicly available databases, such as PhilAtlas, which provides detailed geographical and demographic information essential for accurate system modeling.

### ***Data Preprocessing***

The gathered information has undergone several stages. This ensures it meets the needs of the system and allows for an accurate assessment of its effectiveness.

All collected data were first cleaned to remove any inconsistencies, duplicates, or irrelevant information. This process is crucial for ensuring the data's quality and reliability, particularly for a system that relies on precision in both inputs and outputs. Any insufficient data was asked to the LGU to fill in the gaps of the datasets.

Table 3 presents all the data variables on communities and shelters used in the model, along with their respective sources. Affected population were derived from the

population of community which is based on the study of Opdyke et al. (2024) that states 12% of households intends to evacuate on public evacuation sites. Improvement or rehabilitation cost is added for costs, which are based on a report for improvement of an evacuation center from Department of the Interior and Local Government (2017, 2019) that costs approximately ₱7,700 per square meter. Meanwhile, data for Level 2 shelters are simulated, as the LGU does not have a data nor system for the hierarchy of shelters. The areas are assumed to be twice their initial size, and costs are estimated based on the contract cost of the Frances Evacuation Center, as detailed in the Department of Public Works and Highways (2025) and Department of the Interior and Local Government (2022) reports, resulting in approximately ₱60,000 per square meter.

Researches added empty lots across Calumpit to be appended to shelter data. These lots are identified and selected to be resistant to hazards, specifically floods with the assistance of Nationwide Operational Assessment of Hazards (NOAH) website. Table 4 shows the change of variables in area, cost, resistance and status for these appended shelter data. Additional cost is added due to property cost which according to Dot Property, approximately ₱12,500 per square meter was the average cost for land in Calumpit.

For justification of the target area's vulnerability, typhoon data spanning from 2006 to 2022 were examined. This dataset includes the number of affected and evacuated individuals across various municipalities in Bulacan. The data was grouped by municipality, summing the affected and evacuated residents over the specified period. This analysis helps justify the focus on the municipality and supports the rationale for the shelter allocation model's implementation in the municipality.

The cleaned shelter and community data were fed into the system to facilitate accurate shelter location-allocation modeling. The system will use these inputs to generate optimized shelter placement recommendations based on the model adopted.

**Table 3***Variables, Descriptions, and Sources for Community and Shelter Data*

Variable	Source	Description
<i>Community</i>		
Name	LGU interview	Identity of a community
Longitude	Google Map & LGU interview	Longitudinal coordinates
Latitude	Google Map & LGU interview	Latitudinal coordinates
Population	Philippine Atlas (2020 population)	Number of individuals living in a community
AffectedPop	Assumed 12% of Population	Number of individuals affected during a disaster
MaxDistance	Maximum distance generated in distance calculation	Distance allowed to travel by a community
<i>Shelter</i>		
Name	LGU interview	Identity of a shelter
Longitude	Google Map & LGU interview	Longitudinal coordinates
Latitude	Google Map & LGU interview	Latitudinal coordinates
Area1	Google Map	Lot area of a shelter (level 1)
Cost1	Assumed 7,700 * Area1	Cost for constructing/maintaining a shelter with Area1
Area2	Assumed Area1 * 2	Lot area of a shelter (level 2)
Cost2	Assumed 60,000 * Area1	Cost for constructing/maintaining a shelter with Area2
ResToFlood	LGU interview	Resistance to flood indicator
ResToTyphoon	LGU interview	Resistance to typhoon indicator
ResToEarthquake	LGU interview	Resistance to earthquake indicator
Status	LGU interview	State of the physical structure of a shelter indicator
<i>Distance between Community and Shelter</i>		
distance	OpenStreetMap API	distance needed to travel by a community to a shelter

## System Evaluation

System evaluation focuses on assessing acceptability of the shelter location allocation system using the TAM determinants and ISO/IEC 25010 standard. These standards provides a framework for evaluating the software's quality and acceptability. The system evaluation includes the evaluation instrument, determining the population and sample, outlining data collection procedures, and discussing the data analysis techniques used.

**Table 4***Sources of Appended Shelter Data*

<b>Variable</b>	<b>Source</b>
Cost1	Assumed Area1 * (60,000 + 12,500)
Cost2	Assumed (Area2 * 60,000) + (Area1 * 12,500)
ResToFlood	Assumed TRUE
ResToTyphoon	Assumed TRUE
ResToEarthquake	Assumed TRUE
Status	Already an Empty Lot

***Evaluation Instrument***

The evaluation instrument is a structured questionnaire designed to assess the acceptability of the shelter location allocation system based on the determinants of Technology Acceptance Model(TAM) and key quality attributes outlined in the International Organization for Standardization and International Electoral Commission (ISO/IEC) 25010 standard. Questionnaires based on TAM was distributed to the potential end-users of the system. On the other hand, questionnaires based on ISO/IEC 25010 was distributed to the experts in software development.

TAM questionnaire evaluates the system's acceptability by the user of the system. This model answers why users accept or reject information systems, and examines a system's acceptance based on their attitudes, preferences, and behaviors.(Davis, 1987)

The following criteria are based upon the four determinants defined in TAM:

1. *Perceived Usefulness.* This answers on how much a user believes using the system will improve their performance such as job tasks. It evaluates whether the users thinks the proposed system will be genuinely beneficial to LGUs or if it can assist other LGUs effectively.

2. *Perceived Ease of Use.* This answers on how much a user believes using the system will be efficient and user-friendly. It considers whether the proposed system can be used smoothly with minimal errors and without performance issues.
3. *Attitude Towards Using.* This answers on what user feels when using the system based on their enjoyment and satisfaction. A positive attitude towards the system often leads to accepting the technology.
4. *Behavioral Intention to Use.* This answers on willingness to use the system in the future. It determines whether users find the system valuable enough to incorporate into their long-term plans.

Additionally, ISO/IEC 25010 questionnaire evaluates various aspects of the system, including usability, reliability, performance efficiency, and overall user satisfaction. Through this instrument, the study aims to gather objective data that will help determine how well the system meets user needs and expectations. (International Organization for Standardization and International Electrotechnical Commission, 2023)

The following criteria are based upon the nine quality characteristics for product quality model defined in ISO/IEC 25010:

1. *Functional Suitability.* This evaluates how well the system meets user needs and performs its intended functions. The questions will focus on the system's ability to allocate shelters effectively, manage community and shelter information, and provide accurate data.
2. *Performance Efficiency.* This attribute will evaluate the system's response time and processing capacity. The questionnaire will include items assessing the system's speed in performing functions, efficient use of resources such as memory

and processing power, and ability to handle maximum load requirements. By examining performance efficiency, the study aims to determine whether the system can perform reliably under diverse operational conditions.

3. *Compatibility.* This will assess the system's ability to exchange and use information with other systems. The questionnaire will ask how well the system integrates with external databases, applications, or computer systems.
4. *Interaction Capability.* This will prioritize the system's usability, learnability, and overall user satisfaction. The questionnaire will gather detailed user feedback regarding their experiences with the system. The questionnaire will address aspects such as ease of navigation, effectiveness in completing tasks, and general user engagement.
5. *Reliability.* This attribute will assess the system's interaction capability, focusing on its ease of use, appropriateness for users, and ability to guide users in completing tasks effectively. The evaluation will include questions on how easily users can recognize if the system meets their needs, learn its functions, and operate it with minimal errors. Additional focus will be on user engagement, inclusivity, and the availability of assistance to support a diverse range of users.
6. *Security.* The system ensures that all collected data will remain confidential and solely for this research. No data will be uploaded online, and all information will be stored offline. Access to data will be limited to the researchers and users.
7. *Maintainability.* This will evaluate the system's ease of adaptability to meet new requirements, correct errors, and improve performance. The questionnaire will assess the system's reusability, analyzing how parts of the system can be leveraged in future developments or other systems, and its testability, ensuring that any necessary changes can be efficiently implemented and quickly identified

so that testing can be done efficiently.

8. *Flexibility.* This will assess the system's ability to adapt to changing user needs and requirements. The questionnaire will evaluate the system's ability to support new features, incorporate updates, and seamlessly integrate with additional tools or systems as necessary. It will also examine how well the system accommodates changes in shelter allocation criteria, such as shifts in population density and shelter resistance.

### ***Population and Sample***

The population of this study consists of end-users and IT experts. For end-users, MDRRMO and MSWDO of the municipality of Calumpit. Meanwhile for IT experts, includes CICT professors from Bulacan State University, and someone who have experience in developing a system. The diversity of perspective of these are important for the comprehensive evaluation of the system's acceptability.

**MDRRMO:** The staff consists of Municipal Disaster Risk Reduction Management Office (MDRRMO), who are responsible for formulating and implementing the province's disaster risk reduction plan. Their insights are vital for understanding the operational requirements considerations for implementing the shelter location allocation system, ensuring it aligns with established disaster response protocols and local needs.

**MSWDO:** The Municipal Social Welfare and Development Office (MSWDO) plays a key role in managing the evacuation and welfare of the communities during disasters. Their expertise is essential in ensuring that the shelter allocation system aligns with evacuees' specific needs, such as accessibility and capacity to the shelter location allocation across the province. Their input assisted tailoring the system to address the welfare requirements of evacuee management during emergencies.

**CICT professors:** Coming from the College of Information and Communication Technology (CICT) of Bulacan State University, professors have

significant academic background and experience to technologies. This part of population assessed the system's performance and functionality with the help of their knowledge and expertise.

**System Developers:** Experts with extensive experience in system development play an important role in project evaluation. They are commonly found in businesses that design, propose, and develop systems for their clients. Their expertise enables them to understand and address real-world client requirements, guiding the system to be acceptable to users.

The sampling technique that was utilized for end-users is Stratified Sampling Technique, where the population is divided into a respective groups or strata, where in this study, our stratum is the MDRRMO and MSWDO. This ensures comprehensive representation, to capture the perspectives of different stakeholder groups proportionately. The sample size of end-users were then computed using G\*Power, a statistical software tool. With a confidence level of 95% or 0.05 margin of error, the sample size would be 23. Since the sample size would be much smaller than the population size, then conducting system evaluation would be feasible.

Meanwhile, for IT experts, Purposive Sampling Technique was employed. Researchers purposively selected 5 IT experts. These experts was chosen based on their qualifications and relevant experience to provide insights into the system's design, functionality, and performance. This technique ensured that the selected experts evaluating the system provided comprehensible and accurate feedback while also ensuring its feasibility.

### ***Data Collection Procedures***

Evaluation phase gauges the system's acceptability and user satisfaction. To do this, a questionnaire was developed based on TAM and ISO/IEC 25010, which employs a 10-point rating scale, allowing participants to provide precise feedback on each quality criterion. The system was demonstrated to a selected sample

population in a face-to-face presentation, where they had the chance to interact with the system firsthand. This was followed by the completion of the questionnaire, enabling participants to provide feedback based on their experience using the system.

Following the research instruments ensures that the system meets its intended objectives and offers insights into potential areas for improvement, which were critical for broader implementation in disaster-response operations. Through the data collection process, the researchers ensured that all ethical considerations are thoroughly addressed to uphold the integrity and privacy of the participants.

### ***Data Processing and Analysis***

This study's data processing involves structured analysis to interpret findings from the acceptability survey, aligning with the ISO/IEC 25010 standard and TAM determinants. This standard evaluates key quality attributes, and each attribute was assessed using a 10-point numerical rating scale. 1 = completely disagree, and 10 = completely agree, as shown in Figure 10

**Figure 10**

*10-point numerical rating scale*



After the data collection, the rating scale categorizes the acceptability levels. Descriptive statistics was utilized to analyze the collected data. Analysis includes calculating the minimum, maximum, mean, and standard deviation for each category. Formula below shows the mean that computes the average score. This use of data allows both the system functionality and its user acceptability to be comprehensively assessed. Table 5 shows the verbal interpretation of the computed mean corresponds to the level of acceptability based on the study by Eladia et al. (2024).

$$\bar{x} = \frac{\sum_{i=1}^n x_i}{n}$$

where:

$\bar{x}$  sample mean

$n$  sample size

$x_i$  data points

**Table 5**

*Mean Score Interval and its Verbal Interpretation*

Mean Score Interval	Level of Acceptance
1.00 - 2.80	Poorly Acceptable
2.81 - 4.60	Fairly Acceptable
4.61 - 6.40	Acceptable
6.41 - 8.20	Moderately Acceptable
8.21 - 10.00	Highly Acceptable

Formula below shows the standard deviation calculation which shows the dispersion of scores relative to the mean. A standard deviation that is closer to the value of 0 indicates the spread of data is closer to the mean.

$$S = \sqrt{\frac{\sum_{i=1}^n (x_i - \bar{x})^2}{n - 1}}$$

where:

$S$  sample standard deviation

$\bar{x}$  sample mean

$n$  sample size

$x_i$  data points

### Ethical Considerations

Data gathered contained sensitive data so that ethical considerations should be practiced throughout the research. Informed consent obtained from each participant,

providing them with a clear understanding of the research purpose, procedures, and their rights to withdraw at any time. To protect the participants' privacy, all responses are anonymized and handled with strict confidentiality. Additionally, data usage was restricted to research purposes only, ensuring that participants' information remains safeguarded throughout the research process and beyond.

**Informed Consent:** All respondents are informed about the purpose, procedures, and potential impacts of the study before they agree to participate. The respondents were given a detailed explanation of the study, including the nature of their involvement, the voluntary nature of participation, and their right to withdraw at any time.

**Confidentiality and Anonymity:** Personal identifiers are removed from the data to ensure that the respondents cannot be traced back to other respondents. Data are stored securely, and access is restricted to the researchers. Any publications or presentations resulting from the study will use aggregated data with no individual responses disclosed, safeguarding the identity and privacy of all respondents.

**Data Protection:** The study adheres to relevant data protection regulations, such as local data protection laws, ensuring the secure handling and storage of all collected data. Informing the respondents about how their data was collected, stored, and used. Their rights to privacy and data protection is respected, and only authorized researchers will have access to the information.

**Minimizing Harm:** The study is structured to minimize any potential harm to respondents. This includes ensuring that all questions are respectful, non-discriminatory, and that the data collection process does not inconvenience the respondents. Any potential risks are clearly communicated, and measures are implemented to mitigate these risks and uphold the respondents well-being throughout the study.

**Transparency and Honesty:** The researchers uphold transparency and

honesty throughout every stage of the study. This commitment includes accurately reporting research findings, acknowledging limitations, and strictly avoiding data manipulation or bias. Respondents were informed of the study's progress, purposes, and outcomes, ensuring they remain fully aware of how their contributions are utilized and valued within the research.

By adhering to these ethical principles, the study safeguards respondents' rights and well-being, uphold the integrity of the research process, and enhance the credibility and reliability of its findings. This ethical approach shows trust between researchers and respondents, contributing to meaningful and responsible research outcomes.

## CHAPTER IV

### PRESENTATION, ANALYSIS AND INTERPRETATION OF DATA

This chapter details the functionalities of the developed system, including its user interface design. Moreover, the system answers the optimal shelter location-allocation for Calumpit. It also presents the evaluation results gathered from the LGU and IT experts, assessing the system's acceptability and alignment with local needs.

#### **The Developed System**


The researchers and developers of this thesis developed a decision support system to optimize shelter location allocation since there was a lack of system development. Identifying the most optimal shelter facility for a community is the system's main function. Specifically, it has five key features that let users completely modify the input parameters, and output processing.

#### ***Data Modification***

The process of creating, updating, or deleting data within the system to maintain accuracy and relevance. This ensures that all records are up-to-date and properly managed so they can effectively be used for shelter allocation.

The dashboard provides an overview of a list of shelters and communities as shown in Figure 11. It also displays a map where shelters and communities are pinned. Users can see whether a shelter is active or inactive. Additionally, the user can manipulate the map to filter and display only active shelter as well as shelters that are built, partially built, damaged, empty lot, and resistance to flood, typhoon, and earthquake

Community management module manages the recorded details of barangays as shown in Figure 12. It displays whether a barangay is active or inactive, along with its latitude, longitude, population, affected population, maximum distance, remarks, and

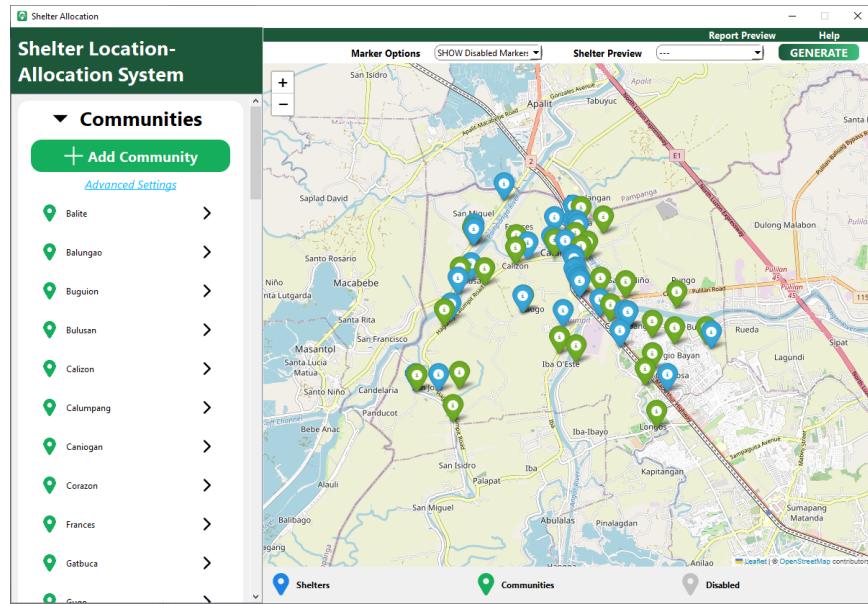**Figure 11***Dashboard***Figure 12***Community Management*

Manage Communities									
	Active	Name	Latitude	Longitude	Population	AffectedPop	MaxDistance (m)	Remarks	Delete
1	<input type="checkbox"/>	Balite	14.8956	120.7855	5016	602	12		
2	<input checked="" type="checkbox"/>	Balungao	14.9143	120.7622	5720	687	12		
3	<input checked="" type="checkbox"/>	Buguiou	14.894	120.7985	3841	461	12		
4	<input checked="" type="checkbox"/>	Bulusan	14.9076	120.7455	2603	313	12		
5	<input checked="" type="checkbox"/>	Calizon	14.9125	120.753	2221	267	12		
6	<input checked="" type="checkbox"/>	Calumpang	14.8845	120.7838	3517	423	12		
7	<input checked="" type="checkbox"/>	Caniogan	14.9054	120.7733	4510	542	12		
8	<input checked="" type="checkbox"/>	Corazon	14.9128	120.7686	2175	261	12		
9	<input checked="" type="checkbox"/>	Frances	14.9153	120.7532	6129	736	12		
10	<input checked="" type="checkbox"/>	Gatbuca	14.9218	120.7685	6384	767	12		
11	<input checked="" type="checkbox"/>	Gugo	14.9014	120.7548	1960	236	12		
12	<input checked="" type="checkbox"/>	Iba Este	14.8899	120.7673	4161	500	12		
13	<input checked="" type="checkbox"/>	Iba O'Este	14.8919	120.7635	14085	1691	12		
14	<input checked="" type="checkbox"/>	Longos	14.8748	120.7866	4265	512	12		
15	<input checked="" type="checkbox"/>	Meyulao	14.9078	120.7397	4280	514	12		
16	<input checked="" type="checkbox"/>	Meyto	14.8831	120.7295	2925	351	12		
17	<input checked="" type="checkbox"/>	Palimbang	14.8994	120.7756	1684	203	12		

[Cancel](#) [Save Changes](#)

a delete button. Users can also add new communities, download a template to ensure correct formatting when importing data, and manage barangay-related information efficiently.

The shelter management module, as shown in Figure 13, is similar to community

**Figure 13**  
*Shelter Management*

The screenshot shows a software interface titled 'Manage Shelters'. At the top right are three buttons: 'Download Template' (blue), 'Import' (green), and '+ Add Shelter' (white). Below is a table with 15 rows of shelter data. The columns are: Active (checkbox), Name, Latitude, Longitude, Area1 (sqm), Cost1 (PHP), Area2 (sqm), Cost2 (PHP), FloodProof, and TyphoonProof. The data includes various schools and landmarks across different coordinates and areas. At the bottom right are 'Cancel' and 'Save Changes' buttons.

	Active	Name	Latitude	Longitude	Area1 (sqm)	Cost1 (PHP)	Area2 (sqm)	Cost2 (PHP)	FloodProof	TyphoonProof
1	<input checked="" type="checkbox"/>	BMLTC Multi-Purpose Bldg and EC	14.9185376869108	120.56768211462	1641	12635700	3282	98460000	True	True
2	<input checked="" type="checkbox"/>	F. Mendoza Memorial Elem. Sch.	14.9176780529243	120.76787878289	1671	12866700	3342	100260000	True	True
3	<input checked="" type="checkbox"/>	Calumpit Sports Complex	14.918539948724	120.757571728115	947	7291900	1894	56820000	True	True
4	<input checked="" type="checkbox"/>	Gatbua Basketball Court	14.9221390531142	120.766774213649	376	2895200	752	22560000	True	True
5	<input checked="" type="checkbox"/>	San Miguel Meystulao High School	14.91679910101	120.742941581954	3464	26672800	6928	207840000	True	True
6	<input checked="" type="checkbox"/>	Dolfo Damiana Elem School	14.91770158682	120.74304861972	3135	24139500	6270	18810000	True	True
7	<input checked="" type="checkbox"/>	Danga Dike	14.9271290793079	120.75016278348	126	970200	252	7560000	False	False
8	<input checked="" type="checkbox"/>	Meystulao Multipurpose/E.C.	14.90551318404	120.739161033176	100	770000	200	6000000	True	True
9	<input checked="" type="checkbox"/>	Calizon Dike	14.9136800407707	120.75587107521	126	970200	252	7560000	False	False
10	<input checked="" type="checkbox"/>	San Marcos Elem. Sch.	14.8787852342351	120.77880710188	1147	8831900	2294	68820000	True	True
11	<input checked="" type="checkbox"/>	San Marcos National H.S.	14.8933901983676	120.777840587943	6353	4891800	12706	381180000	True	True
12	<input checked="" type="checkbox"/>	GMA Kapuso E.C.	14.8930035477281	120.79958008805	200	1540000	400	12000000	True	True
13	<input checked="" type="checkbox"/>	NV9 Multi-Purpose	14.8980360749457	120.76423422054	2513	19350100	5026	150780000	True	True
14	<input checked="" type="checkbox"/>	Frances E.C.	14.9194611702998	120.76212685224	150	1155000	300	9000000	True	True
15	<input checked="" type="checkbox"/>	Balungao E.C.	14.9148551401837	120.7614692937455	216	1663200	432	12960000	True	True

management but includes different data fields. It contains information such as the shelter's name, latitude, longitude, and classification as a level 1 or level 2 shelter. The module also tracks the cost of construction and maintenance for each level. Additionally, it indicates whether the shelter is resistant to floods, typhoons, and earthquakes. Users can also view the shelter's status – whether it is built, partially built, damaged, or an empty lot.

### ***Model Modification***

This concerns the parameters to be used in the model that may be modified for a more ideal setup depending on the preferences of the user. The parameters that may be changed here include the area per individual based on meters squared, the max number of level 2 shelters and shelters in general, the weights for both distance and cost, the number of generations, the number of populations in a generation, and the mutation rate. Measures are put in place to prevent entering of wrong values in these parameters such as letters or negative numbers.

These factors impact the time taken to simulate data as well as the efficiency of the simulation, it is recommended to keep the parameters at default values unless

**Figure 14**  
*Model Parameter Settings*

Parameter	Value
<u>Model</u>	Bilevel No Transfer (BNT)
<u>AreaPerIndividual</u>	1
<u>MaxLvl2Shelters</u>	33
<u>MaxShelters</u>	33
<u>WeightDistance</u>	0.5
<u>WeightCost</u>	0.5
<u>Generations</u>	1000
<u>Population</u>	20
<u>Mutation Rate</u>	0.1

**DONE**


the user is knowledgeable about the model or the system. These parameters are modified in the Model Parameter Settings module as shown in Figure 14, which may be accessed from the Solve Settings module by clicking Advanced Settings below Model.

### ***Data Simulation***

This pertains to solving the model by running the Genetic Algorithm, which determines the most optimal shelter location allocation. As the core functionality of the system, it processes input data of communities and shelters, applies defined model parameters, then generates and displays the best allocation of the municipality.


Progress dialog as shown in Figure 15 provides real-time logs and tracks the progress of the simulation. The process starts by computing the distances between each community and each shelter using a Python library, OSMnx. Once the distances

**Figure 15**  
*Progress Dialog*

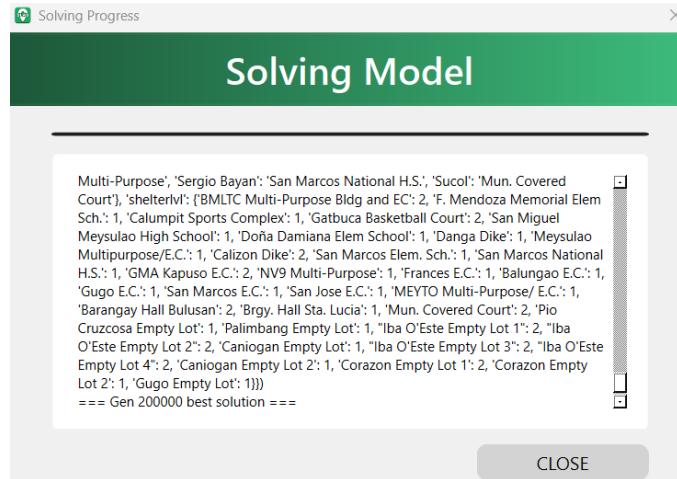

are calculated, the system proceeds with the Genetic Algorithm to optimize the allocation. Users also have the option to cancel the process at any time.

**Figure 16**  
*Report Dialog*

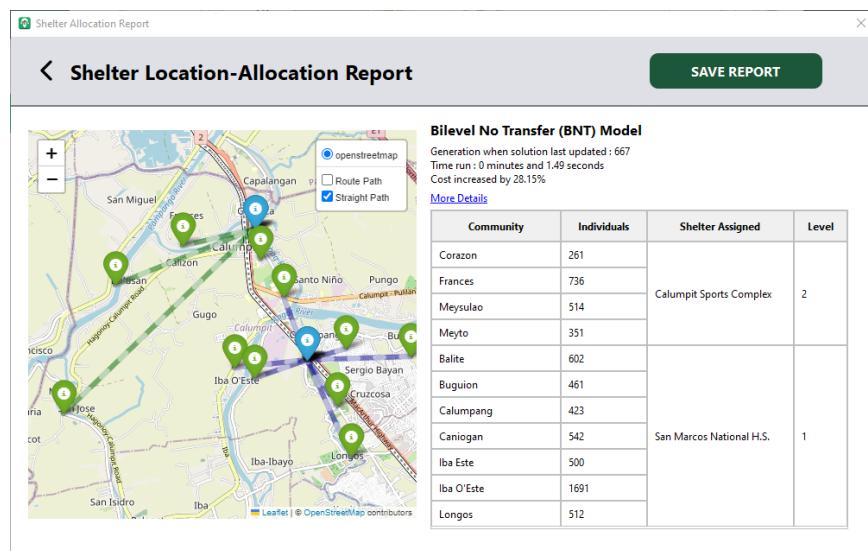

After the solving process is completed, report dialog appears displaying the final allocation results as shown in Figure 16. It shows which communities are assigned to shelters, and displays the paths they can take on a map. This helps users analyze the feasibility and efficiency of the allocation.

The Genetic Algorithm is implemented from scratch using Python, ensuring full control over its functionality and optimization process. The main functions in the code include fitness calculation, constraint enforcement, and the implementation of selection, mutation, and crossover.

Appendix C.5 details the fitness calculation, which represents the model's objective value. The first loop calculates the total distance, while the second loop determines the cost based on the level of the opened shelters.


Appendices C.6, C.7, C.8, and C.9 implement the constraint functions, adding penalties to the objective value when violated. These constraints include maximum distance constraint, initial capacity constraint, maximum number of level 2 shelters that can be constructed/allocated, maximum number of shelters that can be constructed/allocated. Since the implemented Genetic Algorithm operates on integers, the constraints ensuring that each community is assigned only one shelter and one level are already satisfied.

### ***Shelter Tagging***

This concerns the classification of shelters based on both structural resilience and current condition, ensuring shelters are appropriately assigned to communities based on availability, cost, and risk levels. Shelters are categorized in both resistance capabilities and status; resistance capabilities include flood-resistant, typhoon-resistant, and earthquake-resistant, and are not mutually exclusive to one another, for example, a shelter can be both flood and typhoon resistant. In terms of status, shelters can be built, partially built, damaged, and empty lots, each with varying costs depending on maintenance and construction.

Selecting shelters with specific resistances and statuses in mind is done in the Solve Settings module as shown in Figure 17, where selecting or deselecting a specific resistance will remove shelters that do not meet the criteria from the data simulation. This ensures users will not assign communities to shelters that are not suited to

**Figure 17**  
*Solve Settings*

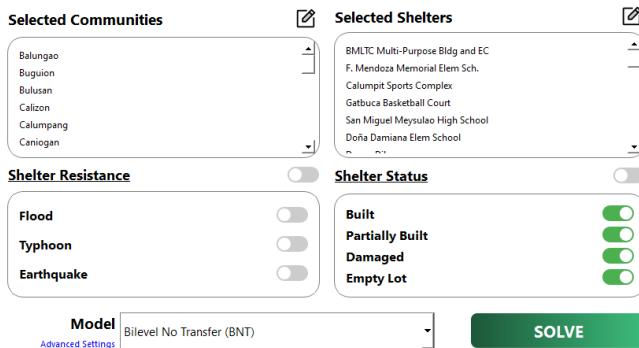


the situation. Users may also check the status and resistances of a specific shelter in either the dashboard module by selecting a shelter, or in the shelter advanced settings, displaying all shelters' statuses.

### ***Report Protection***

To maintain confidentiality and prevent the unauthorized modification of reports, a security mechanism has been implemented in the system. This module includes password authentication, report encryption and identification of the creator of a report based on device-specific attributes.

Upon finishing data simulation, the generated report may be saved in an excel format, and gives users the option to add password protection to the file through a popup as shown in Figure 18. This ensures only intended users may access the report, the generated excel file itself is also read-only, without the ability to modify the data without authorization. The protected file was encrypted using a Python library, MSoffcrypto.

The excel file also contains identification of the creator of the report, containing three device-specific identifiers, the IP address or the location of the user's device, the MAC address or the identifier of the user's network interface, as well as the name of the device the report was generated in. This information is logged in the password

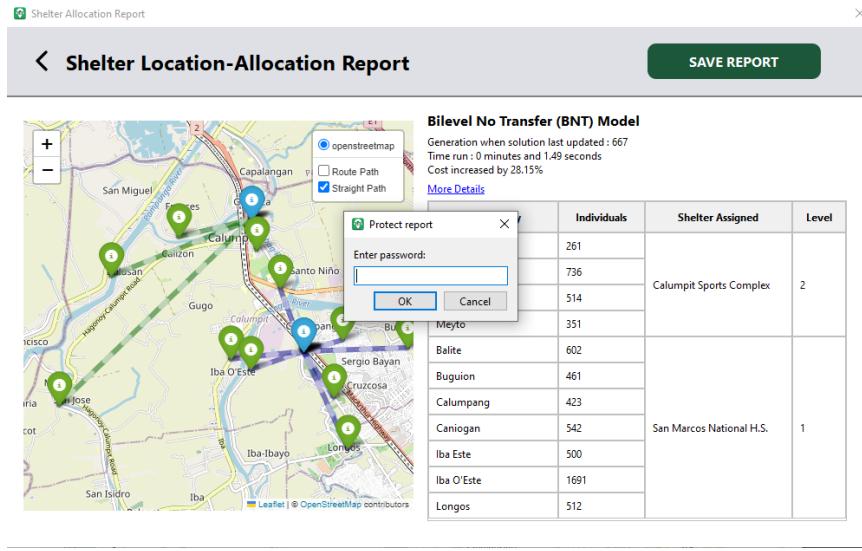**Figure 18***Input Password Popup*

protected excel file, enhancing security and ensuring unauthorized users are logged and tracked.

### Generated Shelter Location-Allocation Report

This section discusses the process of generating reports for shelter location allocation. The report helps in optimizing shelter assignments for communities based on various parameters and ensuring efficient disaster response. The data used considers only 12% of the population in each barangay as affected. Additionally, the shelters have a maintenance cost, which are factored into the optimization process.

Table below shows the parameters used for the BNT model and the genetic algorithm. Table ?? presents the optimized shelter location-allocation results generated by the system. Five shelters were opened and assigned to respective communities. All shelters were opened as level 1, except for Mun. Covered Court, which was upgraded to level 2. This suggests that upgrading this shelter is better than opening an additional one.


Table below shows the details of the result. Note that this report is generated

Parameter	Value
Area Per Individual in $m^2$	1
Maximum Level 2 Shelters	33
Maximum Shelters	33
Weight Distance	0.5
Weight Cost	0.5
Generations	200000
Population	100
Mutation Rate	0.1

by the system running on Huawei Matebook D15 with processor of Ryzen 7 5700U. The generated report can be downloaded as an Excel file. In the Report Module, a map displays where communities are allocated to their designated shelters. Figure 19a and 19b shows the generated map which visualizes the allocation result.

**Figure 19**

*Community to Shelter Paths*

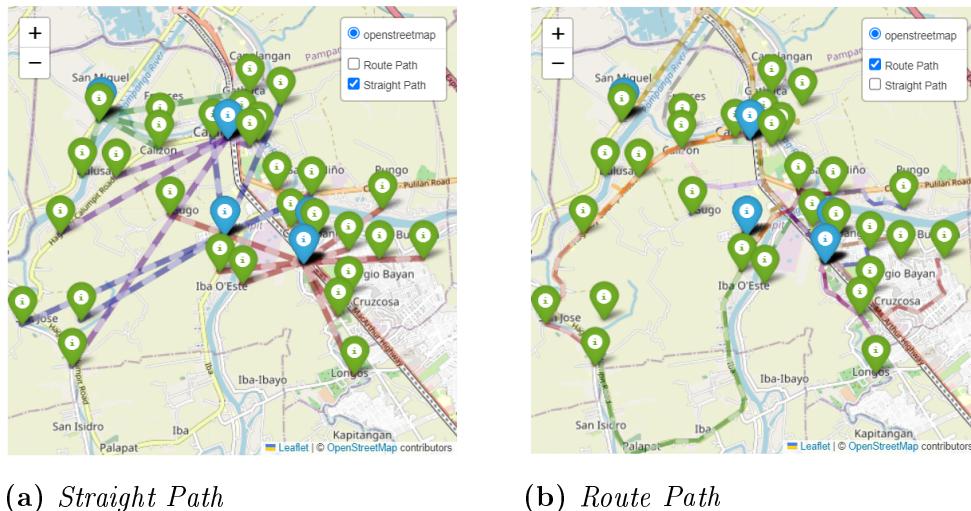

(a) Straight Path

(b) Route Path

## System Evaluation

The developed system underwent an assessment through survey questionnaires to evaluate its acceptability. The respondents included the target users, specifically the MSWDO and MDRRMO of Calumpit. In addition, IT experts with experience in

<b>Shelter Assigned</b>	<b>Community</b>
<i>Level 1</i>	
	Calizon
	Frances
Doña Damiana Elem School	Gatbuca
	Meysulao
	San Miguel
	Balungao
	Meyto
NV9 Multi-Purpose	San Jose
	Santo Niño
	Sapang Bayan
	Caniogan
San Marcos Elem. Sch.	Palimbang
	San Marcos
	Balite
	Baguion
	Calumpang
	Gugo
San Marcos National H.S.	Iba Este
	Iba O'Este
	Longos
	Pio Cruzcosa
	Pungo
	Sergio Bayan
<i>Level 2</i>	
	Bulusan
	Corazon
Mun. Covered Court	Panducot
	Poblacion
	Santa Lucia
	Sucol

system development participated in the evaluation to provide technical insights and ensure that the system met quality standards.

Item	Value
Objective Value	72034087
Time Run	73 minutes and 30.96 seconds
Cost of Opened Shelters	144019600
Generation when solution last updated	136256

### ***End-Users***

The researchers conducted a survey to 23 respondents from the MSWDO and MDRRMO of Calumpit. The survey instrument was based on TAM which consists of four criteria: perceived usefulness, perceived ease of use, attitude towards using, and behavioral intention to use. The gathered data was analyzed to determine the users' acceptance of the system.

**Table 6**

*End User Evaluation*

Criteria	Mean	SD Range
Perceived Usefulness	9.40	0.54-0.80
Perceived Ease of Use	9.47	0.58-0.66
Attitude Towards Using	9.48	0.58-0.59
Behavioral Intention to Use	9.41	0.58-0.70

Table 6 presents the end-users' evaluation across the four determinants of TAM. The mean scores for all determinants range from 9.4 to 9.48, all interpreted as "Strongly Agree". The standard deviations range from 0.54 to 0.8, indicating low variability in responses. This indicates the system as "Highly Acceptable" to the target users. This suggests that they are likely to adopt and use the system to support their work in strategic planning.

### ***IT Experts***

To evaluate the system's technical quality, the researchers surveyed five IT experts, from the faculty of the College of Information and Communications

Technology (CICT) at Bulacan State University, and developers from a technology company. The survey instrument was based on the ISO/IEC 25010 software quality model, which includes eight criteria: Functional Suitability, Performance Efficiency, Compatibility, Interaction Capability, Reliability, Security, Maintainability, and Flexibility. The data gathered from this assessment provided valuable insights into the technical aspects and overall quality of the system.

**Table 7**  
*IT Experts Evaluation*

Criteria	Mean	SD Range
Functional Suitability	9.80	0.00-0.55
Performance Efficiency	9.67	0.45-0.55
Compatibility	9.00	0.84-1.30
Interaction Capability	9.33	0.45-0.84
Reliability	9.60	0.45-0.71
Security	9.67	0.45-1.30
Maintainability	9.24	0.45-1.14
Flexibility	9.50	0.00-1.10

Table 7 presents the IT experts' evaluation across the eight criteria from ISO/IEC 25010. The mean scores for all determinants range from 9 to 9.8, all interpreted as "Strongly Agree". The standard deviations range below 1.3, indicating low variability in responses. This indicates the system as "Highly Acceptable" based on the IT Experts. This suggests that the system developed met the international standards for a software product.

#### *Comments and Suggestions*

Based on feedback from IT experts, the system's key strengths include its comprehensive functionality, effectively performing all required functions for its purpose. The implementation leverages Python and relevant libraries to optimize performance. It accurately identifies optimal shelter locations, demonstrating

reliability and efficiency in processing data. Additionally, the user interface is simple and easy to navigate, minimizing complexity.

Several areas for improvement were identified by IT experts. The system needs to support new model configurations without requiring large code changes, and additional information should be displayed upon user interaction. The map interface could be cleaner and more visually organized, and enhancements are needed to ensure the protection of sensitive data.

To address these areas, IT experts provided several suggestions. Developing a mobile application would facilitate citizen connectivity with the platform. Including travel time estimates to shelters and implementing real-time data processing and display would further improve functionality. Allowing the configuration of new models through the UI would reduce the need for code alterations, and simplifying error messages would ensure clarity for non-IT users.

In addition to the feedback from IT experts, members of the Local Government Unit (LGU) of Calumpit provided valuable insights. Specifically the importance of ensuring the exact identification of lots for shelter placement. Continuing to refine the system would enhance its usability and performance, and adding more intuitive features would improve accessibility and understanding for non-technical users.

This feedback from the surveyed IT experts and LGU employees provide a clear guide for future improvements in the system, providing understandability, adaptability, usability, and effectiveness.

## CHAPTER V

### SUMMARY, CONCLUSION AND RECOMMENDATIONS

As the system was fully developed and the evaluation process was completed, this chapter presents a summary of the key findings obtained in the study. The conclusions were drawn based on the results of the system evaluation, and generated shelter location allocation. Furthermore, this chapter provides recommendations for future researchers and developers.

#### **Summary of Findings**

1. As the Philippines ranks at the top of the World Risk Index as of 2024, and with Calumpit, Bulacan identified as highly vulnerable to typhoons and floods, researchers developed a system to assist LGUs in disaster response planning. The Shelter Location-Allocation System was created to find the optimal assignment of communities to shelters. It adopts the Bilevel No Transfer Model, which considers distance, cost, capacity, and the hierarchy of evacuation centers. Additionally, the model was solved using a genetic algorithm, which is also integrated into the system. With the help of the LGU of Calumpit, the necessary data for simulation was gathered and processed using the system. The following features are highlighted in the developed Shelter Location-Allocation System:
  - 1.1 Data Modification: Allows users to create, read, update, and delete input community and shelter data.
  - 1.2 Model Modification: Allows users to update or edit model parameters for both the Bilevel No Transfer (BNT) model and genetic algorithm.
  - 1.3 Data Simulation: Solves and generates optimal shelter location-allocation results based on given data and model parameters using genetic algorithm.

- 1.4 Shelter Tagging: Filters shelters based on their resistance and status data.
- 1.5 Report Protection: Secures and protects generated reports with password protection.
2. The system generated an optimal shelter location-allocation for the municipality of Calumpit after 200,000 generations with a time run of 73 minutes. Five shelters were opened to be used as an evacuation center:
  - 2.1 Doña Damiana Elem School opened as level 1 accommodates barangay Calizon, Frances, Gatbuca, Meysulao, and San Miguel.
  - 2.2 Mun. Covered Court opened as level 2 accommodates barangay Bulusan, Corazon, Panducot, Poblacion, Santa Lucia, and Sucol
  - 2.3 NV9 Multi-Purpose opened as level 1 accommodates barangay Balungao, Meyto, San Jose, Santo Niño, and Sapang Bayan
  - 2.4 San Marcos Elem. Sch. opened as level 1 accommodates barangay Caniogan, Palimbang, and San Marcos
  - 2.5 San Marcos National H.S. opened as level 1 accommodates barangay Balite, Baguiomn, Calumpang, Gugo, Iba Este, Iba O'Este, Longos, Pio Cruzcosa, Pungo, and Sergio Bayan.
3. The system was evaluated by 23 respondents from the MSWDO and MDRRMO of Calumpit, representing the intended end-users of the system to assess the acceptability of the system towards their job. The end-user respondents overall strongly agreed that the system demonstrates a high level of acceptability based on the Technology Acceptance Model (TAM). The evaluation resulted in the following scores: perceived usefulness – 9.4, perceived ease of use – 9.47, attitude towards using – 9.48, and behavioral intention – 9.41. All criteria were interpreted as “Strongly Agree”, with low variability in responses. Feedback

from LGUs suggest the need for better lot identification and better accessibility and usability features.

4. Additionally, 5 IT experts were surveyed to assess the system's functionality, usability, and overall quality. IT Experts overall strongly agrees as well that the system demonstrates a high level of acceptability based on the ISO/IEC 25010. The evaluation resulted in the following scores: functional suitability – 9.8, performance efficiency – 9.67, compatibility – 9, interaction capability – 9.33, reliability – 9.6, security – 9.32, maintainability – 9.24, and flexibility – 9.5. All criteria were interpreted as “Strongly Agree”, with low variability in responses. IT experts praise the system's functionality, reliability, and interface, while suggesting improvements such as mobile app development, more elaborate data processing, model configurability and better data protection.

## Conclusion

Based on the aforementioned summaries, the following conclusions can be derived:

1. The Shelter Location-Allocation System was designed and implemented for the Municipality of Calumpit, Bulacan, to assist decision-makers in optimally assigning and selecting shelters as evacuation centers for communities. The system was developed as a desktop app using Python programming language with the Qt framework, integrating the BNT model and genetic algorithm for optimization computations. It features comprehensive functionalities such as Data Modification, Model Modification, Data Simulation, Shelter Tagging, and Report Protection, all contributing to an effective and quality decision support system for disaster response planning.
2. The generated shelter location-allocation for Calumpit opens only five shelters, with one required to be a level 2 shelter. This suggests that upgrading an

existing shelter is more optimal than opening an additional one. It also indicates that other built shelters may remain closed to minimize maintenance costs. Additionally, no empty lots were selected, which may imply that constructing a new shelter is not yet necessary. However, it is important to note that actual affected population and cost considerations may differ based on the decision maker's assessments. The system allows users to adjust data and model parameters as needed.

3. The system got high scores from end-users which is interpreted as "Highly Acceptable". This suggests that they are likely to adopt and use the system to support their work in disaster response planning.
4. The system got high scores from IT experts which is interpreted as "Highly Acceptable". This suggests that the system developed met the international standards for a software product.

## Recommendations

Several areas for improvement have been identified to further enhance and expand this study, providing valuable insights for future researchers and developers. Implementing the following recommendations can refine the study's methodology, improve the system's effectiveness, and ensure its adaptability to evolving disaster response needs:

1. To improve the efficiency of shelter planning, the addition of other shelter location-allocation models may also be explored. Alongside with the BNT model, the Single-level with Workplace Distance Inclusion Model (WORK) can help optimize shelter placement by considering the proximity of workplaces. Additionally, using the Bilevel Non-Sequential Transfer Model (BNST) and Bilevel Sequential Transfer Model (BST) can show other insight and allow for comparisons between different shelter location models.

2. Enhancing data accuracy is important for an effective and efficient disaster response and shelter allocation. The addition of an integrated real-time data collection, geographic information system (GIS), and census based projections to improve the accuracy of population estimates. Additionally, incorporating historical disaster data and demographic trends can improve the shelter and resource allocation.
3. The system's performance could be further enhanced through GPU computation and, potentially, emerging technologies like Quantum Computing. These improvements in computational power would be essential if the project were to be implemented nationwide, making it feasible to accommodate more communities and shelters across the country.
4. The system's effectiveness may be tested in different provinces and municipalities to evaluate its effectiveness in varying geographic and demographic conditions. Conducting pilot studies in other high risk disaster areas can provide valuable insights into necessary adjustments. Furthermore the integration of local government disaster plans and policies can help enhance the future systems.
5. An optimized way to function seamlessly across different devices such as desktops, tablets, and mobile phones as well as expanding support to other operating systems like macOS and Linux would enhance accessibility.

## REFERENCES

- Cabanilla, K. I. M., Enriquez, E. A. T., Mendoza, R., & Mendoza, V. M. P. (2021). Optimal selection of covid-19 vaccination sites in the philippines at the municipal level. <https://doi.org/10.1101/2021.06.20.21259194>
- Cavdur, F., & Sebatli, A. (2019). A decision support tool for allocating temporary-disaster-response facilities. *Decision Support Systems*, 127. <https://doi.org/10.1016/j.dss.2019.113145>
- Davis, F. D. (1987). User acceptance of information systems : The technology acceptance model (tam). *Man-Machine Studies*, 1993, 475–487. [https://www.researchgate.net/publication/30838394\\_User\\_acceptance\\_of\\_information\\_systems\\_the\\_technology\\_acceptance\\_model\\_TAM](https://www.researchgate.net/publication/30838394_User_acceptance_of_information_systems_the_technology_acceptance_model_TAM)
- Department of Public Works and Highways. (2025). Construction of multipurpose building at brgy. frances, calumpit, bulacan. [https://dpwh.gov.ph/dpwh/sites/default/files/webform/civil\\_works/advertisement/25cc0240\\_plan-construction\\_of\\_multi-purpose\\_building\\_at\\_brgy.\\_francescalumpit\\_bulacan-c\\_2-storey300\\_square\\_meters.pdf](https://dpwh.gov.ph/dpwh/sites/default/files/webform/civil_works/advertisement/25cc0240_plan-construction_of_multi-purpose_building_at_brgy._francescalumpit_bulacan-c_2-storey300_square_meters.pdf)
- Department of the Interior and Local Government. (2017). Region iii - central luzon : Evacuation facility in sta. rita. <https://t-subaybayan.dilg.gov.ph/projects/20357>
- Department of the Interior and Local Government. (2019). Improvement/rehabilitation of evacuation center in brgy sta. rita. <https://t-subaybayan.dilg.gov.ph/projects/37493>
- Department of the Interior and Local Government. (2022). List of locally funded projects. [https://www.dilg.gov.ph/PDF\\_File/reportorial/dilg-reportorial-2022712\\_2b19cd0795.pdf](https://www.dilg.gov.ph/PDF_File/reportorial/dilg-reportorial-2022712_2b19cd0795.pdf)

- Eladia, C. P., Legaspi, J. J. B., Navarro, M. U., & Tanig, T. D. (2024). Eye on ai: Investigating the intention to use and acceptance of generative artificial intelligence in bulacan state university. *Educational Administration Theory and Practice journal*, 30. 10.53555/kuey.v30i8.6458
- Flebus, C. G. (1941). Air raid shelters. *The Military Engineer*, 33, 37–42. <https://www-jstor-org.dclibrary.idm.oclc.org/stable/44555538?seq=1>
- Galvan, E., & Stapleton, F. (2020). Semantic based distance approaches in multi-objective genetic programming. *2020 IEEE Symposium Series on Computational Intelligence*, 149–156. doi.org / 10 . 1109 / SSCI47803 . 2020 . 9308386
- Gozum, I. (2023). Hope never sinks in flooded bulacan. *Rappler*. <https://www.rappler.com/phippines/luzon/hope-never-sinks-in-flooded-bulacan/>
- International Organization for Standardization and International Electrotechnical Commission. (2023). Systems and software engineering — systems and software quality requirements and evaluation (square) — product quality model. *International Organization for Standardization and International Electoral Commission*. <https://www.iso.org/obp/ui/#iso:std:iso-iec:25010:ed-2:v1:en>
- Iuchi, K., Jibiki, Y., Solidum, R., & Santiago, R. (2019). Natural hazards governance in the philippines. <http://dx.doi.org/10.1093/acrefore/9780199389407.013.233>
- Jayathilaka, C. (2020). Agile methodology. <https://medium.com/@chathmini96/agile-methodology-30ec4cdf3fc>
- Lomer, A. R. B., Rezaeian, M., Rezaei, H., Lorestani, A., Mijani, N., Mahdad, M., Raeisi, A., & Arsanjani, J. J. (2023). Optimizing emergency shelter selection in earthquakes using a risk-driven large group decision-making support system. *Sustainability*, 15. <https://doi.org/10.3390/su15054019>

- Ma, Y., Xu, W., Qin, L., & Zhao, X. (2019). Site selection models in natural disaster shelters: A review. *Sustainability*, 11. <https://doi.org/10.3390/su11020399>
- Maghawry, A., Hodhod, R., Omar, Y., & Kholief, M. (2020). An approach for optimizing multi-objective problems using hybrid genetic algorithms. *Soft Computing*, 25, 389–405. <https://doi.org/10.1007/s00500-020-05149-3>
- Mananghaya, J. (2009). Ondoy' leaves 95 dead; 247,555 affected by floods. *philstar Global*. <https://www.philstar.com/headlines/2009/09/28/508947/ondoy-leaves-95-dead-247555-affected-floods>
- Manongas, L. M. C. G. (2021). *Emergency shelter selection models with modification on transferability and evacuation distance minimization*.
- Mathew, T. (2012). Genetic algorithm. [https://datajobstest.com/data-science-repo/Genetic-Algorithm-Guide-\[Tom-Mathew\].pdf](https://datajobstest.com/data-science-repo/Genetic-Algorithm-Guide-[Tom-Mathew].pdf)
- Miyaji, M., Okazaki, K., & Ochiai, C. (2020). A study on the use of cyclone shelters in bangladesh. *Japan Architectural Review*, 3, 4. [10.1002/2475-8876.12177](https://doi.org/10.1002/2475-8876.12177)
- Opdyke, A., Bodo, D. D., & Smyth, J. (2024). Higher ground or into harm's way? household storm surge sheltering and evacuation plans. *International Journal of Disaster Risk Reduction*, 106. <https://doi.org/10.1016/j.ijdrr.2024.104452>
- Pereira, J. C., & de F.S.M. Russo, R. (2018). Design thinking integrated in agile software development: A systematic literature review. *Procedia Computer Science*, 138, 775–782. <https://doi.org/10.1016/j.procs.2018.10.101>
- Reyes-Estrope, C. (2021). Heavy rainfall submerge 35 bulacan villages in floodwater.
- Shakibamaesh, A. (2015). Public shelters: Towards secure urban planning and designing in terms of passive defense. *GEOGRAFIA Online*, 11, 01–Sep. <https://journalarticle.ukm.my/9219/1/1x.geografia-mac15-amir-bi-edam.pdf>
- Wang, Y., & Xu, Z. (2022). A multi-objective location decision making model for emergency shelters giving priority to subjective evaluation of residents.

- INTERNATIONAL JOURNAL OF COMPUTERS COMMUNICATIONS & CONTROL*, 17. <https://doi.org/10.15837/ijccc.2022.4.4749>
- Wirsansky, E. (2020). *Hands-on genetic algorithms with python: Applying genetic algorithms to solve real-world deep learning and artificial intelligence problems*. Packt Publishing Ltd.
- Yin, Y., Zhao, X., & Lv, W. (2023). Emergency shelter allocation planning technology for large-scale evacuation based on quantum genetic algorithm. *Front. Public Health*, 10. <https://doi.org/10.3389/fpubh.2022.1098675>
- Zhao, X., Coates, G., & Xu, W. (2019). A hierarchical mathematical model of the earthquake shelter location-allocation problem solved using an interleaved mpso-ga. *Geomatics, Natural Hazards and Risk*, 10, 1712–1737. <https://doi.org/10.1080/19475705.2019.1609605>

## APPENDICES

**APPENDIX A**  
**EVALUATION RESULTS**

**Table A.1**  
*End-Users Evaluation*

Statement	Mean	SD
<i>Perceived Usefulness</i>		
The system is modular and easy to modify with well-defined and independent components.	8.60	1.14
The system components can be reused in other contexts with reusable libraries or modules.	9.60	0.55
The system is easy to analyze for defects with tools to support analysis.	9.20	0.84
The system is easy to modify and update with documented and manageable changes.	9.00	1.00
The system is easy to test with automated testing tools available.	9.80	0.45
<i>Perceived Ease of Use</i>		
Learning to operate the system is easy for me.	9.39	0.58
The system is easy to use.	9.39	0.58
My interaction with the system is clear and understandable.	9.43	0.66
I find it easy to become skillful at using the system.	9.61	0.58
I find the system easy to operate.	9.52	0.59
<i>Attitude Towards Using</i>		
I have a positive attitude towards using the system.	9.52	0.59
I enjoy using the system.	9.39	0.58
I am satisfied with using the system.	9.52	0.59
<i>Behavioral Intention to Use</i>		
I intend to use the system regularly.	9.30	0.70
I will continue to use the system in the future.	9.30	0.70
I would recommend the system to others.	9.61	0.58

**Table A.2**  
*IT Experts Evaluation*

Statement	Mean	SD
<i>Functional Suitability</i>		
The system provides all the required functions without any missing functionalities.	9.80	0.45
The functions are implemented correctly without any errors.	10.00	0
The functions are appropriate for the tasks and meet user needs effectively.	9.60	0.55
<i>Performance Efficiency</i>		
The system responds within acceptable time limits and maintains consistent response time under different conditions.	9.60	0.55
The resource usage is within acceptable limits and the system efficiently uses available resources.	9.60	0.55
The system can handle the expected load and is scalable to accommodate future growth.	9.80	0.45
<i>Compatibility</i>		
The system can coexist with other systems without conflict and has no compatibility issues.	8.88	1.30
The system can interact with other systems as required and data exchange between systems is seamless.	9.20	0.84
<i>Interaction Capability</i>		
The purpose of the system is easily recognizable and the functions are easy to understand.	9.20	0.84
The system is easy to learn for new users and there are adequate training materials available.	9.60	0.55
The system is easy to operate with intuitive and user-friendly controls.	9.60	0.55
The system protects users from making errors and provides clear and helpful error messages.	9.20	0.45
The user interface is aesthetically pleasing with a consistent and professional design.	9.80	0.45

Table A.2 – continued


<b>Statement</b>	<b>Mean</b>	<b>SD</b>
The system is accessible to users with disabilities and includes features to support accessibility.	8.60	0.55
<i>Reliability</i>		
The system is mature and stable with no frequent crashes or failures.	9.80	0.45
The system is available when needed with no downtime issues.	9.00	0.71
The system can tolerate faults and continue operating with mechanisms for fault detection and recovery.	9.80	0.45
The system can recover from failures quickly with backup and recovery procedures in place.	9.80	0.45
<i>Security</i>		
The system ensures the confidentiality of data with measures to protect sensitive information.	9.60	0.55
The system ensures the integrity of data with mechanisms to prevent data corruption.	9.80	0.45
The system can verify the identity of users and actions are traceable to specific users.	9.20	0.84
The system provides accountability for actions with maintained logs and audit trails.	9.20	0.84
The system verifies the authenticity of data and users with measures to prevent unauthorized access.	8.80	1.30
<i>Maintainability</i>		
The system is modular and easy to modify with well-defined and independent components.	8.60	1.14
The system components can be reused in other contexts with reusable libraries or modules.	9.60	0.55
The system is easy to analyze for defects with tools to support analysis.	9.20	0.84
The system is easy to modify and update with documented and manageable changes.	9.00	1.00
The system is easy to test with automated testing tools available.	9.80	0.45

Table A.2 – continued

<b>Statement</b>	<b>Mean</b>	<b>SD</b>
<i>Flexibility</i>		
The system can be adapted to different environments with configuration options available.	8.80	1.10
The system can scale to meet increased demand with mechanisms to support scalability.	9.40	0.55
The system is easy to install with clear and straightforward installation procedures.	10.00	0.00
The system can be easily replaced with another system with procedures for system replacement in place.	9.80	0.45


**APPENDIX B**  
**SYSTEM FLOW CHART**

**Figure B.1**  
*Genetic Algorithm*

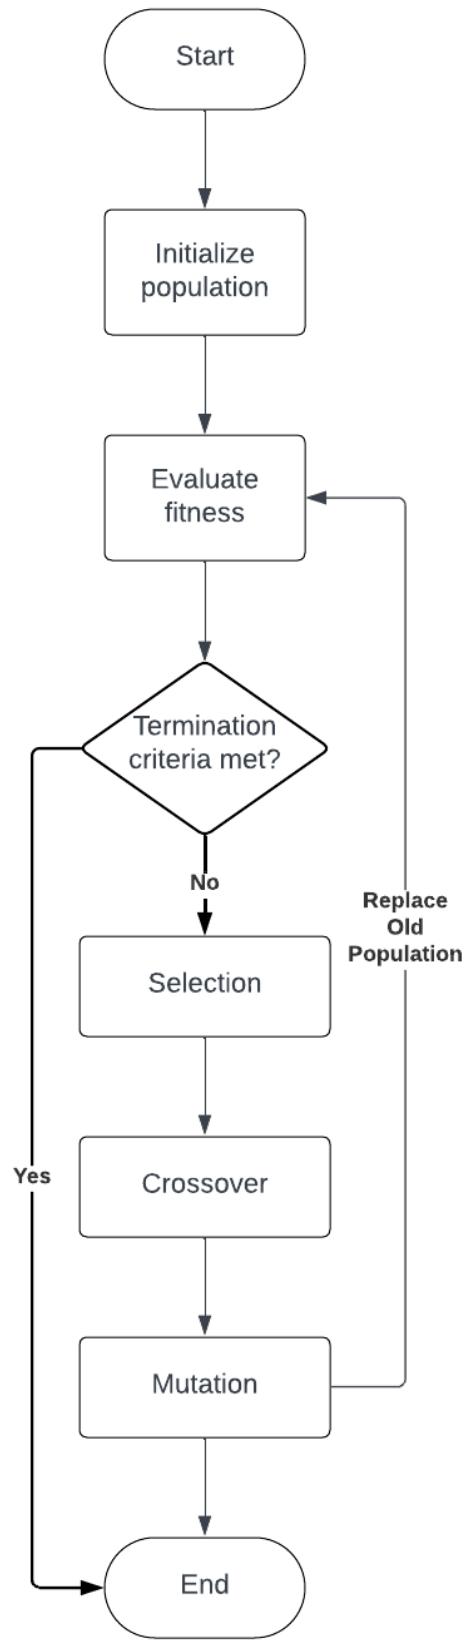


**Figure B.2**

*Genetic Algorithm - Selection*

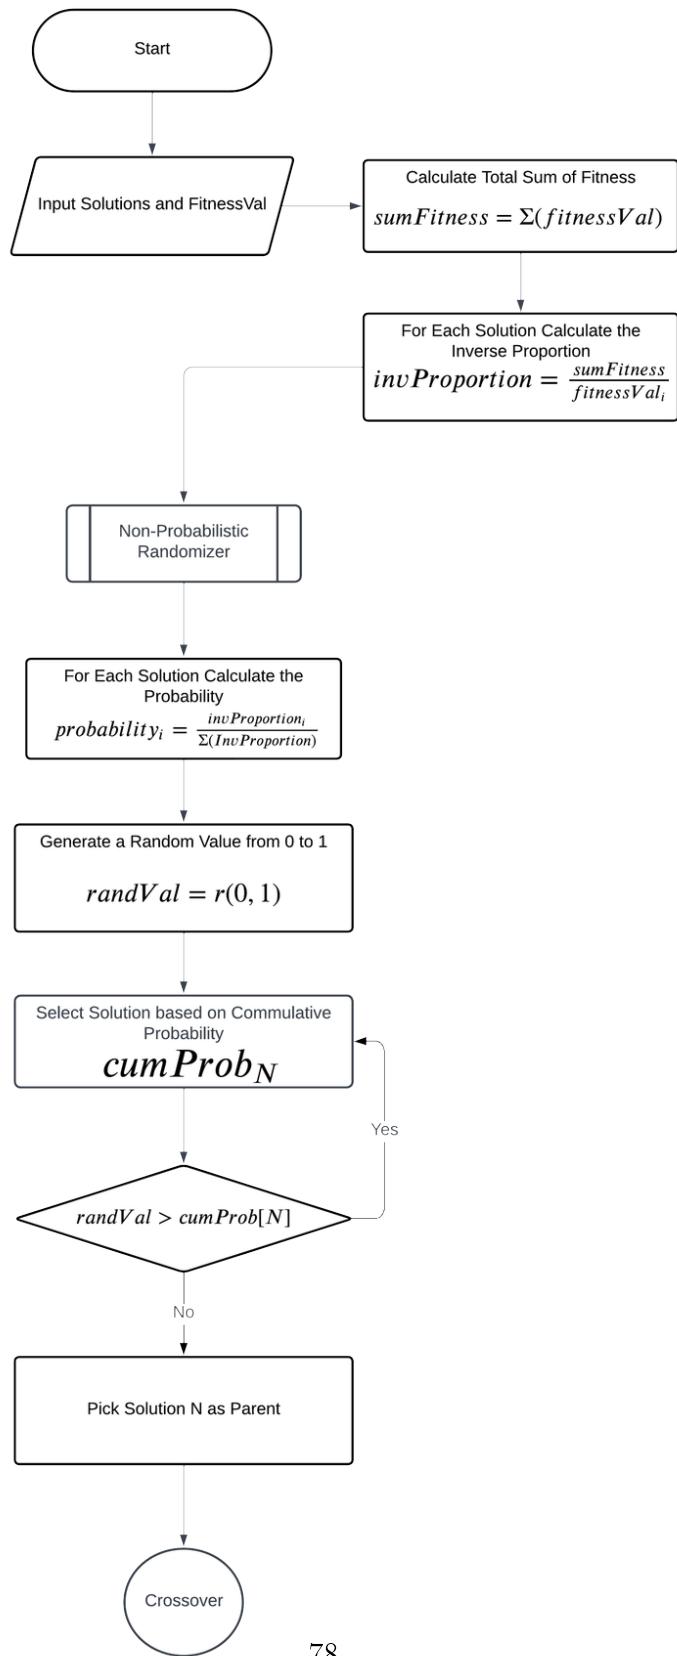


**Figure B.3**


*Genetic Algorithm - Crossover*

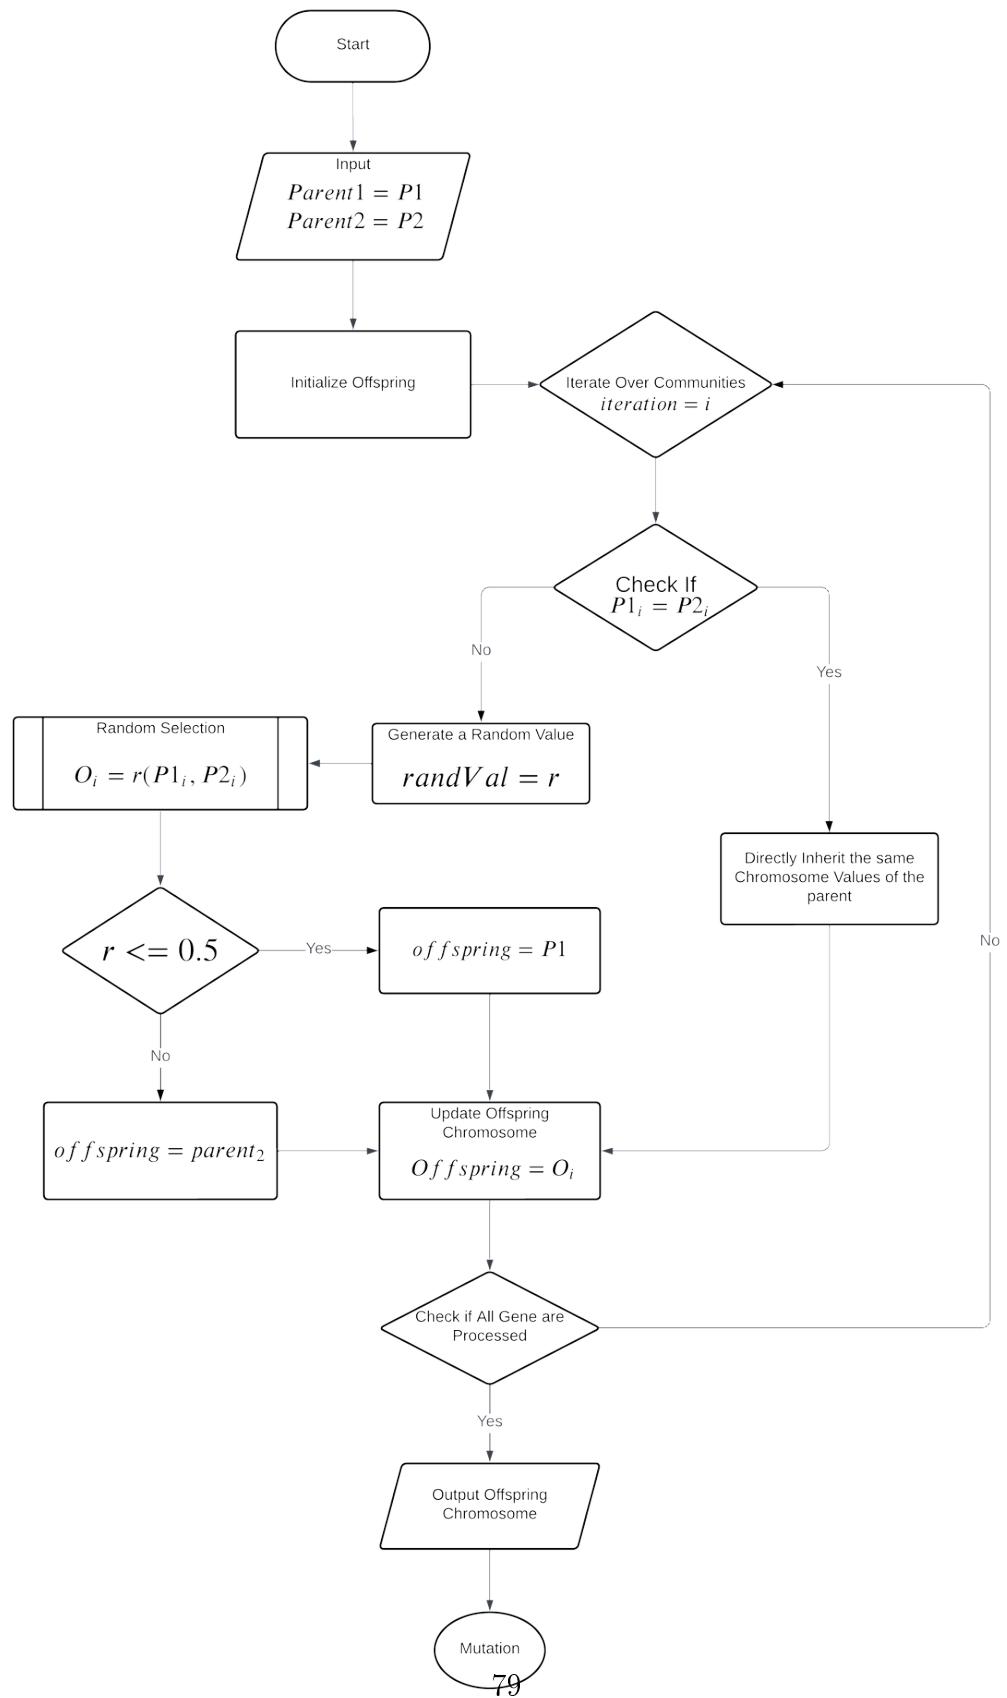


**Figure B.4**  
*Genetic Algorithm - Mutation*

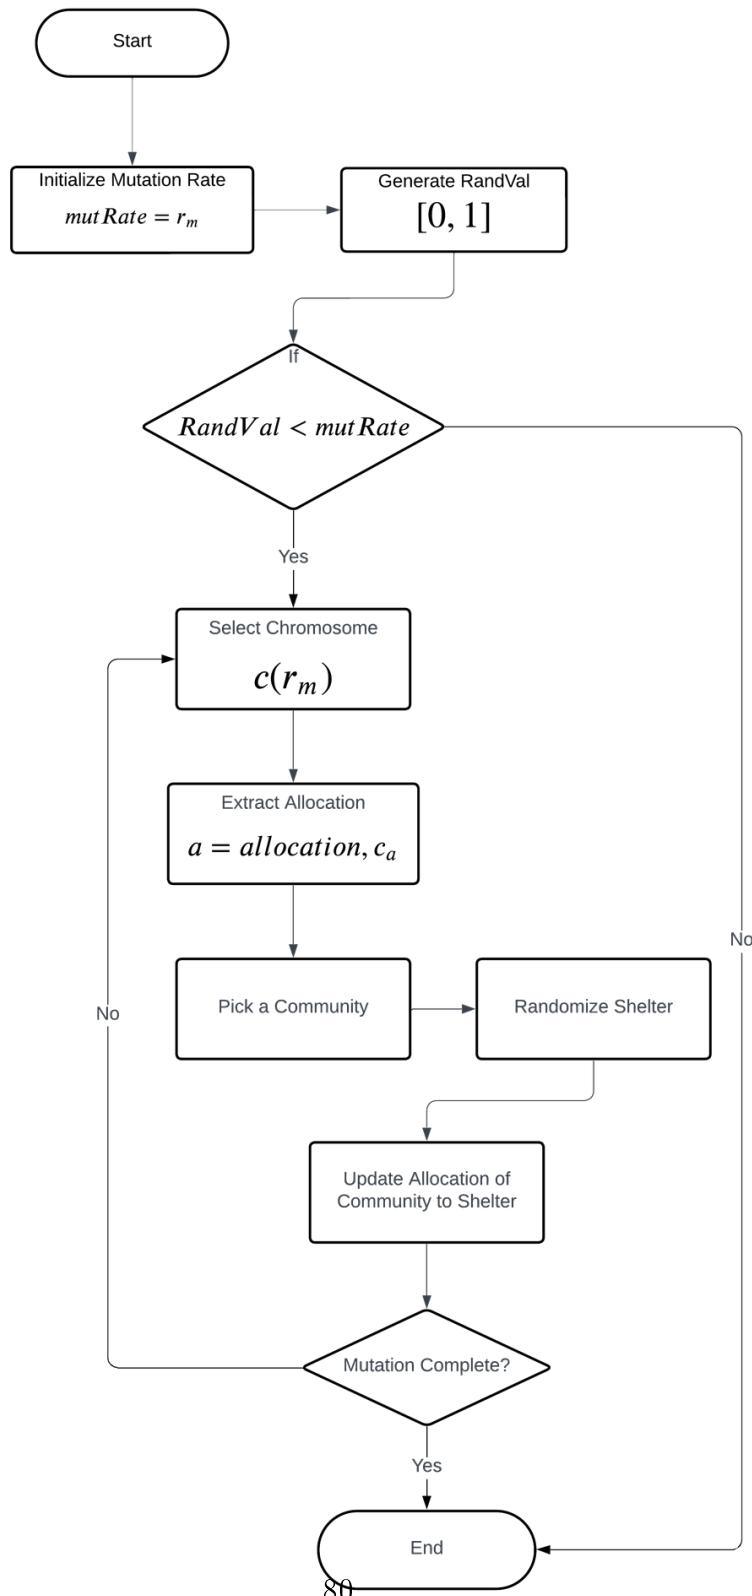


**Figure B.5**  
*Data Modification Feature*

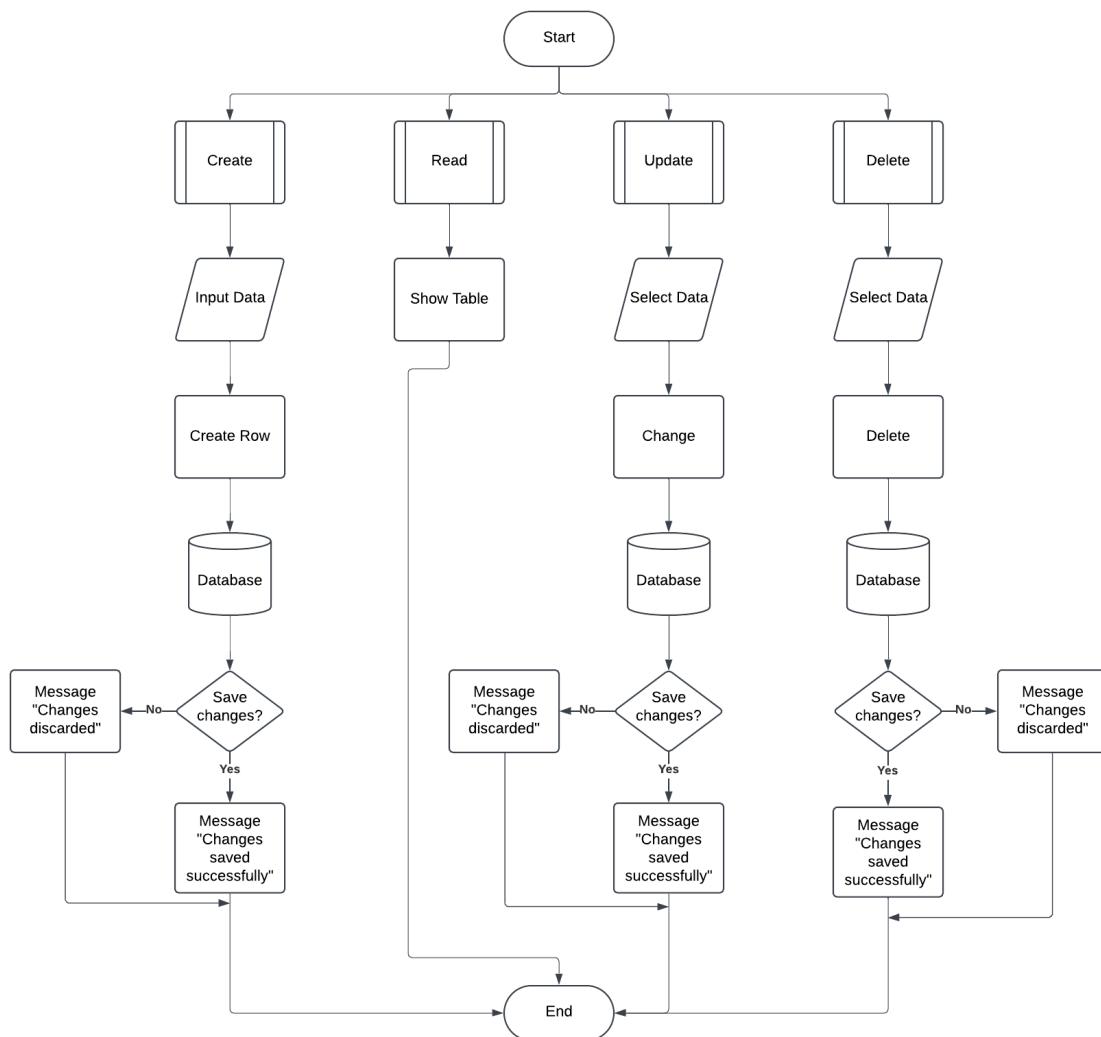


**Figure B.6**  
*Model Modification Feature*

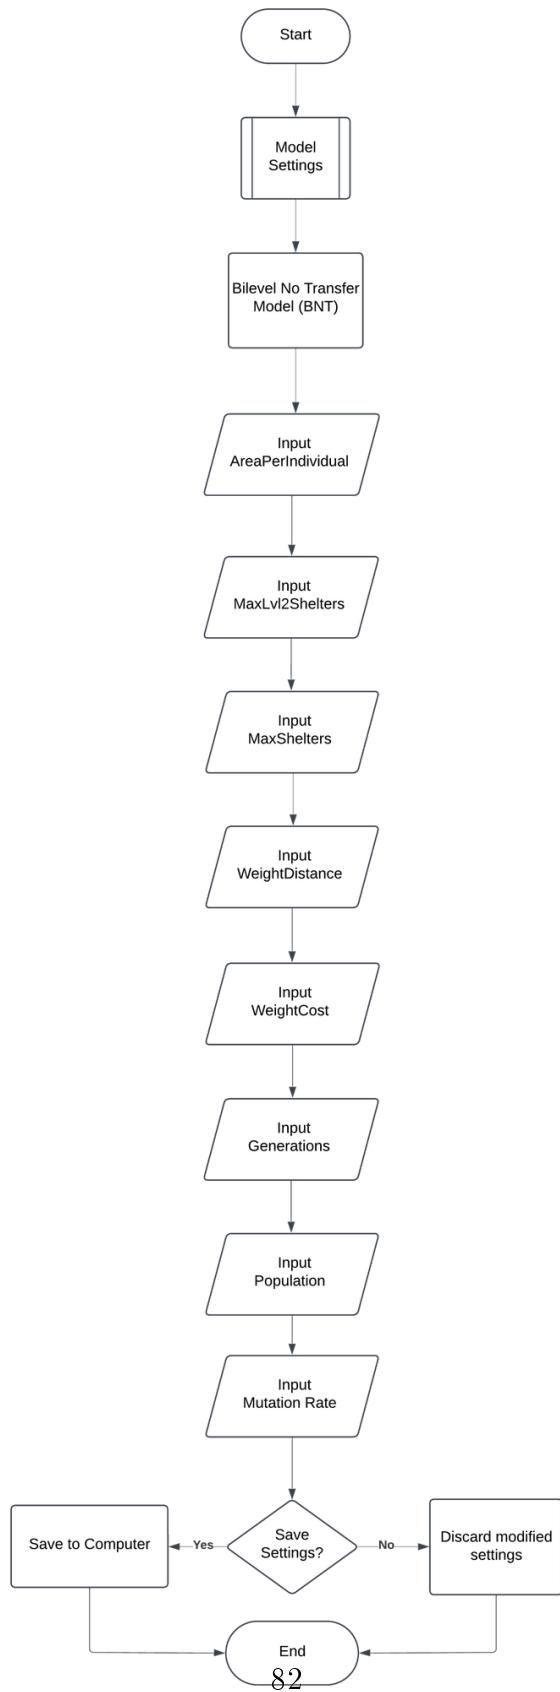


**Figure B.7**  
*Data Simulation Feature*

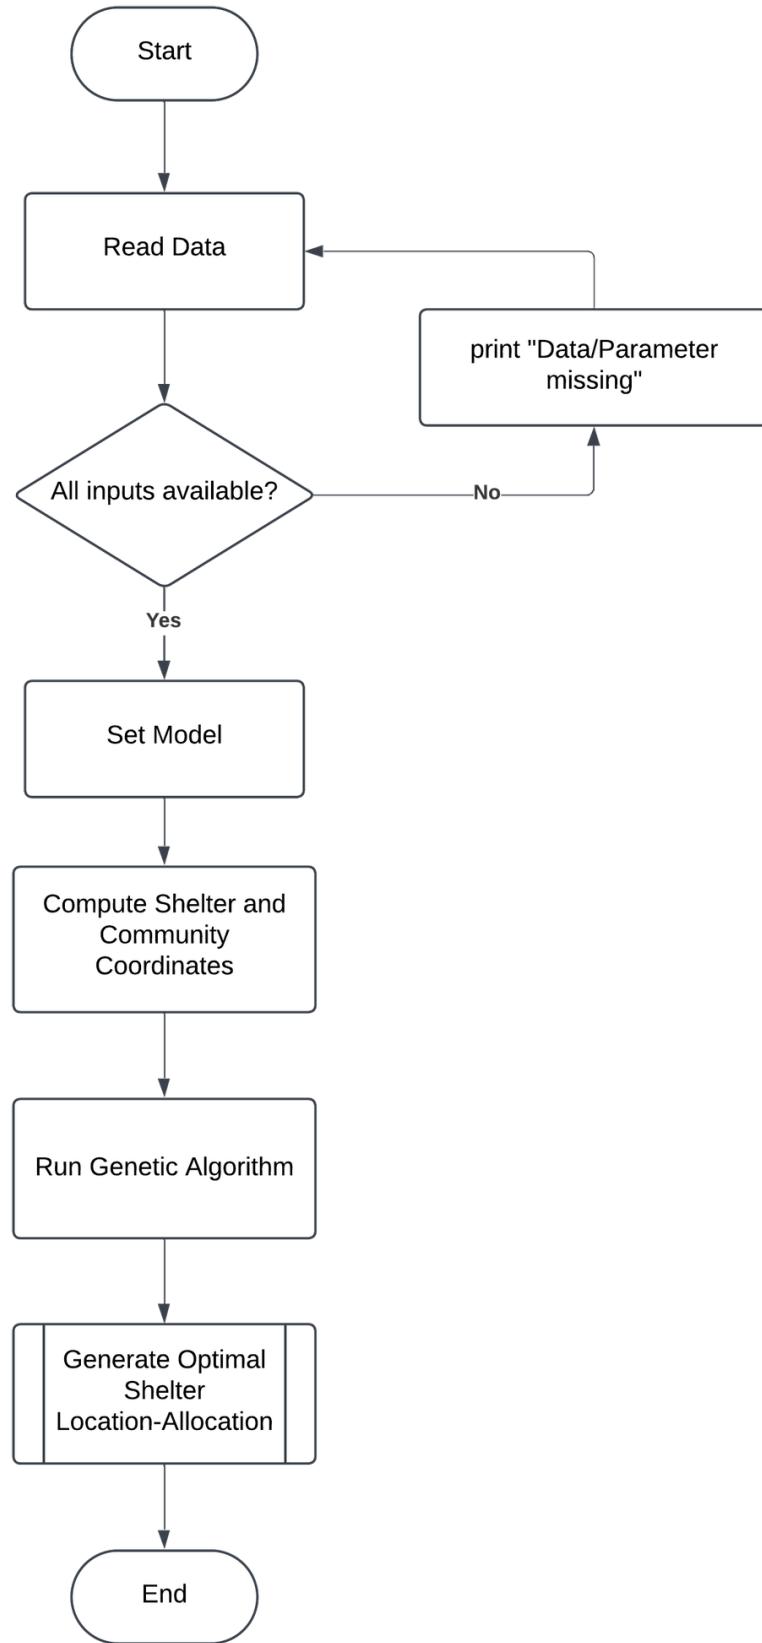

**Figure B.8**  
*Shelter Tagging Feature*

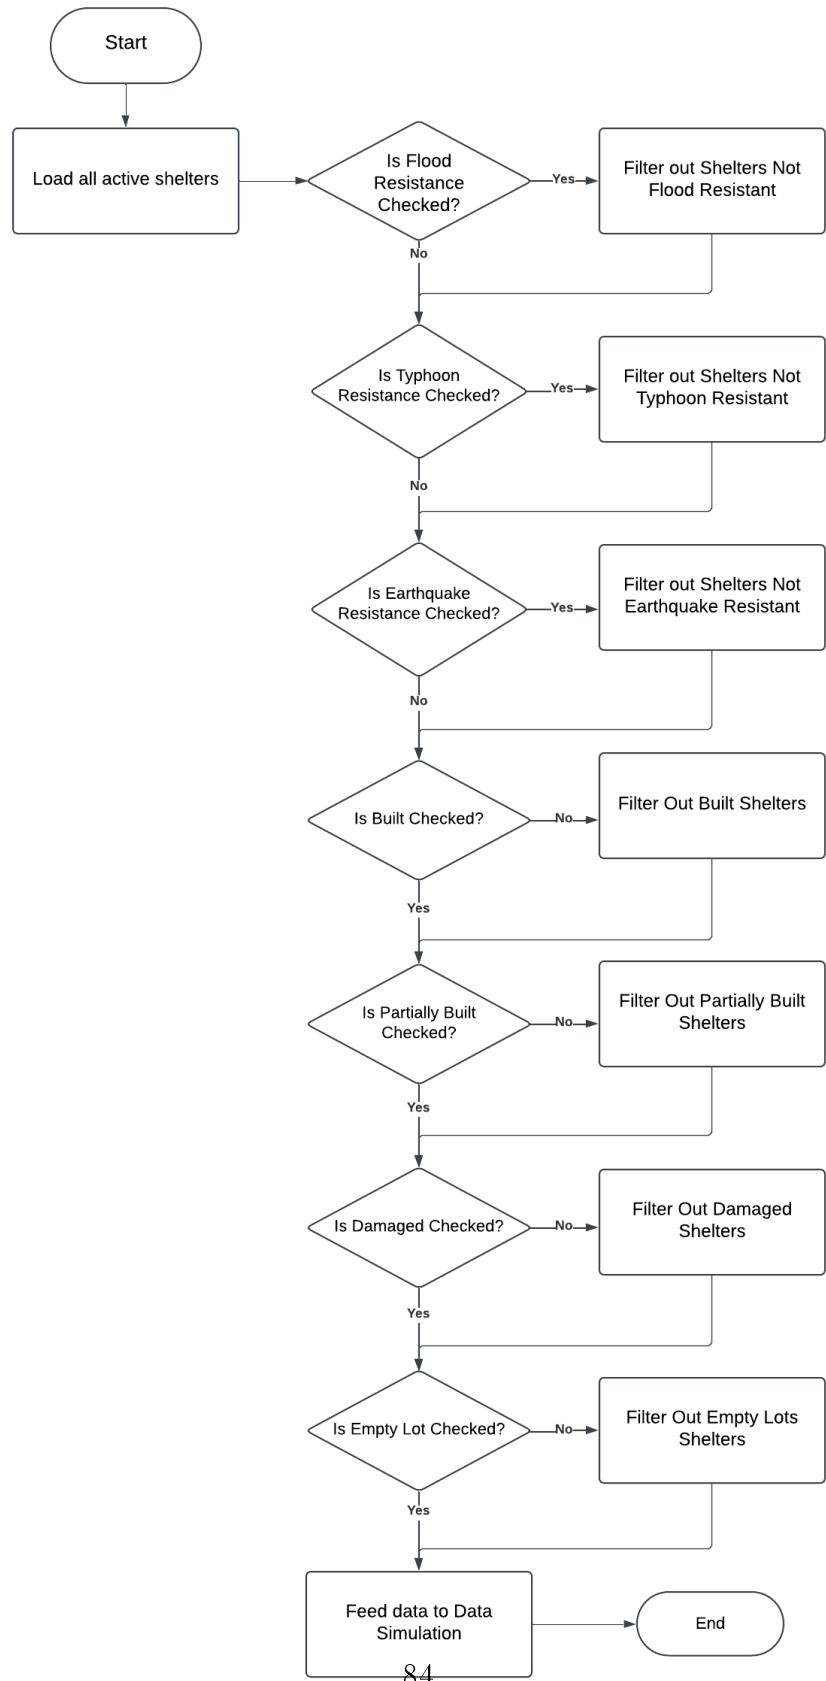

**Figure B.9**  
*Report Protection Feature*

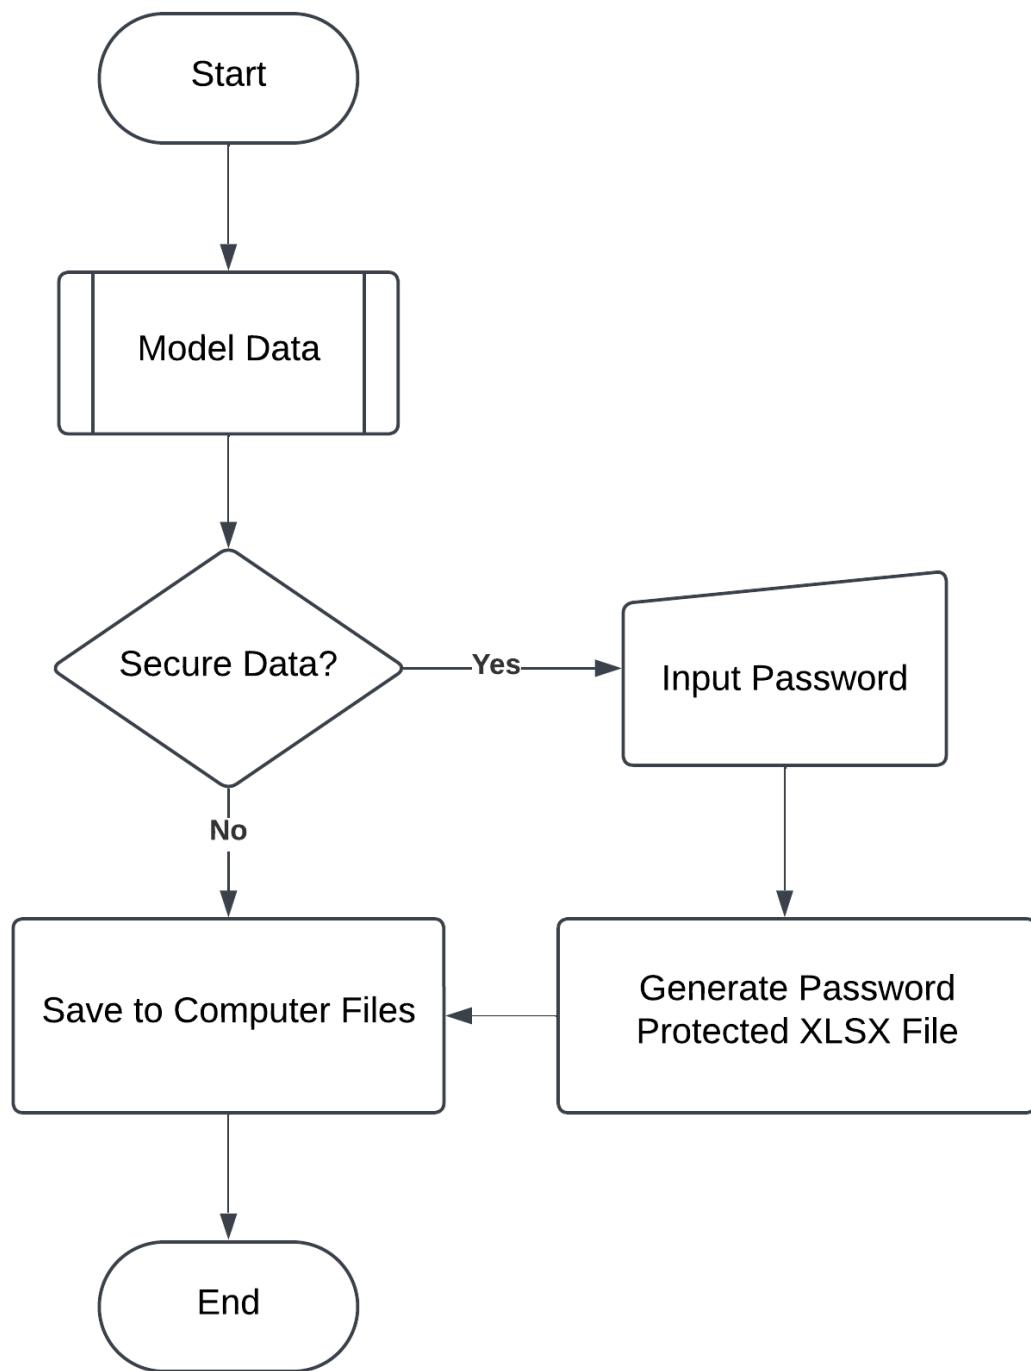

**APPENDIX C**  
**RELEVANT CODES**

Listing C.1: Genetic Algorithm

```

1 generation_last_updated = 0
2
3 for _ in range(num_solutions):
4     solution = spawn()
5     solutions.append(solution)
6
7 # generations
8 for generation in range(num_generations):
9     # check for cancellation
10    if self.cancelled:
11        self.progress_dialog("Genetic algorithm cancelled.")
12        return
13
14    # sorting from best to worst solutions
15    ranked_solutions = [(fitness(sol), sol) for sol in solutions]
16    ranked_solutions.sort(key=lambda x: x[0])
17    ↪aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa
18
19    # initiate selection and crossover
20    new_population = []
21    for i in range(num_solutions):
22        mother = selectParent(ranked_solutions)[1]
23        father = selectParent(ranked_solutions)[1]
24
25        offspring = generate_offspring(mother, father)
26        new_population.append(offspring)
27
28    # initiate mutation
29    mutated_population = []
30    for solution in new_population:
31        if random.random() < mutation_rate:
32            solution = mutate(solution)
33            mutated_population.append((fitness(solution), solution))
34
35    # getting the top half solutions
36    best_solutions = mutated_population + ranked_solutions
37    best_solutions = sorted(best_solutions, key=lambda x: x[0])[:num_solutions]
38
39    if (generation+1) % 100 == 0 :
40        self.progress_dialog(str(best_solutions[0]))
41        print(best_solutions[0])
42        self.progress_dialog(f"==> Gen {generation+1} best solution")
43        ↪ ===")
44        print(f"==> Gen {generation+1} best solution ===")
45
46    prev_best_solution = fitness(solutions[0])
47
48    # replace old population
49    solutions = [sol[1] for sol in best_solutions]
50
51    new_best_solution = fitness(solutions[0])
52
53    #update generation_last_updated
54    if(prev_best_solution != new_best_solution):
55        generation_last_updated = generation+1

```

Listing C.2: Genetic Algorithm - Selection

```

1 def selectParent(solutions):
2     sum_fitness = sum(fitness for fitness, _ in solutions)
3     inv_proportions = [sum_fitness / fitness for fitness, _ in
4         ↪ solutions]
5     sum_inv_proportions = sum(inv_proportions)
6     probability = [inv_proportion / sum_inv_proportions for
7         ↪ inv_proportion in inv_proportions]
8     solution_indices = np.arange(len(solutions))
9
10    selected_solution = np.random.choice(solution_indices, p=
11        ↪ probability)
12
13    return solutions[selected_solution]

```

Listing C.3: Genetic Algorithm - Crossover

```

1 def generate_offspring(parent1, parent2):
2     offspring = {"initial": {}, "shelterlvl": {}}
3     for community in Community:
4         #for initial
5         shelters = {parent1["initial"][community["name"]], parent2[""
6             ↪ initial"][community["name"]]}
7
8         if shelters:
9             chosen_shelter = random.choice(list(shelters))
10            else:
11                chosen_shelter = random.choice([shelter["name"] for
12                    ↪ shelter in Shelters])
13
14            offspring["initial"][community["name"]] = chosen_shelter
15
16            for shelter in Shelters:
17
18                #for shelterlvl
19                levels = {parent1["shelterlvl"][shelter["name"]], parent2[""
20                    ↪ shelterlvl"][shelter["name"]]}
21
22                if shelters:
23                    chosen_lvl = random.choice(list(levels))
24                else:
25                    chosen_lvl = random.choice([1, 2])
26
27                offspring["shelterlvl"][shelter["name"]] = chosen_lvl
28
29            return offspring

```

Listing C.4: Genetic Algorithm - Mutation

```
1 def mutate(allocation):
2     new_allocations = copy.deepcopy(allocation)
3
4     for _ in range(mutation_iteration) :
5         key_rand = random.choice(list(allocation.keys()))
6         gene_to_mutate = random.choice(list(allocation[key_rand].
7             ↪ keys()))
8         current_value = allocation[key_rand][gene_to_mutate]
9
10        if key_rand == "initial" or key_rand == "transferred":
11            available_choices = [shelter["name"] for shelter in
12             ↪ Shelters if shelter["name"] != current_value]
13        elif key_rand == "shelterlvl":
14            available_choices = [1,2]
15            available_choices.remove(current_value)
16
17        if available_choices:
18            new_value = random.choice(available_choices)
19            new_allocations[key_rand][gene_to_mutate] = new_value
20
21    return new_allocations
```

Listing C.5: Objective Value

```

1 def fitness(allocation):
2     initial_shelters = set(allocation['initial'].values())
3     Shelters_dict = {shelter["name"]: shelter for shelter in
4         ↪ Shelters}
5
6     total_distance = 0
7     total_cost = 0
8
9     for community in Community:
10         # add distance * population
11         shelter_name = allocation["initial"][community["name"]]
12         distance = community["distances"][shelter_name]
13         total_distance += distance * community["population"]
14
15     for shelter_name in initial_shelters:
16         # add cost based on shelter level
17         shelter = Shelters_dict.get(shelter_name)
18         if (allocation["shelterlvl"][shelter_name] == 1):
19             total_cost += shelter["cost1"]
20         elif (allocation["shelterlvl"][shelter_name] == 2):
21             total_cost += shelter["cost2"]
22         else:
23             print("Shelter exceeded 2 levels. Something is wrong")
24
25     # the actual model
26     objective_value = weight_dist * total_distance + weight_cost *
27     ↪ total_cost
28     penalty_value = penalty_constant * getPenaltySum(allocation)
29
30     # handle division by zero
31     if objective_value + penalty_value == 0:
32         return 1
33
34     return int(objective_value + penalty_value)

```

Listing C.6: Maximum Distance Constraint

```

1 def check_max_distance(allocation):
2     penalty = 0
3
4     for community in Community:
5         shelter_name = allocation["initial"][community["name"]]
6         distance = community["distances"][shelter_name]
7         max_distance_community = community["maxdistance"]
8         # check if distance is greater than max dist
9         if (distance > max_distance_community):
10             print("maximum distance constraint failed")
11             penalty += distance - max_distance_community
12
13     return penalty

```

Listing C.7: Capacity Constraint

```

1 def check_initial_capacity(allocation):
2     shelter_areas = {shelter["name"]: shelter[f"area{allocation['"
3         ↪ shelterlvl']}[{shelter['name']}]]"] for shelter in Shelters}
4     used_area = {shelter["name"]: 0 for shelter in Shelters}
5
6     penalty = 0
7
8     for community in Community:
9         shelter_name = allocation["initial"][community["name"]]
10        if shelter_name:
11            # add to used_area based on population
12            required_area = community["population"] *
13            ↪ area_per_individual
14            used_area[shelter_name] += required_area
15
16            if used_area[shelter_name] > shelter_areas[shelter_name]
17            ↪ ]:
18                print("initial capacity constraint failed")
19
20        for shelter in Shelters:
21            shelter_name = shelter["name"]
22            penalty_value = used_area[shelter_name] - shelter_areas[
23            ↪ shelter_name]
24            penalty += max(0,penalty_value)
25
26    return penalty

```

Listing C.8: Maximum Shelter Constraint

```

1 def check_max_shelters(allocation):
2     used_shelters = set()
3     penalty = 0
4
5     for community in Community:
6         shelter_name = allocation["initial"][community["name"]]
7         used_shelters.add(shelter_name)
8
9     # If the number of unique shelters exceeds the max allowed
10    if len(used_shelters) > max_shelters:
11        print("max shelters constraint failed")
12        penalty += len(used_shelters) - max_shelters
13
14    return penalty

```

Listing C.9: Maximum Level 2 Shelter Constraint

```
1 def check_max_lvl2_shelters(allocation):
2     lvl2_shelters_ctr = sum(1 for level in allocation["shelterlvl"].
3     ↪ values() if level == 2)
4     penalty = 0
5
6     if lvl2_shelters_ctr > max_lvl2_shelters:
7         print("max lvl2 shelters constraint failed")
8         penalty += lvl2_shelters_ctr - max_lvl2_shelters
9
10    return penalty
```

**APPENDIX D**  
**LETTERS**



REPUBLIC OF THE PHILIPPINES  
BULACAN STATE UNIVERSITY

# COLLEGE OF SCIENCE



Level III  
Mastery in Quality Management  
2022



Quality Management System  
ISO 9001:2015 Certified



Times Higher Education  
Impact Rankings 2023



Certified  
Dark Green School



February 19, 2025

**Hon. Glorime M. Faustino**

Mayor

Municipality of Calumpit, Bulacan

**Dear Mayor Faustino,**

Good day! We are writing to formally request a meeting with the Municipal Disaster Risk Reduction Management Office (MDRRMO) to present a project that aims to enhance disaster preparedness and optimize shelter location-allocation in some areas in Calumpit. We would also like to request your participation in our survey in the evaluation of our system.

As you may be aware, the Philippines was ranked as the most disaster-prone country in the World Risk Index 2024. It faces a wide range of natural disasters annually since it is located within the typhoon belt and the "Pacific Ring of Fire". Some areas in Bulacan are particularly vulnerable to typhoons and floods. Thus, efficient shelter allocation is crucial in such areas, as it directly affects the safety and well-being of the population during disasters.

In extension of this ongoing project, my research team and I developed a system that utilizes genetic algorithm to optimize shelter allocation based on factors such as accessibility, cost-efficiency, and community proximity. This decision-support tool aims to provide the local government units of Bulacan with data-driven solutions to improve their disaster preparedness and response strategies.

The primary objective of the proposed meeting is to present this project and seek the support of the provincial government for its completion. Since the system was completed, we would be grateful for you to participate and provide valuable feedback to assess the system quality by showing the demo of the system and asking you to fill up a survey. We might need to have at least **16 participants** for this system and if possible, we would like to hold the meeting itself either on **February 26 or 27, 2025**.

Your support will be instrumental in the successful implementation of this project, which seeks to benefit not only the local government and its disaster response mechanisms but also the citizens of Calumpit.

We would greatly appreciate your consideration of this request and look forward to discussing how this project can enhance disaster management in Calumpit. Please let us know your availability for the proposed meeting at your earliest convenience.

Thank you for your time and attention. We look forward to your favorable response.

Respectfully yours,

**VALENTINE BLEZ L. LAMPAYAN, Ph.D.**

Chair, Mathematics Department



REPUBLIC OF THE PHILIPPINES  
BULACAN STATE UNIVERSITY

# COLLEGE OF SCIENCE



Level III  
Mastery in Quality Management  
2022



Quality Management System  
ISO 9001:2015 Certified



Times Higher Education  
Impact Rankings 2023



Certified  
Dark Green School



February 19, 2025

**Hon. Glorime M. Faustino**

Mayor

Municipality of Calumpit, Bulacan

**Dear Mayor Faustino,**

Good day! We are writing to formally request a meeting with the Municipal Social Welfare Development Office (MSWDO) to present a project that aims to enhance disaster preparedness and optimize shelter location-allocation in some areas in Calumpit. We would also like to request your participation in our survey in the evaluation of our system.

As you may be aware, the Philippines was ranked as the most disaster-prone country in the World Risk Index 2024. It faces a wide range of natural disasters annually since it is located within the typhoon belt and the "Pacific Ring of Fire". Some areas in Bulacan are particularly vulnerable to typhoons and floods. Thus, efficient shelter allocation is crucial in such areas, as it directly affects the safety and well-being of the population during disasters.

In extension of this ongoing project, my research team and I developed a system that utilizes genetic algorithm to optimize shelter allocation based on factors such as accessibility, cost-efficiency, and community proximity. This decision-support tool aims to provide the local government units of Bulacan with data-driven solutions to improve their disaster preparedness and response strategies.

The primary objective of the proposed meeting is to present this project and seek the support of the provincial government for its completion. Since the system was completed, we would be grateful for you to participate and provide valuable feedback to assess the system quality by showing the demo of the system and asking you to fill up a survey. We might need to have at least **8 participants** for this system and if possible, we would like to hold the meeting itself either on **February 26 or 27, 2025**.

Your support will be instrumental in the successful implementation of this project, which seeks to benefit not only the local government and its disaster response mechanisms but also the citizens of Calumpit.

We would greatly appreciate your consideration of this request and look forward to discussing how this project can enhance disaster management in Calumpit. Please let us know your availability for the proposed meeting at your earliest convenience.

Thank you for your time and attention. We look forward to your favorable response.

Respectfully yours,

**VALENTINE BLEZ L. LAMPAYAN, Ph.D.**

Chair, Mathematics Department



Republic of the Philippines  
City of Malolos, Bulacan

# BULACAN STATE UNIVERSITY COLLEGE OF SCIENCE



Level III  
Mastery in Quality Management  
2022



Quality Management System  
ISO 9001:2015 Certified



Times Higher Education  
Impact Rankings 2023



Certified  
Dark Green School

2 December 2024,

Dr. Jayson Victoriano

Faculty, College of Information and Communication Technology  
Bulacan State University

Dear Dr. Victoriano,

Greetings!

Our senior BS Mathematics students with a specialization in Computer Science are currently engaged in their Undergraduate Thesis, which aims to develop their technical skills by applying various mathematical concepts and/or programming languages and systems tools applications. Their research projects typically involve either a mathematical exposition applying mathematical concepts in model formulation, finding solutions to real-life problems, or developing a programmed system to address these problems. As a requirement for the course, they ought to complete their thesis proposal (Chapters 1 – 3) before the end of the first semester of the current school year.

In this regard, we would be honored if you could join us as one of the panel evaluators for the thesis titled

*Design and Implementation of a Shelter Location-Allocation System in Calumpit, Bulacan*

The group is composed of the following researchers:

Bryan Jett T. Calulo,

Elijah Iñigo C. Fabian,

Lovely Angeline OL-Cunanan

and the proposal defense is scheduled to take place on

December 10, 2024, 8:15AM at the CS Conference Room.

officeofthedean.cs@bulsu.edu.ph | 919-7800 local 1044

Bulacan State University Main Campus, Capitol Compound, McArthur Highway, Guinhawa, City of Malolos Bulacan



Republic of the Philippines  
City of Malolos, Bulacan

# BULACAN STATE UNIVERSITY

## COLLEGE OF SCIENCE



Quality Management System  
ISO 9001:2015 Certified



Times Higher Education  
Impact Rankings 2023



As a panel evaluator, your responsibilities will include:

1. Reviewing the thesis proposal document.
2. Providing constructive feedback and suggestions to the students.
3. Evaluating the feasibility and academic rigor of the proposed research.
4. Assessing the students' presentation and defense of their proposal.

Your expertise and insights would be invaluable to the students and greatly contribute to the quality of their research. We sincerely hope that you will consider this request favorably.

Please let us know at your earliest convenience if you are able to accept this invitation.

Thank you for your time and consideration.

Sincerely,

Harris R. Dela Cruz  
Thesis Instructor

I have read the responsibilities and expectations outlined and

- I agree to serve as a panel evaluator for this group.  
 I declined to serve as a panel evaluator for this group.

Signature over Printed Name

Date: \_\_\_\_\_



Republic of the Philippines  
City of Malolos, Bulacan

# BULACAN STATE UNIVERSITY COLLEGE OF SCIENCE



Level III  
Mastery in Quality Management  
2022



Quality Management System  
ISO 9001:2015 Certified



Times Higher Education  
Impact Rankings 2023



Certified  
Dark Green School

2 December 2024,

**Aarhus M. Dela Cruz**  
Faculty, College of Science  
Bulacan State University

Dear Mr. Dela Cruz,

Greetings!

Our senior BS Mathematics students with a specialization in Computer Science are currently engaged in their Undergraduate Thesis, which aims to develop their technical skills by applying various mathematical concepts and/or programming languages and systems tools applications. Their research projects typically involve either a mathematical exposition applying mathematical concepts in model formulation, finding solutions to real-life problems, or developing a programmed system to address these problems. As a requirement for the course, they ought to complete their thesis proposal (Chapters 1 – 3) before the end of the first semester of the current school year.

In this regard, we would be honored if you could join us as one of the panel evaluators for the thesis titled

*Design and Implementation of a Shelter Location-Allocation System in Calumpit, Bulacan*

The group is composed of the following researchers:

Bryan Jett T. Calulo,

Elijah Iñigo C. Fabian,

Lovely Angeline OL-Cunanan

and the proposal defense is scheduled to take place on

**December 10, 2024, 8:15AM at the CS Conference Room.**

officeofthedean.cs@bulsu.edu.ph | 919-7800 local 1044  
Bulacan State University Main Campus, Capitol Compound, McArthur Highway, Guinhawa, City of Malolos Bulacan



Republic of the Philippines  
City of Malolos, Bulacan

# BULACAN STATE UNIVERSITY COLLEGE OF SCIENCE



Level III  
Mastery in Quality Management  
2022



Quality Management System  
ISO 9001:2015 Certified



Times Higher Education  
Impact Rankings 2023



Certified  
Dark Green School

As a panel evaluator, your responsibilities will include:

1. Reviewing the thesis proposal document.
2. Providing constructive feedback and suggestions to the students.
3. Evaluating the feasibility and academic rigor of the proposed research.
4. Assessing the students' presentation and defense of their proposal.

Your expertise and insights would be invaluable to the students and greatly contribute to the quality of their research. We sincerely hope that you will consider this request favorably.

Please let us know at your earliest convenience if you are able to accept this invitation.

Thank you for your time and consideration.

Sincerely,

Harris M. Dela Cruz  
Thesis Instructor

---

I have read the responsibilities and expectations outlined and

- I agreed to serve as a panel evaluator for this group.
- I declined to serve as a panel evaluator for this group.

Signature over Printed Name

Date: 11/01/2024



Republic of the Philippines  
City of Malolos, Bulacan

# BULACAN STATE UNIVERSITY COLLEGE OF SCIENCE



Level III  
Mastery in Quality Management  
2022



Quality Management System  
ISO 9001:2015 Certified



Times Higher Education  
Impact Rankings 2023



Certified  
Dark Green School

2 December 2024,

**Arcel F. Galvez**  
Faculty, College of Science  
Bulacan State University

Dear Mr. Galvez,

Greetings!

Our senior BS Mathematics students with a specialization in Computer Science are currently engaged in their Undergraduate Thesis, which aims to develop their technical skills by applying various mathematical concepts and/or programming languages and systems tools applications. Their research projects typically involve either a mathematical exposition applying mathematical concepts in model formulation, finding solutions to real-life problems, or developing a programmed system to address these problems. As a requirement for the course, they ought to complete their thesis proposal (Chapters 1 – 3) before the end of the first semester of the current school year.

In this regard, we would be honored if you could join us as one of the panel evaluators for the thesis titled

*Design and Implementation of a Shelter Location-Allocation System in Calumpit, Bulacan*

The group is composed of the following researchers:

Bryan Jett T. Calulo,

Elijah Iñigo C. Fabian,

Lovely Angeline OL-Cunanan

and the proposal defense is scheduled to take place on

**December 10, 2024, 8:15AM at the CS Conference Room.**

officeofthedean.cs@bulsu.edu.ph | 919-7800 local 1044  
Bulacan State University Main Campus, Capitol Compound, McArthur Highway, Guinhawa, City of Malolos Bulacan



Republic of the Philippines  
City of Malolos, Bulacan

# BULACAN STATE UNIVERSITY

## COLLEGE OF SCIENCE



Level III  
Mastery in Quality Management  
2022



Quality Management System  
ISO 9001:2015 Certified



Times Higher Education  
Impact Rankings 2023



Certified  
Dark Green School

As a panel evaluator, your responsibilities will include:

1. Reviewing the thesis proposal document.
2. Providing constructive feedback and suggestions to the students.
3. Evaluating the feasibility and academic rigor of the proposed research.
4. Assessing the students' presentation and defense of their proposal.

Your expertise and insights would be invaluable to the students and greatly contribute to the quality of their research. We sincerely hope that you will consider this request favorably.

Please let us know at your earliest convenience if you are able to accept this invitation.

Thank you for your time and consideration.

Sincerely,

Harris R. Dela Cruz  
Thesis Instructor

I have read the responsibilities and expectations outlined and

- I agree to serve as a panel evaluator for this group.  
 I declined to serve as a panel evaluator for this group.

ARCA F. GOMEZ

Signature over Printed Name

Date: 6 December 2024

**APPENDIX E**  
**INSTRUMENTS**

## Shelter Location-Allocation System Evaluation Survey

Name: \_\_\_\_\_

Designation: \_\_\_\_\_ Office/Department: \_\_\_\_\_

Field of Expertise: \_\_\_\_\_ Years of Experience: \_\_\_\_\_

*Instruction : Please pick a score below with the following statements about the Shelter Location-Allocation System.*

strongly disagree	1	2	3	4	5	6	7	8	9	10	strongly agree
----------------------	---	---	---	---	---	---	---	---	---	----	-------------------

Functional Suitability		Score (1-10)
1. The system provides all the required functions without any missing functionalities.		
2. The functions are implemented correctly without any errors.		
3. The functions are appropriate for the tasks and meet user needs effectively.		
Performance Efficiency		
1. The system responds within acceptable time limits and maintains consistent response time under different conditions.		
2. The resource usage is within acceptable limits and the system efficiently uses available resources.		
3. The system can handle the expected load and is scalable to accommodate future growth.		
Compatibility		
1. The system can coexist with other systems without conflict and has no compatibility issues.		
2. The system can interact with other systems as required and data exchange between systems is seamless.		
Interaction Capability		
1. The purpose of the system is easily recognizable and the functions are easy to understand.		
2. The system is easy to learn for new users and there are adequate training materials available.		

3. The system is easy to operate with intuitive and user-friendly controls.	
4. The system protects users from making errors and provides clear and helpful error messages.	
5. The user interface is aesthetically pleasing with a consistent and professional design.	
6. The system is accessible to users with disabilities and includes features to support accessibility.	
<b>Reliability</b>	
1. The system is mature and stable with no frequent crashes or failures.	
2. The system is available when needed with no downtime issues.	
3. The system can tolerate faults and continue operating with mechanisms for fault detection and recovery.	
4. The system can recover from failures quickly with backup and recovery procedures in place.	
<b>Security</b>	
1. The system ensures the confidentiality of data with measures to protect sensitive information.	
2. The system ensures the integrity of data with mechanisms to prevent data corruption.	
3. The system can verify the identity of users and actions are traceable to specific users.	
4. The system provides accountability for actions with maintained logs and audit trails.	
5. The system verifies the authenticity of data and users with measures to prevent unauthorized access.	
<b>Maintainability</b>	
1. The system is modular and easy to modify with well-defined and independent components.	
2. The system components can be reused in other contexts with reusable libraries or modules.	
3. The system is easy to analyze for defects with tools to support analysis.	

4. The system is easy to modify and update with documented and manageable changes.	
5. The system is easy to test with automated testing tools available.	
<b>Flexibility</b>	
1. The system can be adapted to different environments with configuration options available.	
2. The system can scale to meet increased demand with mechanisms to support scalability.	
3. The system is easy to install with clear and straightforward installation procedures.	
4. The system can be easily replaced with another system with procedures for system replacement in place.	

What do you consider to be the **main strength** of the system?

What do you consider to be the **main weakness** or areas for improvement in the system?

Do you have any specific **suggestions** for improving the system? Please provide any additional comments or suggestions for improvement:

#### Data Privacy and Signature Agreement

We ensure that all responses will be treated in absolute confidentiality in accordance with the Data Privacy Act of 2012. Your signature is solely required to ensure that your responses are unique and to prevent duplicate entries. By signing below, you acknowledge your participation in this survey.

Signature over Printed Name: \_\_\_\_\_ Date: \_\_\_\_\_

## Shelter Location-Allocation System Evaluation Survey

Name(Optional): \_\_\_\_\_ Office/Department: \_\_\_\_\_

*Instruction : Please pick a score below with the following statements about the Shelter Location-Allocation System.*

strongly disagree	1	2	3	4	5	6	7	8	9	10	strongly agree
----------------------	---	---	---	---	---	---	---	---	---	----	-------------------

Perceived Usefulness		Score (1-10)
1. Using the system improves my performance in completing tasks such as planning shelter locations for disaster response.		
2. The system helps me accomplish choosing shelter locations and assigning communities more quickly.		
3. The system increases my productivity.		
4. The system enhances my effectiveness in completing tasks such as in disaster strategic planning.		
5. Overall, I find the system useful in my job.		
Perceived Ease of Use		
1. Learning to operate the system is easy for me.		
2. The system is easy to use.		
3. My interaction with the system is clear and understandable.		
4. I find it easy to become skillful at using the system.		
5. I find the system easy to operate.		
Attitude Towards Using the System		
1. I have a positive attitude towards using the system.		
2. I enjoy using the system.		
3. I am satisfied with using the system.		

**Behavioral Intention to Use**

1. I intend to use the system regularly.	
2. I will continue to use the system in the future.	
3. I would recommend the system to others.	

Do you have any **comments or suggestions** for improving the system? Please provide any additional comments or suggestions for improvement:

**Data Privacy and Signature Agreement**

We ensure that all responses will be treated in absolute confidentiality in accordance with the Data Privacy Act of 2012. Your signature is solely required to ensure that your responses are unique and to prevent duplicate entries. By signing below, you acknowledge your participation in this survey.

Signature over Printed Name: \_\_\_\_\_ Date: \_\_\_\_\_

# CURRICULUM VITAE

# Bryan Jett T. Calulo

## BS Mathematics graduate

✉ bryanjettcalulo@gmail.com

📞 0915-112-0027

🌐 github.com/Lucianono

📍 Meycauayan, Bulacan, 3020



Dedicated and analytical Computer Science major with a strong foundation in Mathematics. Skilled in programming languages, and software development tools. Highly adept at leveraging mathematical thinking to solve complex problems and deliver efficient software solutions.

## Education

### Bulacan State University - College of Science (2021 - 2025)

Bachelor of Science in Mathematics with Specialization in Computer Science

- President's Lister
- Finalist - UP Stat-is-eeks
- Finalist - Math Wizards
- Top 8 - UPLB Code Wars
- Class Mayor BSM-CS 4A
- CS Band Keyboardist
- CS Band Marketing Lead
- DOST JLSS Scholar

## Experiences

### Reysan Photography Services | Graphic Designer & Operator

- Contributed to the family business specializing in photography and printing services, such as designing photographic layouts, and operating technical aspects of services.

### Direc Business Technologies Inc | Research & Development Intern

- Developed and finished web application featuring inventory and employee management, and IoT programming.

## Projects

### Maia: Posture, Break, Reminder App

- Developed a mobile app using Android Studio, published the app on Amazon Appstore, and monetized with Google AdSense

### Modeling and Detecting SMS Fraud in the Philippines using Machine Learning Research

- Conducted research on AI and mathematical modeling to detect SMS fraud, highlighting Filipino language messages, using Google Colab, with the model achieving a 99% accuracy score
- Recommended for local publication conference with the assistance of our research instructor

### An Equal Share (Hating Kapatid): Scale-themed GMTK Game Jam 2024 entry

- Planned and developed a game in 3 days from scratch which ranked top 25% overall among 7500 entries.

## Skills

**Programming Languages:** C/C++ • Java • C# • Python • HTML/CSS • JavaScript • PHP • MySQL • MATLAB

**Development Frameworks:** ASP.NET • PySide/PyQt • Express.js

**Software Development Tools:** Git/GitHub • Unity • Visual Studio • VS Code • Android Studio

**Soft Skills:** Team Work • Leadership • Adaptability • Arts & Design • Problem Solving

# Lovely Angeline OL. Cunanan

## BS Mathematics graduate

✉ angelcunanan15@gmail.com

📞 0926-364-3246

🌐 github.com/captainpandamonkey5

📍 Malolos, Bulacan, 3000



Highly motivated computer science major seeking a position to leverage technical, mathematical expertise, and passion for building innovative applications. Adept at front-end and back-end technologies, committed to delivering high-quality, user friendly solutions. Eager to collaborate with cross-functional teams and contribute to project success while continuously expanding skillset.

## Education

### Bulacan State University - College of Science (2021 - 2025)

Bachelor of Science in Mathematics with Specialization in Computer Science

- 1<sup>st</sup> Year: 1.760, 1.880
- 2<sup>nd</sup> Year: 2.125, 2.103
- 3<sup>rd</sup> Year: 1.725, 1.594

## Experiences

### Highly Succeed Inc. | Backend Developer

- Maintained backend components of web applications using Laravel, REST APIs, Bitbucket and Postman.
- Assisted cross-functional teams including IT Sales and the Unleash Department
- Collaborated with team members in debugging Laravel-based applications.
- Contributed to the Features Library by documenting project workflows and processes under the guidance and the lead web developer, improving documentation clarity for future interns.
- Completed Project Management Training

### Class Secretary | 4<sup>th</sup> Year College

- Nominated by the class to serve as secretary during the final year of college.
- Assisted with purchasing class merchandise, helping with coordination and distribution.
- Checked and recorded class attendance to ensure accurate and updated student records.
- Shared announcements and academic schedules with classmates to maintain clear and timely communication.

## Projects

### AJC Bike Shop Point of Sale Website (Team Project)

- Collaborated with a team to develop core functionalities using HTML5, CSS3, JavaScript, MySQL, and PHP to enable data storage, retrieval, and processing.
- Developed the customer database with user roles, security protocols, and permissions, and the documentation of the AJC Bike Shop: Development of an Automated Data Management System.
- Assisted in designing the UI/UX for an intuitive user experience, improving overall usability.

## Skills

**Programming Languages:** HTML5 • CSS3 • JavaScript • Python • MySQL • Markdown

**Development Frameworks:** React • Bootstrap • PHP • TailwindCSS • Laravel • PySide6 • PyQt • Node.js • Alpine.js • DaisyUI

**Software Development Tools:** Git • Github • Github Actions • Github Pages • Bitbucket • Gitkraken • npm • nodemon • Postman • VS Code • QT Designer • Figma • Canva • Jira • Notion

**Soft Skills:** Team Work • Time Management • Adaptability • Creativity • Continuous Learning • Problem Solving

**Interest:** Cryptocurrency Investing and Trading • Reading Self Help and Fantasy Books

# Elijah Iñigo C. Fabian

## BS Mathematics graduate

✉ elijahinigofabian0704@gmail.com

📞 0936-760-8022

🌐 github.com/Edelweiss-eli

📍 Malolos, Bulacan, 3000



---

A Computer Science major that is equipped with strong problem-solving skills and a solid foundation in programming. Experienced in handling diverse programming projects, with a keen ability to apply analytical thinking to develop efficient solutions.

## Education

---

### Bulacan State University - College of Science (2021 - 2025)

Bachelor of Science in Mathematics with Specialization in Computer Science

#### GWA:

3<sup>rd</sup> year: 1.375

2<sup>nd</sup> year: 1.698, 1.760

1<sup>st</sup> year: 1.54, 1.64

## Experiences

---

### City Municipality of Malolos | Councilor Aide

- Contributed to the office mainly with data evaluation, manning the front desk, and editor of public materials and general graphic designer.
- Designed calling cards and trophy plaques, as well as operating technical aspects in the office.

### Class Treasurer | 4<sup>th</sup> Year College

- Nominated for the fourth year of college, operating the finances of the room and communicating with merchandise collaborations.

## Projects

---

### MediEvaluate: A Medical Article, Generic Medicine Checker App

- Developed a mobile app using Python and Kivy, commissioned for a capstone project to be published.
- Won 3<sup>rd</sup> Place in the Physical Science category of the annual Science Fair.

### ACTIVATED CARBON FROM POLYSTYRENE (C<sub>8</sub>H<sub>8</sub>) AS CARBON DIOXIDE FILTER

- Conducted research on the use of activated carbon derived from polystyrene or styrofoam as a filter for carbon dioxide.

## Skills

---

**Programming Languages:** C/C++ • Java • Python • HTML/CSS • JavaScript • Kotlin • Swift • MATLAB

**Development Frameworks:** Express.js • PySide/PyQT • Kivy

**Software Development Tools:** Git/Github • VS Code • Ubuntu • Unity • GitKraken • Qt Designer

**Soft Skills:** Adaptability • Graphic Design • Problem Solving • Teamwork • Communication Skills