

D1

```
In [1]: import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
```

```
In [3]: df=pd.read_csv(r"C:\Users\user\Downloads\1_fiat500_VehicleSelection_Dataset.csv")
df
```

Out[3]:

	ID	model	engine_power	age_in_days	km	previous_owners	lat	lon
0	1.0	lounge	51.0	882.0	25000.0	1.0	44.907242	8.6115598
1	2.0	pop	51.0	1186.0	32500.0	1.0	45.666359	12.241889
2	3.0	sport	74.0	4658.0	142228.0	1.0	45.503300	11.417
3	4.0	lounge	51.0	2739.0	160000.0	1.0	40.633171	17.634609
4	5.0	pop	73.0	3074.0	106880.0	1.0	41.903221	12.495650
...
1544	NaN	NaN	NaN	NaN	NaN	NaN	NaN	lenç
1545	NaN	NaN	NaN	NaN	NaN	NaN	NaN	conu
1546	NaN	NaN	NaN	NaN	NaN	NaN	NaN	Null valu
1547	NaN	NaN	NaN	NaN	NaN	NaN	NaN	fi
1548	NaN	NaN	NaN	NaN	NaN	NaN	NaN	sear

1549 rows × 11 columns

In [4]: `df.head(10)`

Out[4]:

	ID	model	engine_power	age_in_days	km	previous_owners	lat	lon
0	1.0	lounge	51.0	882.0	25000.0	1.0	44.907242	8.611559868
1	2.0	pop	51.0	1186.0	32500.0	1.0	45.666359	12.24188995
2	3.0	sport	74.0	4658.0	142228.0	1.0	45.503300	11.41784
3	4.0	lounge	51.0	2739.0	160000.0	1.0	40.633171	17.63460922
4	5.0	pop	73.0	3074.0	106880.0	1.0	41.903221	12.49565029
5	6.0	pop	74.0	3623.0	70225.0	1.0	45.000702	7.68227005
6	7.0	lounge	51.0	731.0	11600.0	1.0	44.907242	8.611559868
7	8.0	lounge	51.0	1521.0	49076.0	1.0	41.903221	12.49565029
8	9.0	sport	73.0	4049.0	76000.0	1.0	45.548000	11.54946995
9	10.0	sport	51.0	3653.0	89000.0	1.0	45.438301	10.99170017

In [5]: `df.info()`

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 1549 entries, 0 to 1548
Data columns (total 11 columns):
#   Column              Non-Null Count  Dtype
---  -
0   ID                   1538 non-null   float64
1   model                1538 non-null   object
2   engine_power         1538 non-null   float64
3   age_in_days          1538 non-null   float64
4   km                   1538 non-null   float64
5   previous_owners      1538 non-null   float64
6   lat                  1538 non-null   float64
7   lon                  1549 non-null   object
8   price                1549 non-null   object
9   Unnamed: 9           0 non-null      float64
10  Unnamed: 10          1 non-null      object
dtypes: float64(7), object(4)
memory usage: 133.2+ KB
```

In [6]: `df.describe()`

Out[6]:

	ID	engine_power	age_in_days	km	previous_owners	lat	lon
count	1538.000000	1538.000000	1538.000000	1538.000000	1538.000000	1538.000000	1538.000000
mean	769.500000	51.904421	1650.980494	53396.011704	1.123537	43.541361	10.834262
std	444.126671	3.988023	1289.522278	40046.830723	0.416423	2.133518	2.133518
min	1.000000	51.000000	366.000000	1232.000000	1.000000	36.855839	10.834262
25%	385.250000	51.000000	670.000000	20006.250000	1.000000	41.802990	10.834262
50%	769.500000	51.000000	1035.000000	39031.000000	1.000000	44.394096	10.834262
75%	1153.750000	51.000000	2616.000000	79667.750000	1.000000	45.467960	10.834262
max	1538.000000	77.000000	4658.000000	235000.000000	4.000000	46.795612	10.834262

In [18]: `dft=df.drop(["Unnamed: 9","Unnamed: 10"],axis=1)`

In [41]: `dff=dft.dropna()`

In [42]: `dff.isnull().sum()`

Out[42]:


ID	0
model	0
engine_power	0
age_in_days	0
km	0
previous_owners	0
lat	0
lon	0
price	0
dtype: int64	

In [43]: `dff.columns`

Out[43]: Index(['ID', 'model', 'engine_power', 'age_in_days', 'km', 'previous_owners', 'lat', 'lon', 'price'], dtype='object')

```
In [44]: sns.pairplot(dff)
```

```
Out[44]: <seaborn.axisgrid.PairGrid at 0x1488753f690>
```

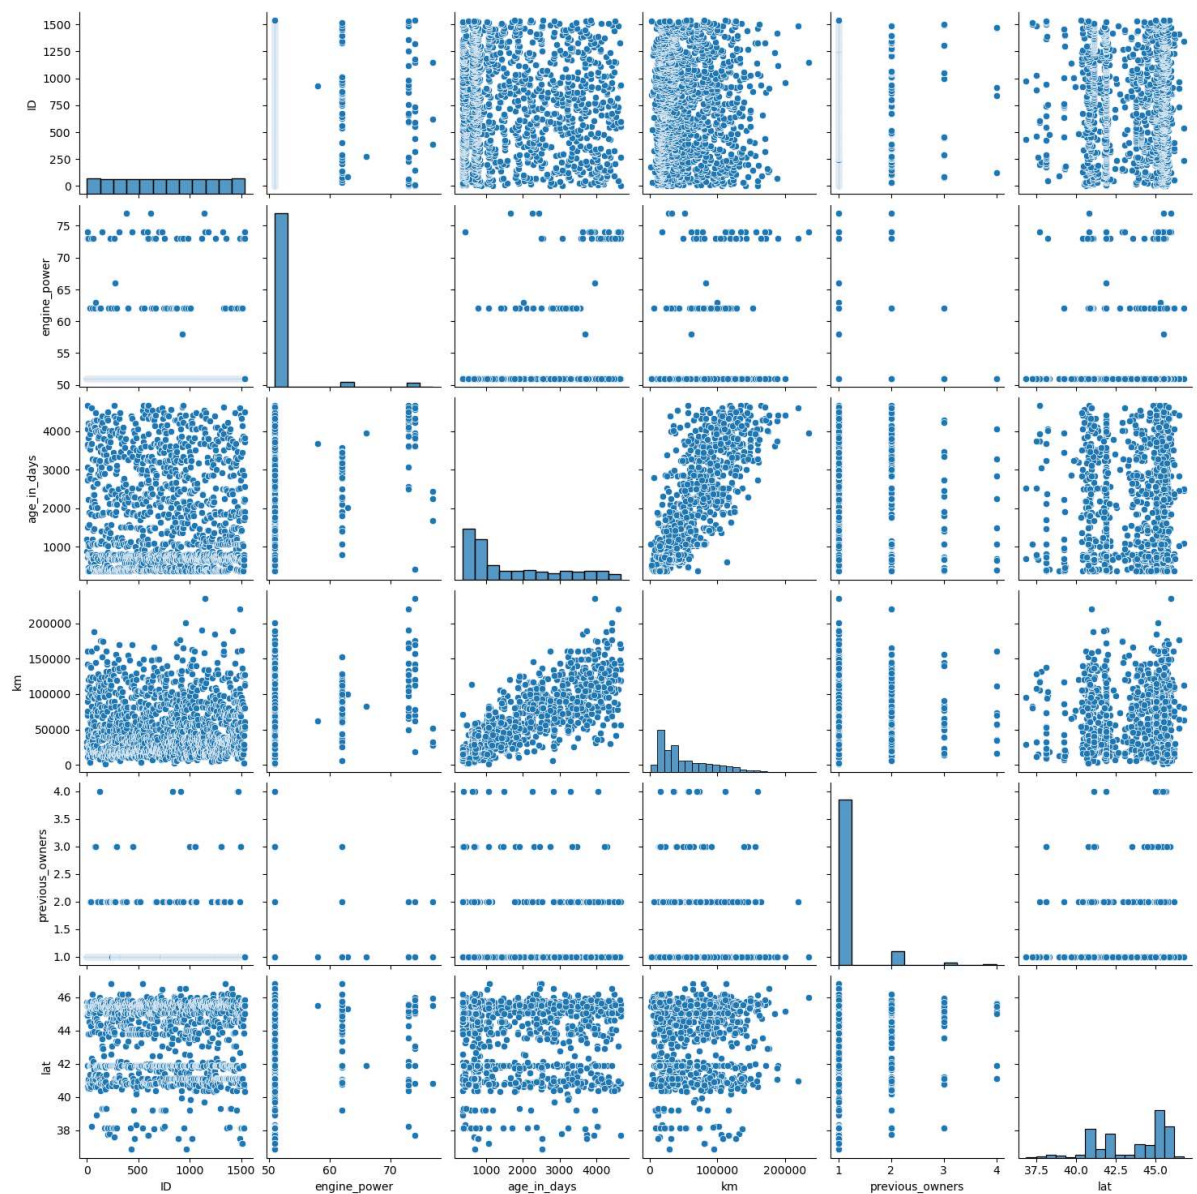

```
In [45]: sns.distplot(dff["km"])
```

C:\Users\user\AppData\Local\Temp\ipykernel_3516\596799067.py:1: UserWarning:

`distplot` is a deprecated function and will be removed in seaborn v0.14.0.


Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

For a guide to updating your code to use the new functions, please see

<https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751> (<https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751>)

```
sns.distplot(dff["km"])
```

Out[45]: <Axes: xlabel='km', ylabel='Density'>

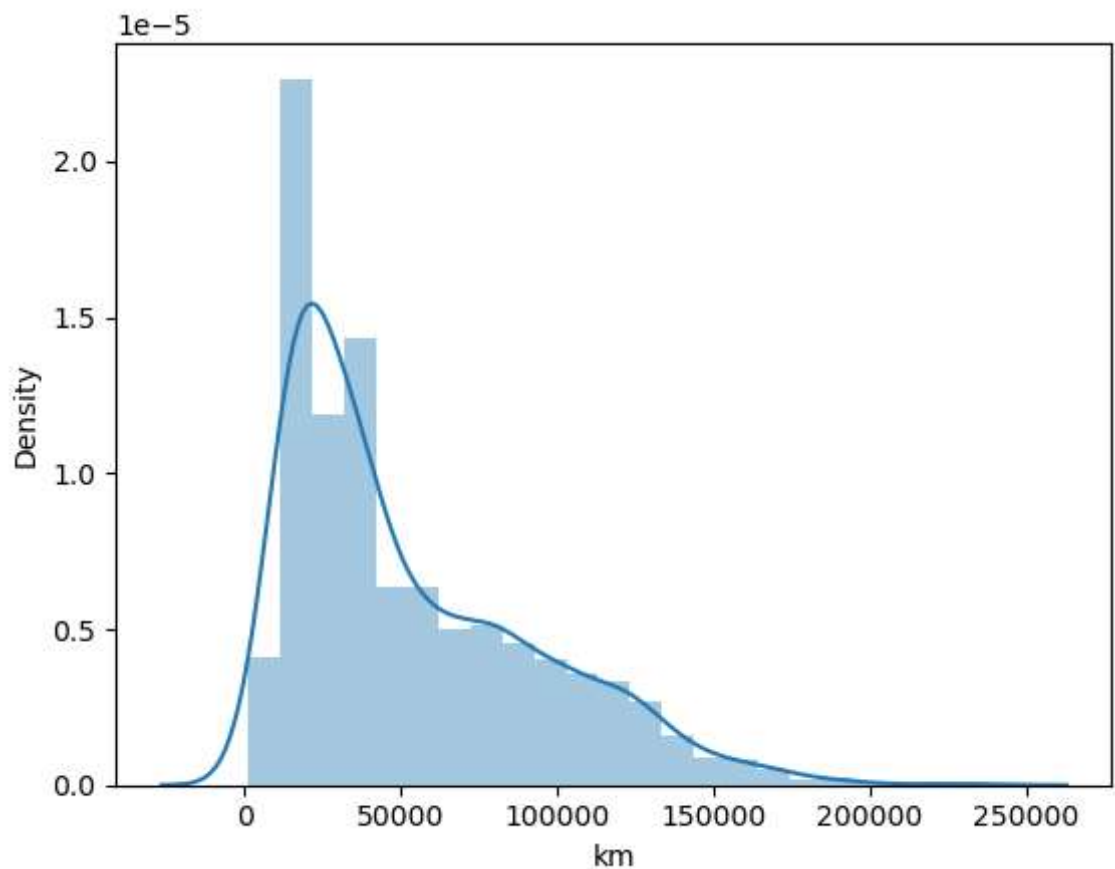


```
In [46]: df1=dfff[['ID', 'model', 'engine_power', 'age_in_days', 'km', 'previous_owners',  
                  'lat', 'lon', 'price']]
```

```
In [47]: sns.heatmap(df1.corr())
```

C:\Users\user\AppData\Local\Temp\ipykernel_3516\781785195.py:1: FutureWarning: The default value of numeric_only in DataFrame.corr is deprecated. In a future version, it will default to False. Select only valid columns or specify the value of numeric_only to silence this warning.

```
sns.heatmap(df1.corr())
```

```
Out[47]: <Axes: >
```

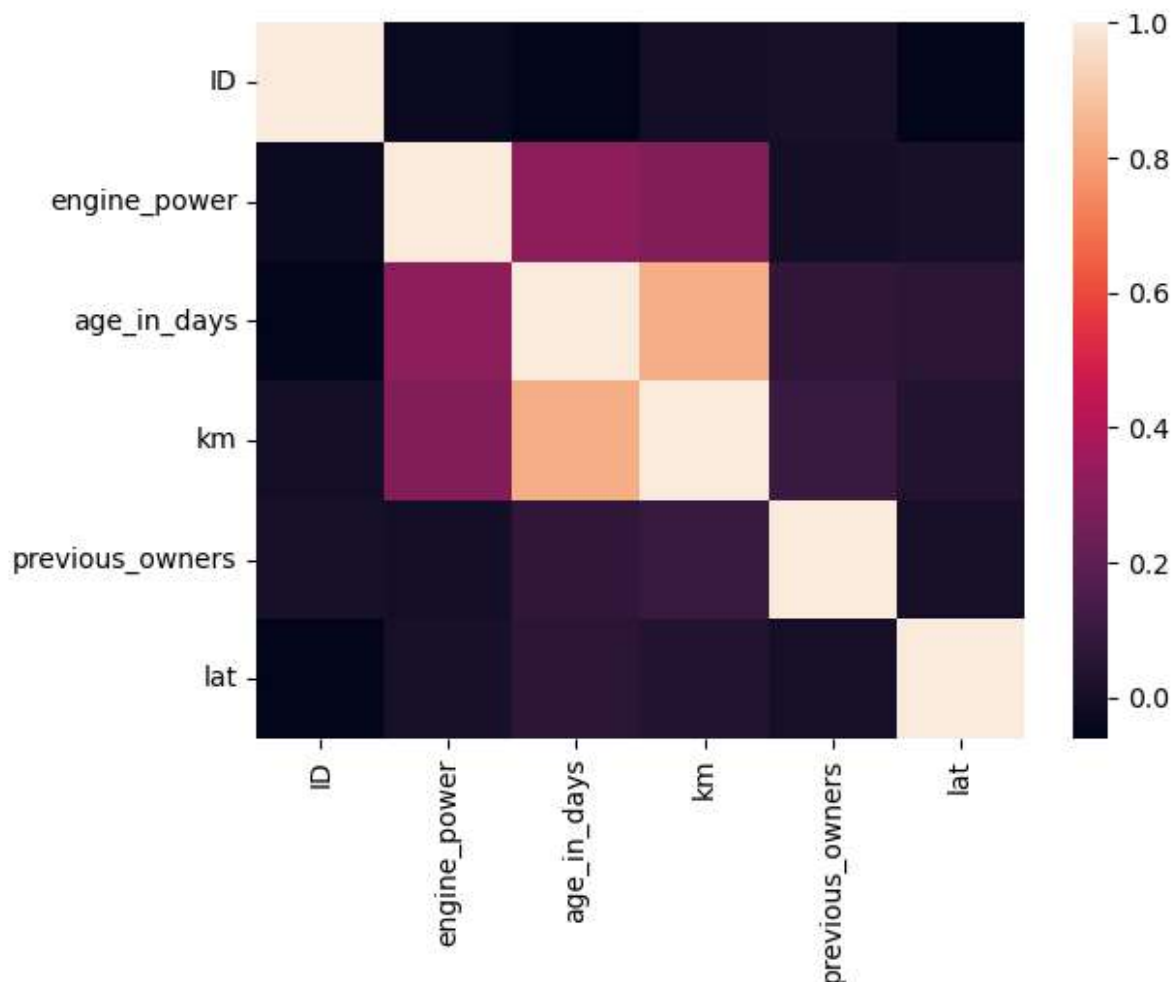

```
In [48]: x=df1[['ID', 'engine_power', 'age_in_days', 'previous_owners',
               'lat']]
         y=df1['km']
```

```
In [49]: from sklearn.model_selection import train_test_split
         x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.3)
```

```
In [50]: from sklearn.linear_model import LinearRegression
         lr=LinearRegression()
         lr.fit(x_train,y_train)
```

```
Out[50]: ▾ LinearRegression
         LinearRegression()
```

```
In [51]: print(lr.intercept_)
```

27056.126671836108


```
In [52]: coeff = pd.DataFrame(lr.coef_,x.columns,columns=['Co-efficient'])  
coeff
```

Out[52]:

	Co-efficient
ID	3.175674
engine_power	32.290076
age_in_days	25.565665
previous_owners	3663.092059
lat	-547.271452

```
In [53]: prediction=lr.predict(x_test)  
plt.scatter(y_test,prediction)
```

Out[53]: <matplotlib.collections.PathCollection at 0x148875e27d0>

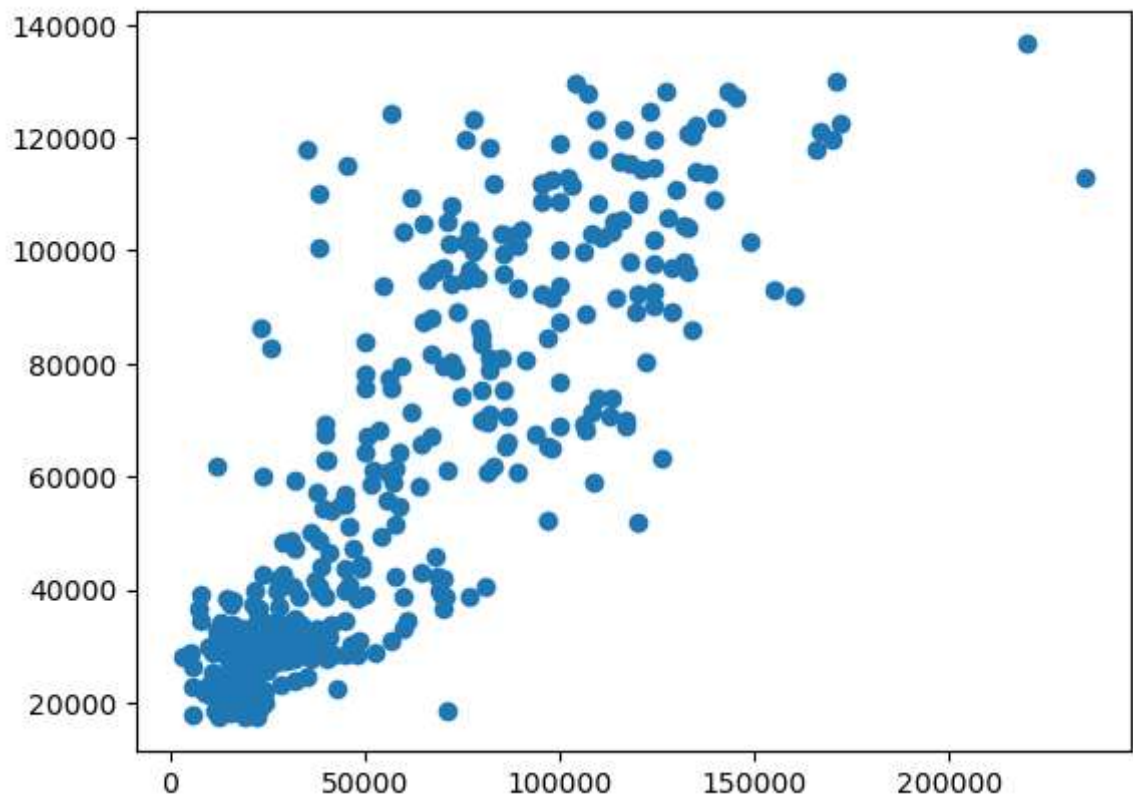

```
In [54]: print(lr.score(x_test,y_test))
```

0.7195587585704751

In []: