


Foresight Lab | Selective calibration under changing dynamics


1,080 method episode runs | 18 paired layouts per condition | 3 frozen training seeds | descriptive results

Frozen learned Always calibrate Gated calibrate Local physics


A 16-step open-loop prediction

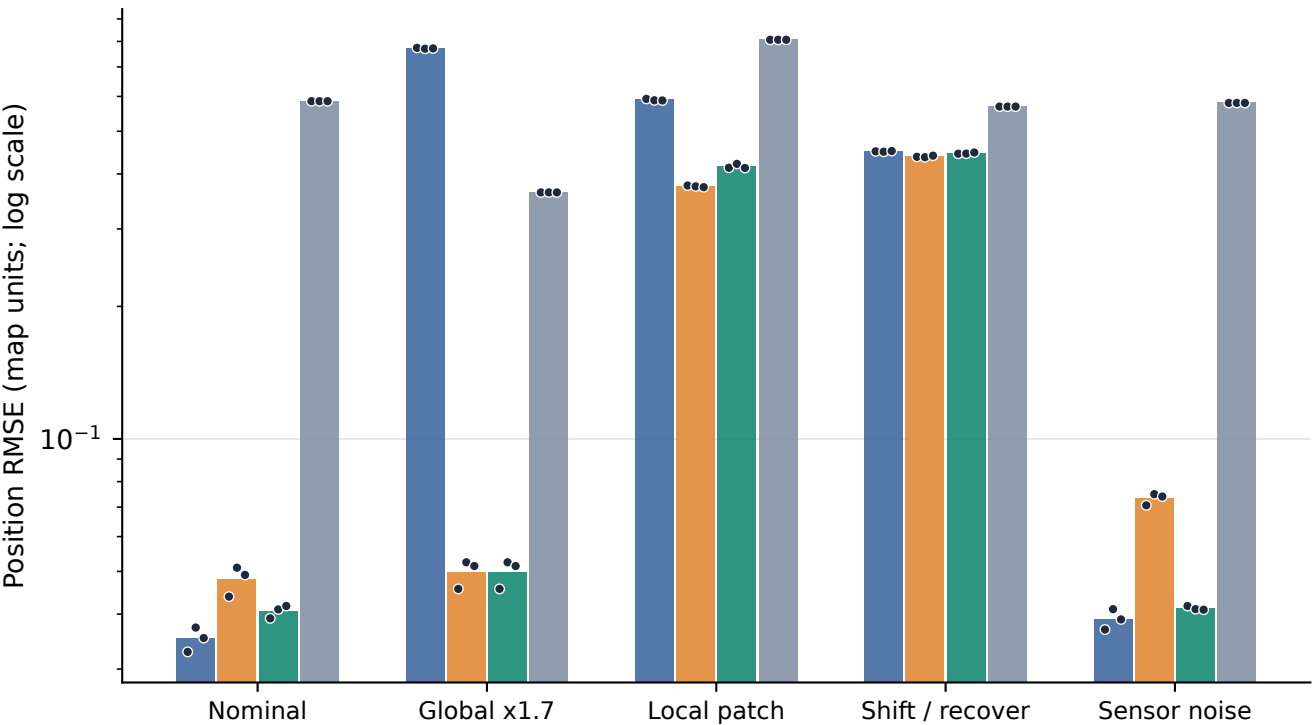

B Navigation success

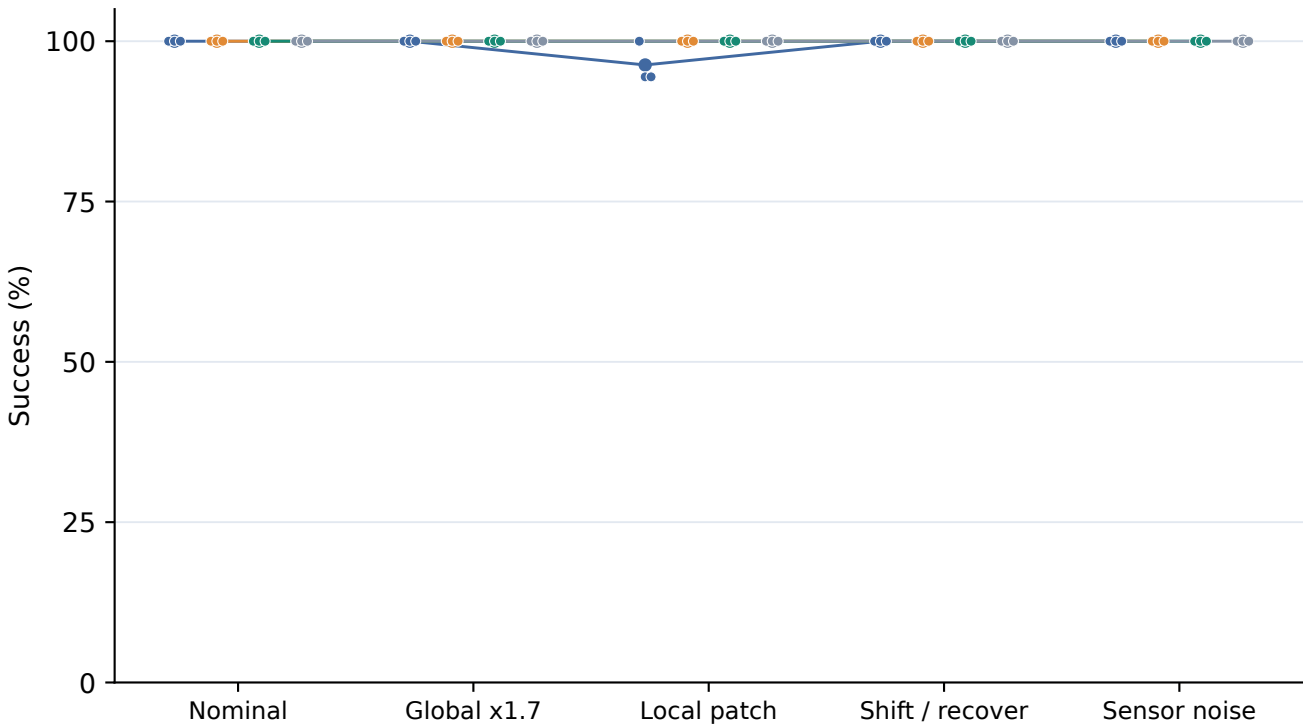

C Gate use (episode and step denominators)

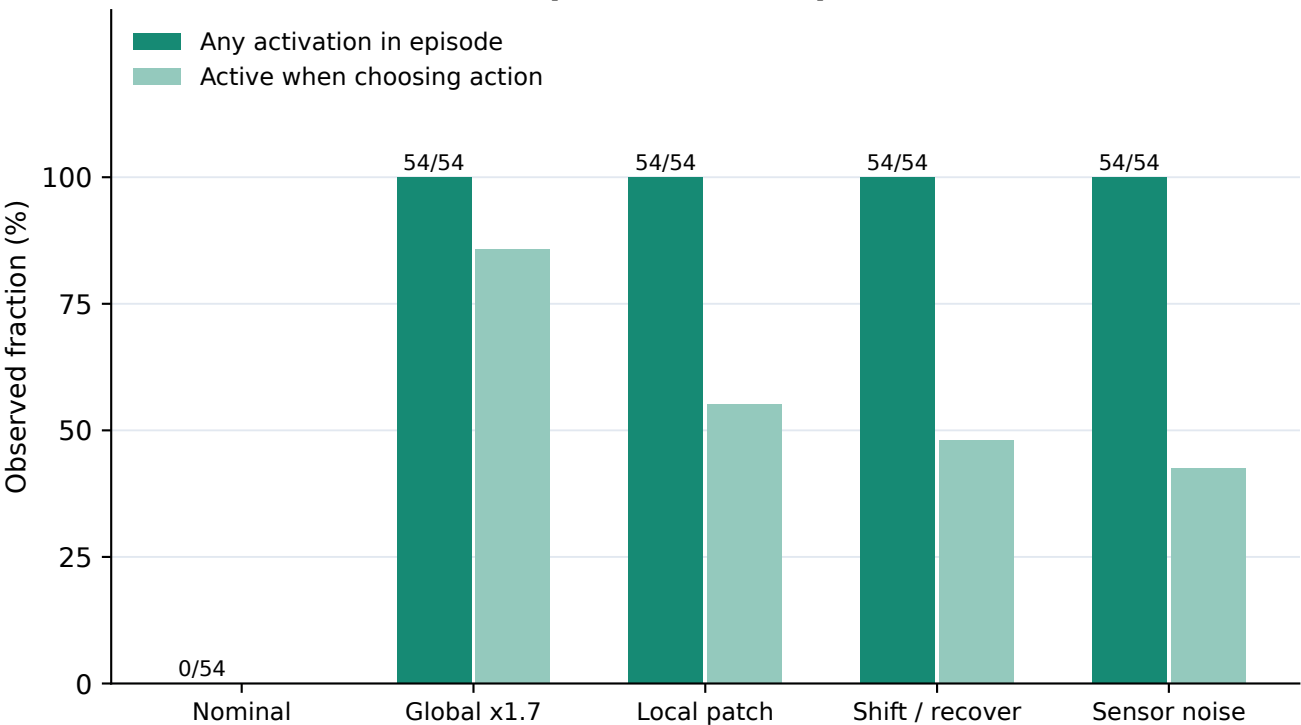

D Observed change response

Global x1.7 from start: 54/54 eligible detected

Exposed 54/54; pre-active 0; median delay 6 observations

Full-window misses 0; censored 0

Within-episode shift (step 8): 54/54 eligible detected

Exposed 54/54; pre-active 0; median delay 4 observations

Full-window misses 0; censored 0

Return to nominal (step 24): 54/54 eligible deactivated

Exposed 54/54; already inactive 0; median 7 observations

No observed deactivation before episode end: 0

Delays condition on observed endpoints. Terminal censoring is retained. P95 controller timings and every seed's counts are in analysis.json.

Dots show individual training seeds, not confidence intervals. Physics panels repeat the same deterministic method; prediction windows overlap.

MPC: H=10, 4,500 member-transitions per decision; calibration work counted separately. Gate activation under sensor noise is not a true dynamics event.