Observation semantics: development effects (30 reused starts)

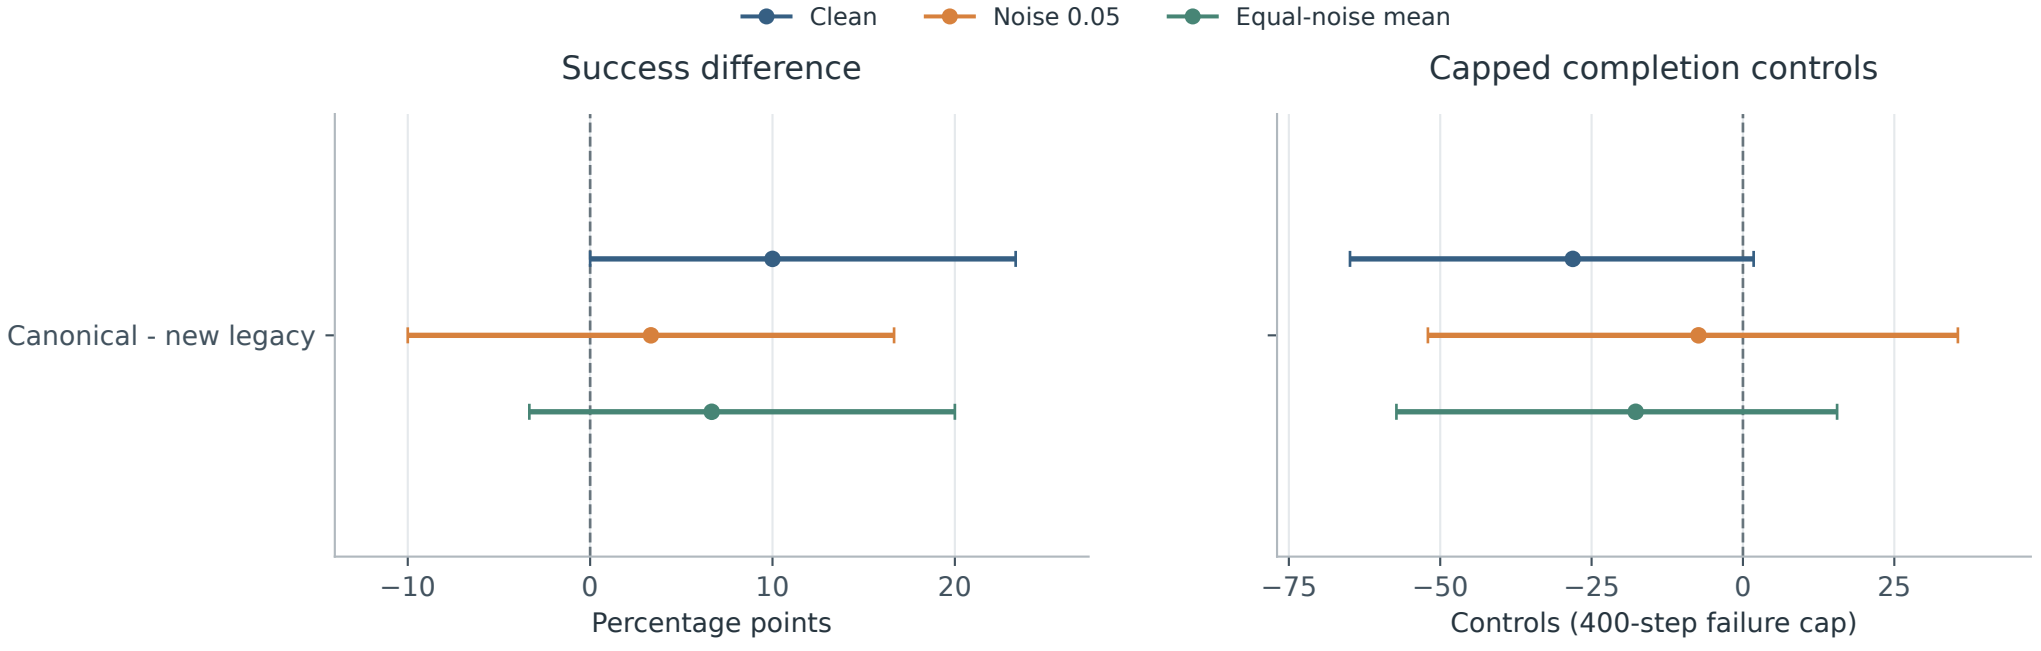

DEVELOPMENT ONLY: 30 reused demonstration starts; 120 executions. Matched newly trained final BC checkpoints; no recovery.
These starts were available during development and are not additional independent confirmation samples.
Pointwise 95% paired-start bootstrap intervals, 20,000 draws; noise conditions averaged within start for joint effects.