# Observation semantics: development comparison (30 reused starts)

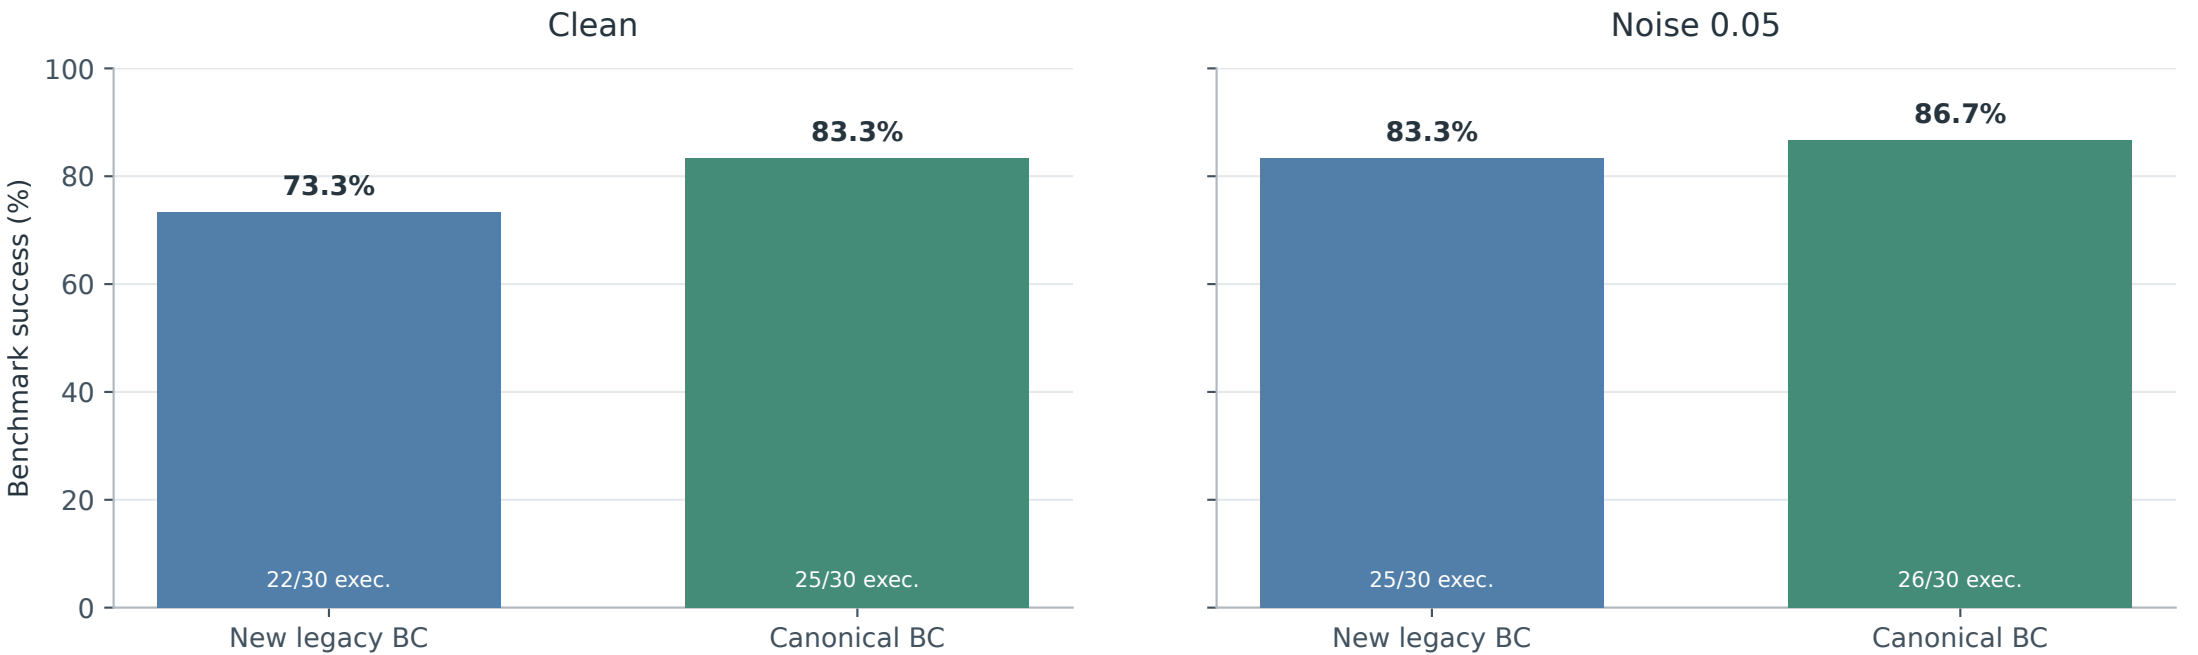


DEVELOPMENT ONLY: 30 reused demonstration starts; 120 executions. Matched newly trained final BC checkpoints; no recovery.
These starts were available during development and are not additional independent confirmation samples.