

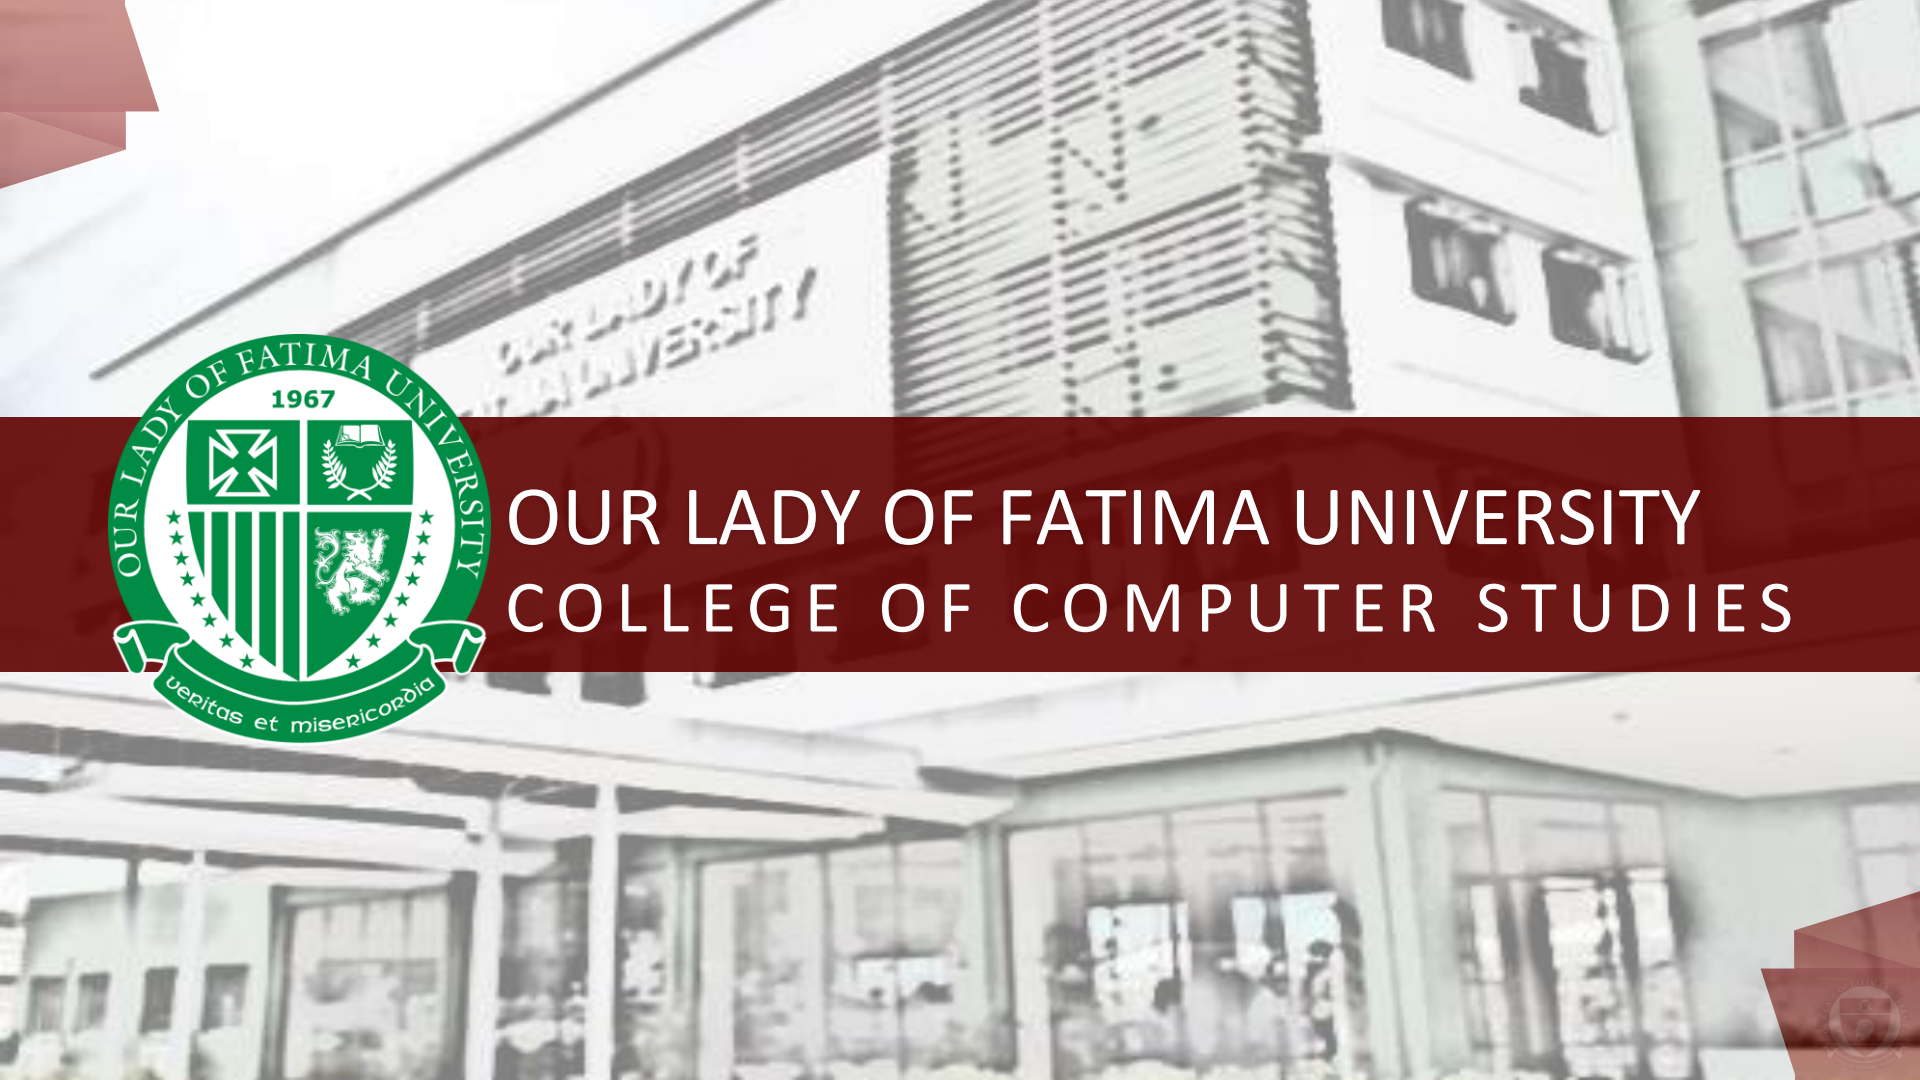


OUR LADY OF FATIMA UNIVERSITY
COLLEGE OF COMPUTER STUDIES

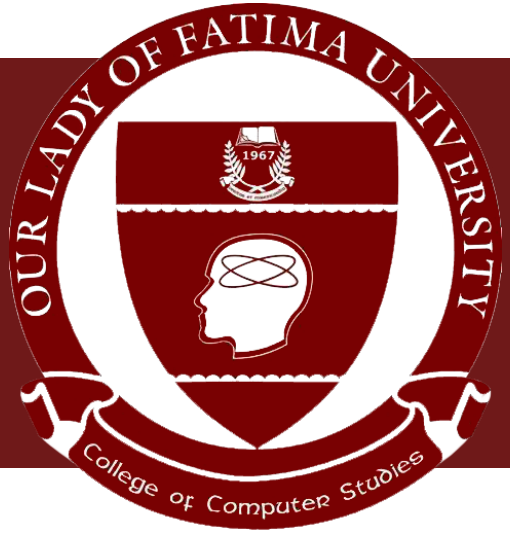


OOPR211
OBJECT-ORIENTED
PROGRAMMING I

PRELIMS ROADMAP

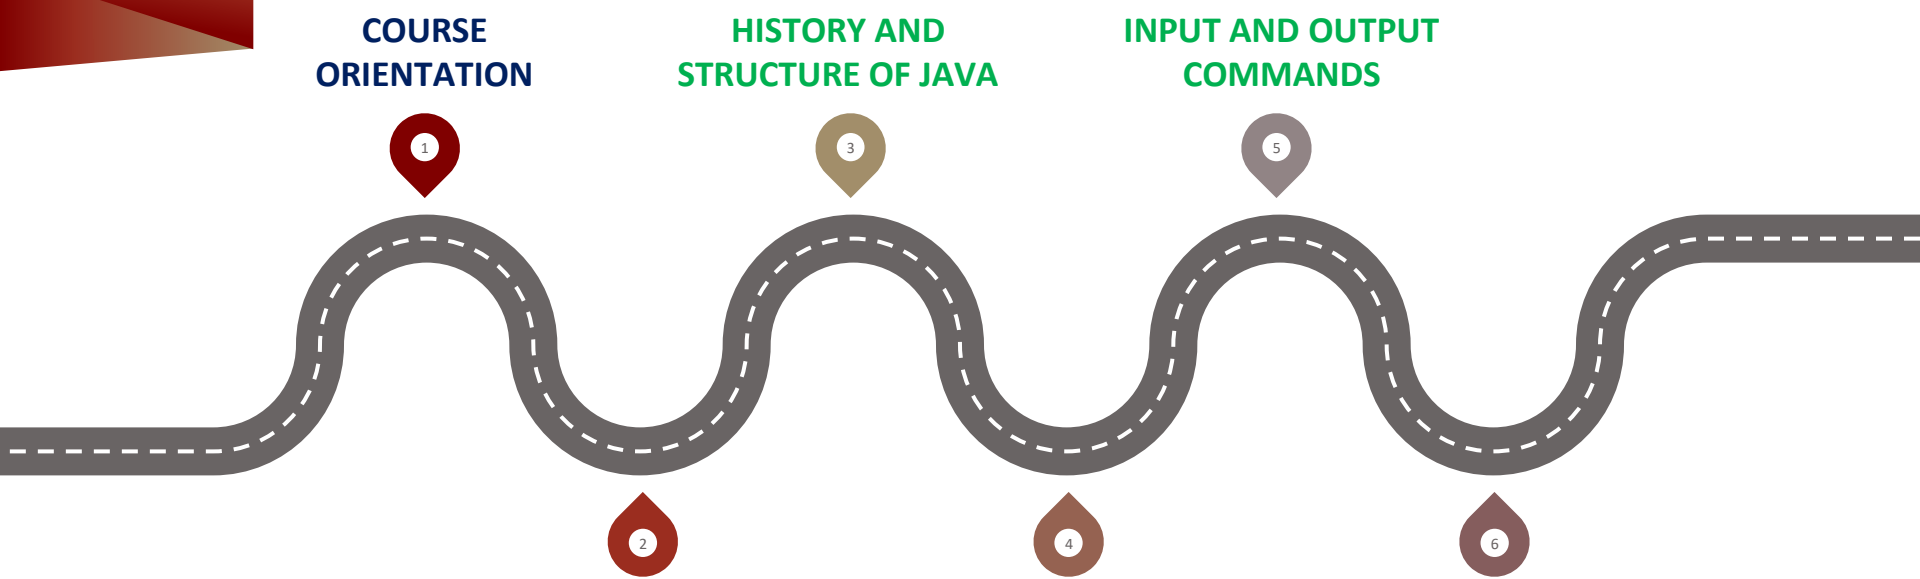

PRELIMS ROADMAP

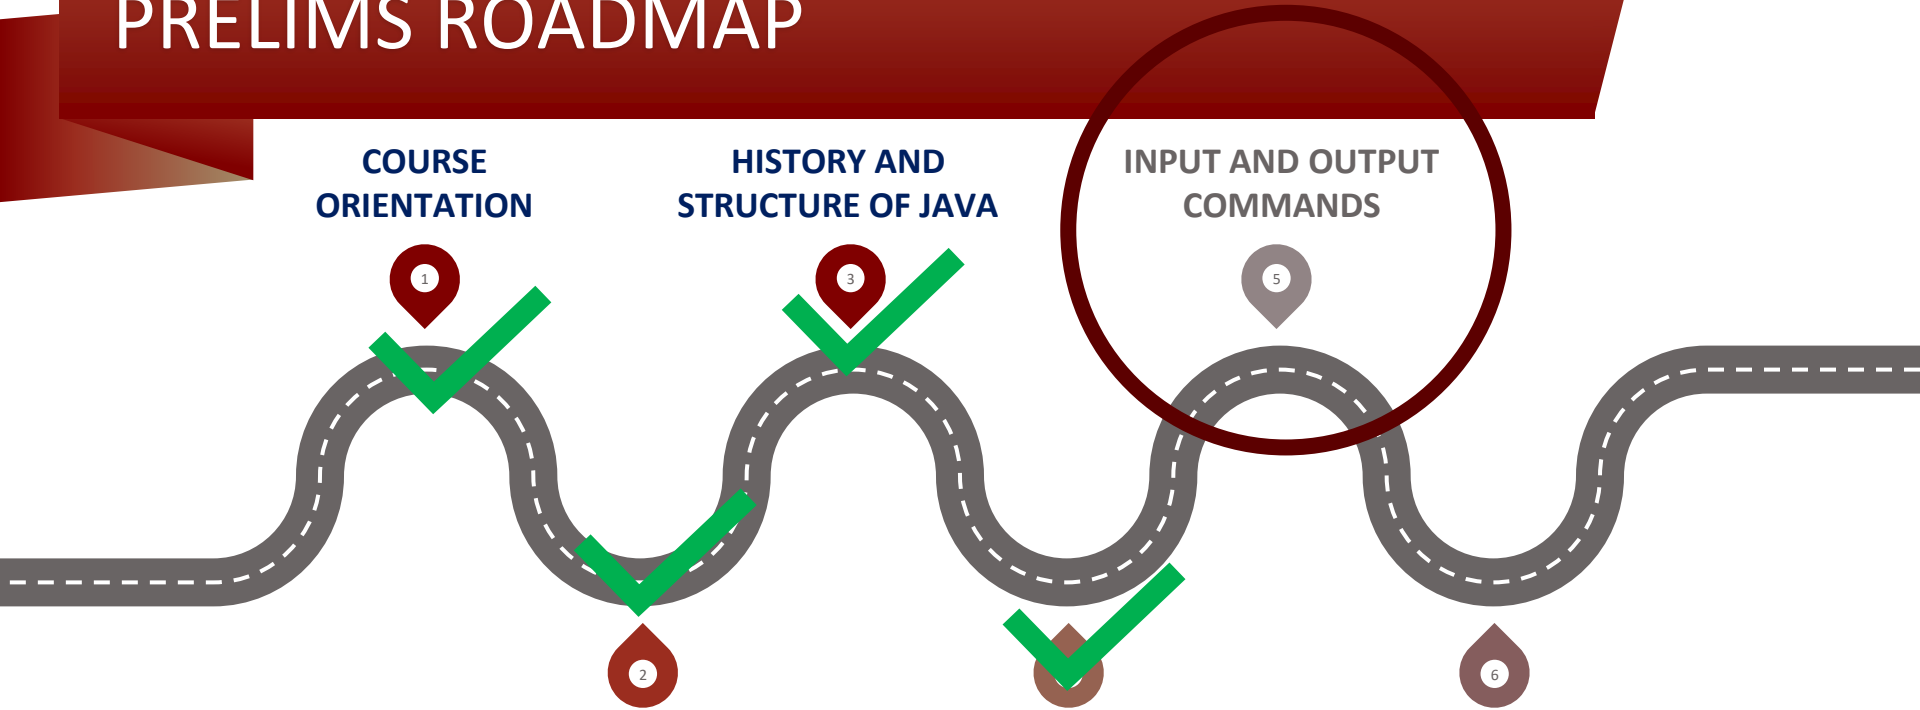

Module 4: INPUT & OUTPUT COMMANDS

Module Objectives:

1

Evaluate input & output commands of the language.

2

Utilize the use of Input and Output commands in Java Programming

Topics:

- Accepting User Inputs using BufferedReader Class
- Using the Scanner Class for Keyboard Input

1

Accepting User Inputs using BufferedReader Class

Using BufferedReader Class

```
import java.io.*;
public class scan
{
public static void main(String args [])throws IOException
        {
        BufferedReader myin = new BufferedReader(new InputStreamReader(System.in));

        String number1,number2;
        int num1,num2,sum;

        System.out.print("Enter your first Number: ");
        number1 = myin.readLine();

        System.out.print("Enter your second Number: ");
        number2 = myin.readLine();

        num1 = Integer.parseInt(number1);
        num2 = Integer.parseInt(number2);
        sum = num1 + num2;

        System.out.println("Sum = " +sum);

        }
}
```

```
import java.io.*;
public class scan
{
public static void main(String args [])throws IOException
        {
        BufferedR                                    eader(System.in));

        String nu
        int num1,
```

import java.io.*;

import

Call or indicates that the program will use java package.

java.io.*

All classes/items in “io” package of java package.

```
import java.io.*;
public class scan
{
public static void main(String args []) throws IOException
        {
        BufferedReader myin = new BufferedReader(new InputStreamReader(System.in));

        String number1,number2;
        int num1,num2,sum;
```

throws

A throw statement is executed to indicate an exception has occurred.

IOException

An exception that is use to handle problem cause by BufferedReader class

```
import java.io.*;
public class scan
{
public static void main(String args [])throws IOException
        {
        BufferedReader myin = new BufferedReader(new InputStreamReader(System.in));
        String number1,number2;
        int num1,num2,sum;
```

BufferedReader

a Java Class used to read text from a character-input stream

myin

Definded variable name for the INPUT.

```
import java.io.*;
public class scan
{
public static void main(String args [])throws IOException
        {
        BufferedReader myin = new BufferedReader(new InputStreamReader(System.in));
        String number1,number2;
        int num1,num2,sum;
```

InputStreamReader

a bridge from byte streams to character streams

System.in

an InputStream which is typically connected to keyboard input of console programs.

```
import java.io.*;
public class scan
{
public static void main(String args [])throws IOException
        {
        BufferedReader myin = new BufferedReader(new InputStreamReader(System.in));

        String number1,number2;
        int num1,num2,sum;

        System.out.prin
        number1 = myi

        System.out.prin
        number2 = myi

         num1 = Integer.parseInt(number1);
         num2 = Integer.parseInt(number2);
        sum = num1 + num2;

        System.out.println("Sum = " +sum);

        }
}
```

Integer.parseInt()

a static method of class Integer, converts its String argument to an integer type. Class Integer is defined in package java.lang

2 Using the Scanner Class for Keyboard Input

Using SCANNER Class

```
import java.util.Scanner;
public class scan
{
        public static void main (String args [])
        {

        String name;
        int age;

        Scanner my scan = new Scanner(System.in);

        System.out.print("Name: ");
        name = myscan.nextLine();

        System.out.print("Age: ");
        age = myscan.nextInt();

        System.out.print("Your name is " + name + " and you are " + age + " years old.\n");
        }
}
```

```
import java.util.Scanner;
public class scan
{
        public static void main (String args [])
        {
        System.out.print("Name: ");
        name = myscan.nextLine();

        System.out.print("Age: ");
        age = myscan.nextInt();

        System.out.print("Your name is " + name + " and you are " + age + " years old.\n");
        }
}
```

java.util.Scanner;

Calling Scanner Classs in “util” package of java package.

```
import java.util.Scanner;
public class scan
{
        public static void main (String args [])
        {

        String name;
        int age;

        Scanner my scan = new Scanner(System.in);

        System.out.print("Name: ");
        name = myscan.nextLine();

        System.out.print("Age: ");
        age = myscan.nextInt();

        System.out.print("Your name is " + name + " and you are " + age + " years old.\n");
        }
```

Scanner Class

A class in java.util, which allows the user to read values of various types.

```
import java.util.Scanner;
public class scan
{
        public static void main (String args [])
        {

        String name;
        int age;

        Scanner my scan = ne

        System.out.print("Name: ");
        name = myscan.nextLine();

        System.out.print("Age: ");
        age = myscan.nextInt();

        System.out.print("Yo                                    n");
        }
}
```

nextLine()

Retrieves the next line of data and returns is as string.

nextInt()

Retrieves input as int.

Methods use under Scanner Class

Method	Description
nextDouble()	Retrieves input as double.
nextInt()	Retrieves input as int.
nextLine()	Retrieves the next line of data and returns is as string.
next ()	Retrieves the next complete token as string.

Output

COMMANDS



```
import java.io.*;
public class scan
{
public static void main(Strin
        {
        BufferedReader myin
        String number1,numb
        int num1,num2,sum;

        System.out.print("Enter your first Number: ");
        number1 = myin.readLine();

        System.out.print("Enter your second Number: ");
        number2 = myin.readLine();

        num1 = Integer.parseInt(number1);
        num2 = Integer.parseInt(number2);
        sum = num1 + num2;

        System.out.println("Sum = " +sum);

        }
}
```

System.out

A PrintStream. System.out normally outputs the data you write to it to the console

```
import java.io.*;
public class scan
{
public static void main(Strin
        {
        BufferedReader myin
        String number1,number2;
        int num1,num2,sum;

        System.out.printl"Enter your first Number: ");
        number1 = myin.readLine();

        System.out.printl"Enter your second Number: ");
        number2 = myin.readLine();

        num1 = Integer.parseInt(number1);
        num2 = Integer.parseInt(number2);
        sum = num1 + num2;

        System.out.println("Sum = " +sum);

        }
}
```

print() or println()

QUESTIONS?

Thank you!


Credits

Special thanks to all the people who made and released these awesome resources for free:

- Presentation template by SlidesCarnival
- Photographs by Unsplash

Additional References:

- https://www.edureka.co/blog/what-is-java/
- http://ecomputernotes.com/java/what-is-java-language/types-of-java-programs

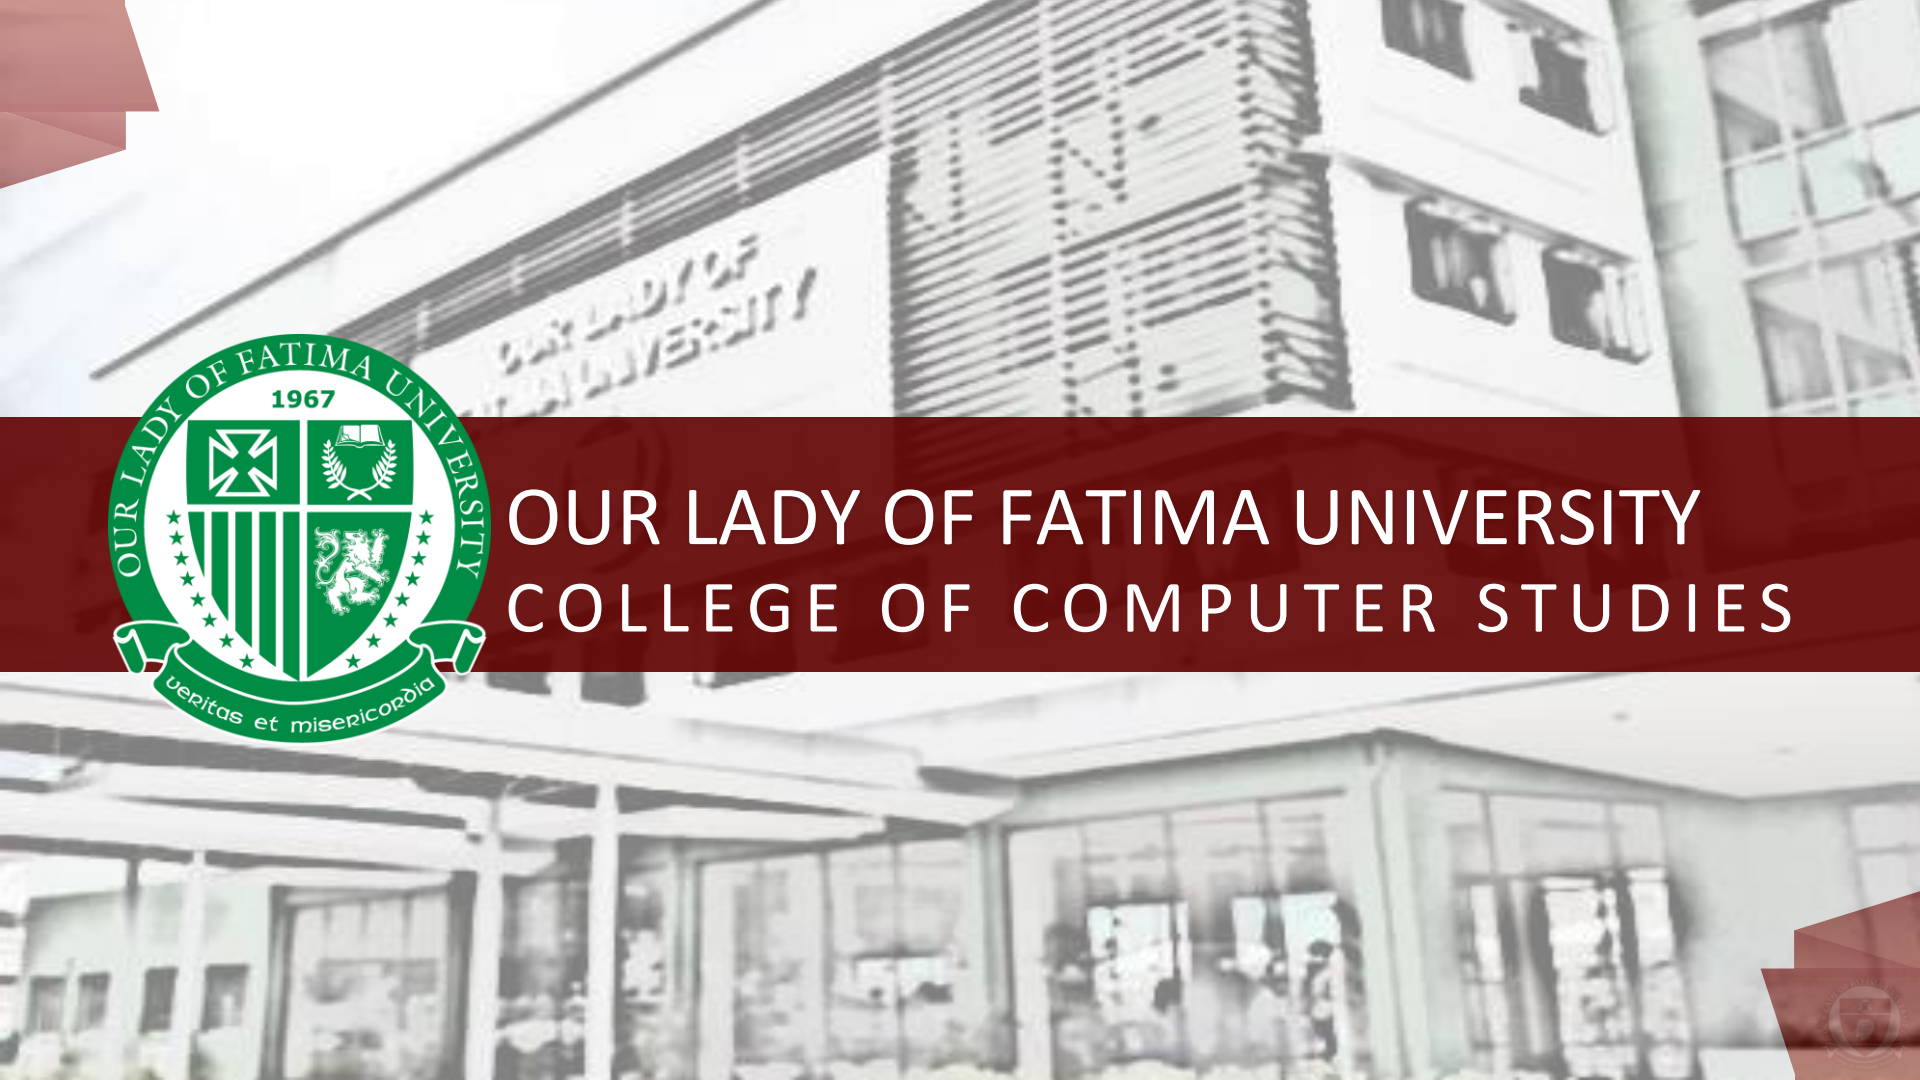

OUR LADY OF FATIMA UNIVERSITY
COLLEGE OF COMPUTER STUDIES