



Code structures

Basic HTML File

```
<!DOCTYPE html>
<html>
<head>
  <title>the trial</title>
</head>
<body>
  <h1> hello world </h1>
  <p> the world is the world </p>
</body>
</html>
```

HTML File with attributes

```
<!DOCTYPE html>
<html Lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>the trial</title>
</head>
<body>
  <h1> hello world </h1>
  <p> the world is the world </p>
</body>
</html>
```

Headings (<h#>)

```
</head>
<body>
  <h1> hello world </h1>
  <h2> hello world </h2>
  <h3> hello world </h3>
  <h4> hello world </h4>
  <h5> hello world </h5>
  <h6> hello world </h6>
</body>
</html>
```

Paragraph (<p>)

```
</head>
<body>
  <p> hello world </p>
</body>
</html>
```

Bold text ()

```
</head>
<body>
  <p> hello world is <strong> always </strong> important </p>
</body>
</html>
```

Italic text ()

```
</head>
<body>
  <p> hello world is always important that's
    why we <em> love </em> it</p>
</body>
</html>
```

Underlined text (<u>)

```
</head>
<body>
  <p> hello world is <u> is the most used</u> phrase</p>
</body>
</html>
```

Superscript text (<sup>)

```
</head>
<body>
  <p> 1<sup>st</sup> hello world 2<sup>nd</sup> omsim </p>
</body>
</html>
```

Subscript text (<sub>)

```
</head>
<body>
  <p> water is H<sub>2</sub>O </p>
</body>
</html>
```

Strike text ()

```
</head>
<body>
  <p> hello world is <del>ugly</del> pretty </p>
</body>
</html>
```

Line break (
)

```
</head>
<body>
  <p> Life is life <br> omsim yesssss</p>
</body>
</html>
```

Mark text (<mark>)

```
</head>
<body>
  <p> hello world is on <mark> Sunday </mark> </p>
</body>
</html>
```

Horizontal rule (<hr>)

```
</head>
<body>
  <p> Life is life </p>
  <hr>
  <p> hello world </p>
</body>
</html>
```

Quote text (<q>)

```
</head>
<body>
  <p> <q>the world spins no matter what</q> -Reeyanatotle </p>
</body>
</html>
```

Blockquote text (<blockquote>)

```
</head>
<body>
  <blockquote>
    <p> "gravity in the bus is 0.000001 but when you're out
      of the bus it becomes normal again because the life
      is the life of the life of it" </p>
  </blockquote>
</body>
</html>
```

Computer code (<code>)

```
</head>
<body>
  <code> Hello, World! </code>
</body>
</html>
```

Cite TAG (<cite>)

```
</head>
<body>
  <p> The book <cite>Reeyana's laws and theories</cite> is wow</p>
</body>
</html>
```

Preformatted text (<pre>)

```
</head>
<body>
  <pre> hellow word
      hellow would
      helo wolrd
  </pre>
</body>
</html>
```

Cite ATTRIBUTE (<q cite="">)

```
</head>
<body>
  <p> The chesire cat once said,
    <q cite="https://www.goodreads.com/quotes/tag/alice-in-wonderland"></q></p>
</body>
</html>
```

Footer text (<footer>)

```
</head>
<body>
  <p> Life is life omsim yesssss</p>
  <footer> -Reeyanatotle </footer>
</body>
</html>
```

Unordered lists ()

```
</head>
<body>
  <ul>
    <li> wow </li>
    <li> yay </li>
    <li> shish </li>
  </ul>
</body>
</html>
```

Nested Lists (or)

```
</head>
<body>
  <ul>
    <li> this is for ul </li>
    <li> nested has ul and ol
      <ol>
        <li> like this </li>
        <li> yeahhh </li>
      </ol>
    </li>
    <li> seeeeeee </li>
  </ul>
</body>
</html>
```

Ordered lists ()

```
</head>
<body>
  <ol>
    <li> ummm </li>
    <li> errr </li>
    <li> hmmm </li>
  </ol>
</body>
</html>
```

Basic table (<table>)

```
</head>
<body>
  <table>
    <tr>
      <td> 1, 2 </td>
      <td> 3, 4 </td>
    </tr>
    <tr>
      <td> 5, 6 </td>
      <td> 7, 8 </td>
    </tr>
  </table>
</body>
</html>
```

Definition lists ()

```
</head>
<body>
  <dl>
    <dt> fruite </dt>
    <dd> you eat it </dd>
    <dt> drink </dt>
    <dd> you use cup </dd>
    <dt> reeyana </dt>
    <dd> pretty sya </dd>
  </dl>
</body>
</html>
```

Table headers (<th>)

```
</head>
<body>
  <table>
    <tr>
      <th> odd </th>
      <th> even </th>
    </tr>
    <tr>
      <td> 1, 3 </td>
      <td> 2, 4 </td>
    </tr>
    <tr>
      <td> 5, 7 </td>
      <td> 6, 8 </td>
    </tr>
  </table>
</body>
</html>
```

Caption tag (<caption>)

```
</head>
<body>
  <table>
    <caption> Healthy foods </caption>
    <tr>
      <th rowspan="2"> food </th>
      <th colspan="2"> color </th>
    </tr>
    <tr>
      <th> red </th>
      <th> green </th>
    </tr>
    <tr>
      <td> veggie </td>
      <td> bell pepper </td>
      <td> brocolli </td>
    </tr>
    <tr>
      <td> fruit </td>
      <td> green apple </td>
      <td> melon </td>
    </tr>
  </table>
</body>
</html>
```

Merging cells (<th rowspan=""> <th colspan="">)

```
</head>
<body>
  <table>
    <tr>
      <th rowspan="2"> food </th>
      <th colspan="2"> color </th>
    </tr>
    <tr>
      <th> red </th>
      <th> green </th>
    </tr>
    <tr>
      <td> veggie </td>
      <td> bell pepper </td>
      <td> brocolli </td>
    </tr>
    <tr>
      <td> fruit </td>
      <td> green apple </td>
      <td> melon </td>
    </tr>
  </table>
</body>
</html>
```

Table with attributes

```
</head>
<body>
  <table border="1" cellspacing="10" cellpadding="5" width="80%"
    height="200" align="center" bgcolor="blue">
    <caption> Healthy foods </caption>
    <tr>
      <th rowspan="2"> food </th>
      <th colspan="2"> color </th>
    </tr>
    <tr>
      <th> red </th>
      <th> green </th>
    </tr>
    <tr>
      <td> veggie </td>
      <td> bell pepper </td>
      <td> brocolli </td>
    </tr>
    <tr>
      <td> fruit </td>
      <td> green apple </td>
      <td> melon </td>
    </tr>
  </table>
</body>
</html>
```

Basic image calling () with alt attribute (alt="")

```
</head>
<body>
  
</body>
</html>
```

Image border attribute (border="")

```
</head>
<body>
  
</body>
</html>
```

Image hspace (hspace="") and vspace (vspace="") attribute

```
</head>
<body>
  
</body>
</html>
```

Image align attribute (border="")

```
</head>
<body>
  
</body>
</html>
```

Basic hyperlink

```
</head>
<body>
  <a href="https://reeyanashishcutie.com">Press this to visit</a>
</body>
</html>
```

Basic hyperlink with target attribute (target="_blank")

```
</head>
<body>
  <a href="https://reeyanashishcutie.com" target="_blank">Press this to visit</a>
</body>
</html>
```

Basic hyperlink with download attribute (download="")

```
</head>
<body>
  <a href="https://reeyanashishcutie.pdf" download="its_a_file.pdf">
    download the file</a>
</body>
</html>
```

Basic hyperlink with rel attribute (rel="")

```
</head>
<body>
  <a href="https://reeyanashishcutie.css" rel="stylesheet">link the sheet</a>
</body>
</html>
```

Basic hyperlink with title attribute (title="")

```
</head>
<body>
  <a href="https://reeyanashishcutie.css" title="wat a title">click on it</a>
</body>
</html>
```

Basic video calling

```
</head>
<body>
  <video src="ririvid.mp4" controls autoplay>
    Your browser does not support the video tag
  </video>
</body>
</html>
```

Basic audio calling

```
</head>
<body>
  <audio src="ririaudio.mp3" controls autoplay muted>
    Your browser does not support the audio tag
  </audio>
</body>
</html>
```

Cross-browser compatibility for video

```
</head>
<body>
  <video controls>
    <source src="ririvid.mp4" type="video/mp4">
    <source src="ririvid.webm" type="video/webm">
    <p>your browser donut support this vid tag hayyy</p>
  </video>
</body>
</html>
```

Cross-browser compatibility for audio

```
</head>
<body>
  <audio controls>
    <source src="ririaudio.mp3" type="audio/mp3">
    <source src="ririaudio.ogg" type="audio/ogg">
    <p>your browser donut support this audio tag hayyy</p>
  </audio>
</body>
</html>
```

Responsive videos

```
</head>
<body>
  <video poster="cutiefacenireeyana.jpg" controls>
    <source src="ririvid.mp4" type="video/mp4" media="(max-width: 600px)">
    <source src="ririvid.webm" type="video/webm">
  </video>
</body>
</html>
```

More Video and Audio Attributes

- > **src** – for specifying the URL of the media file,
- > **controls** – for displaying built-in media controls,
- > **width and height** – for specifying the dimensions of the player,
- > **autoplay** – for automatically playing the media when the page loads,
- > **loop** – for looping playback, and
- > **preload** – for buffering the media file.

Styling texts

```
<!DOCTYPE html>
<html Lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>the trial</title>

  <style>
    h1 {
      color: ■aliceblue;
      background-color: ■black;
      font-family: Lucid Sans;
      font-size: medium;
      font-weight: 200;
      font-style: oblique;
    }
  </style>
</head>
<body>
  <h1> This is just amazing! </h1>
</body>
</html>
```

Styling background

```
<!DOCTYPE html>
<html Lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>the trial</title>

  <style>
    body {
      margin: 0;
      padding: 0;
      height: 100vh;
      background: linear-gradient(to top,
        ■#2e1a12, ■#8b3a2b, ■#f6c177);
      overflow: hidden;
      text-align: center;
      color: ■#fdf6e3;
      font-family: 'Noto Serif SC', serif;
    }
  </style>
</head>
<body>
  <h1> This is just amazing! </h1>
</body>
</html>
```

 text

```
</head>
<body>
  <p> Woah what <span style="color:■aqua">a text</span> in this line</p>
</body>
</html>
```

<div> text

```
</head>
<body>
  <div style="border:1px solid ■black; padding: 10px;">
    <p> Woah what an amazing word in this line</p>
  </div>
</body>
</html>
```

<div> image

```
</head>
<body>
  <div style="border:1px solid ■black; padding: 10px;">
    
    
    
  </div>
</body>
</html>
```

<div> button

```
</head>
<body>
  <div>
    <button> 1 </button>
    <button> 2 </button>
  </div>
</body>
</html>
```

id text attribute

```
<!DOCTYPE html>
<html Lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>the trial</title>

  <style>
    #greeting {
      color: ■blue;
      font-size: large;
    }
  </style>
</head>
<body>
  <p> hello world </p>
  <p id="greeting"> hellow worldeu </p>
  <p> wow world </p>
</body>
</html>
```

class text attribute

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>the trial</title>

  <style>
    .greeting {
      background-color: blue;
      font-size: large;
      color: aliceblue;
      font-weight: bold;
    }
  </style>
</head>
<body>
  <p>hello world </p>
  <p class="greeting"> hellow worldeu </p>
  <p>wow world </p>
</body>
</html>
```

title text attribute

```
</head>
<body>
  <button type="button" title="click forda info">
    learnnnnn
  </button>
</body>
</html>
```

More Global Attributes

- > **accesskey**– lets you set a keyboard shortcut to focus or activate an element,
- > **lang**–sets the language for the content in an element,
- > **hidden**– controls if an element is shown or hidden,
- > **dir**–sets the direction of text in an element (like left-to-right or right-to-left),
- > **translate**– tells browsers whether the content should be translated or not,
- > **onclick**– runs a piece of JavaScript code when the element is clicked.

event text attribute

```
</head>
<body>
  <button onclick="alert('hellow worldeu')">click me</button>
</body>
</html>
```

More Event Attributes

- > **onclick**– executes a script when the element is clicked,
- > **onmouseover**– executes a script when the mouse pointer moves over the element,
- > **onmouseout**– executes a script when the mouse pointer moves out of the element,
- > **onkeydown**– executes a script when a keyboard key is pressed down,
- > **onkeyup**–executes a script when a keyboard key is released

data text attribute

```
<ul>
  <li data-recipe-id="001">
    <h2>Spaghetti with Meatballs</h2>
    <p>A classic Italian dish that's perfect for a cozy night in.</p>
    <button class="save-recipe">Save Recipe</button>
  </li>
  <li data-recipe-id="002">
    <h2>Chicken Tikka Masala</h2>
    <p>A flavorful Indian curry that's sure to please.</p>
    <button class="save-recipe">Save Recipe</button>
  </li>
  <li data-recipe-id="003">
    <h2>Beef and Broccoli Stir Fry</h2>
    <p>A quick and easy weeknight dinner that's packed with flavor.</p>
    <button class="save-recipe">Save Recipe</button>
  </li>
</ul>
```



HTML sample code

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport"
content="width=device-width,
initial-scale=1.0">
<title>Liyue Lantern Letter
🏮</title>

<style>
@import
url('https://fonts.googleapis.com/
css2?family=Cinzel:wght@500&family
=Noto+Serif+SC:wght@400&display=sw
ap');

body {
margin: 0;
padding: 0;
height: 100vh;
background: linear-gradient(to
top, #2c1a12, #8b3a2b, #f6c177);
overflow: hidden;
text-align: center;
color: #fdf6e3;
font-family: 'Noto Serif SC',
serif;
}
/* Title */
h1 {
margin-top: 70px;
font-size: 2.7rem;
```

```
letter-spacing: 2px;
text-shadow: 0 0 15px
rgba(255, 200, 120, 0.8);
animation: fadeIn 2s
ease-in-out;
}

.subtitle {
opacity: 0.8;
margin-bottom: 30px;
}
/* Button */
.button {
padding: 12px 30px;
border-radius: 30px;
border: 1px solid rgba(255,
220, 150, 0.7);
background: rgba(255, 200,
120, 0.15);
color: #fff;
font-size: 16px;
cursor: pointer;
transition: 0.4s;
}

.button:hover {
background: rgba(255, 200,
120, 0.35);
box-shadow: 0 0 20px rgba(255,
180, 100, 0.9);
}
/* Letter */
.letter {
display: none;
margin: 40px auto;
width: 80%;
max-width: 520px;
padding: 25px;
background: rgba(0,0,0,0.25);
border-radius: 15px;
```



```

    backdrop-filter: blur(6px);
    line-height: 1.8;
    font-size: 1.1rem;
    animation: fadeIn 2s
ease-in-out;
}
/* Lanterns */
.lantern {
    position: absolute;
    bottom: -50px;
    font-size: 30px;
    animation: rise linear
infinite;
}

@keyframes rise {
    to {
        transform:
translateY(-110vh);
        opacity: 0;
    }
}

@keyframes fadeIn {
    from {opacity: 0;}
    to {opacity: 1;}
}
</style>
</head>

<body>

<body>
<!-- Background Music -->
<audio id="bgm" autoplay loop>
    <source src="liyue.mp3"
type="audio/mpeg">
</audio>

<h1>Lanterns Over Liyue 🏮</h1>

```

```

<div class="subtitle">A promise
carried on warm evening
winds</div>

<button class="button"
onclick="startExperience()">
    Release the Lantern ✨
</button>

<div class="letter" id="letter">
    Like the harbor lights that
never fade,
        my feelings remain steady and
certain.

    In every contract written by
fate,
        I would sign my name beside
yours.

    If the lanterns rise tonight,
let them carry this truth-
my heart belongs with you.

    Will you walk beside me,
    beneath Liyue's golden sky?
</div>

<script>
function createLantern() {
    const lantern =
document.createElement("div");

lantern.classList.add("lantern");
    lantern.innerHTML = "🏮";
    lantern.style.left =
Math.random() * 100 + "vw";

lantern.style.animationDuration =
(Math.random() * 5 + 6) + "s";

```

```

    lantern.style.fontSize =
(Math.random() * 15 + 25) + "px";

document.body.appendChild(lantern)
;

setTimeout(() => {
    lantern.remove();
}, 10000);
}


setInterval(createLantern, 800);

function startExperience() {
    const music =
document.getElementById("bgm");
    music.volume = 0.4; // softer
volume
    music.play();

document.getElementById("letter") .
style.display = "block";
}
</script>

</body>
</html>

```

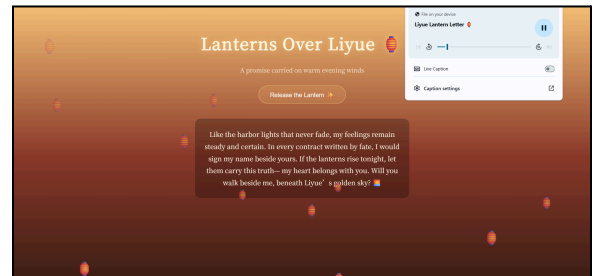

<!--may bg music sya-->

Note: NAG OVERTHINK AKO
MALALA DITO HAHAAAAHAH...info
galing ppt ni sir and super ultra mega
onti sa gpt...di ako sure dito kaya
pasabi if may mali ako pls
HAHAHAHAHAHA ARAL WELL
GAIS HAHAAAAH....AYOKO NA
RAWR

Ps. nag base ako sa message ni sir kaya
baka mag coding omsim

OUTPUT

