

2º Desafio: PaaS

Evidências da aplicação na Azure

1 Passo: Criando o serviço do Servidor Banco de Dados Azure + Grupo de Recursos

Variáveis:

RESOURCE_GROUP="rg-banco-trabalho-final"

LOCATION="southafricanorth"

MYSQL_SERVER="banco-falcoes-za"

MYSQL_ADMIN="dimdim" MYSQL_PASSWORD='Pa\$\$word26'

Criando Grupo:

az group create --name \$RESOURCE_GROUP --location \$LOCATION --output table

Criando Servidor: *az mysql*

*flexible-server create *

*--name \$MYSQL_SERVER *

*--resource-group \$RESOURCE_GROUP *

*--location \$LOCATION *

*--admin-user \$MYSQL_ADMIN *

*--admin-password \$MYSQL_PASSWORD *

*--sku-name Standard_B1ms *

*--version 8.0.21 *

*--public-access None *

--output table

```
Alternar para PowerShell  Reiniciar  Gerenciar arquivos  Nova sessão  Editor  Abrir no VS Code para a Web  Visualização da Web  Configurações  Ajuda

ludmila [ ~ ]$ RESOURCE_GROUP="rg-banco-trabalho-final"
LOCATION="southafricanorth"
MYSQL_SERVER="banco-falcoes-za"
MYSQL_ADMIN="dimdim"
MYSQL_PASSWORD='Pa$$word26'
ludmila [ ~ ]$ az group create --name $RESOURCE_GROUP --location $LOCATION --output table
Location      Name
-----
southafricanorth  rg-banco-trabalho-final
ludmila [ ~ ]$ az mysql flexible-server create \
--name $MYSQL_SERVER \
--resource-group $RESOURCE_GROUP \
--location $LOCATION \
--admin-user $MYSQL_ADMIN \
--admin-password $MYSQL_PASSWORD \
--sku-name Standard_B1ms \
--version 8.0.21 \
--public-access None \
--output table
Checking the existence of the resource group 'rg-banco-trabalho-final'...
Resource group 'rg-banco-trabalho-final' exists ? : True
IOPS is 396 which is either your input or free(maximum) IOPS supported for your storage size and SKU.
Creating MySQL Server 'banco-falcoes-za' in group 'rg-banco-trabalho-final'...
Your server 'banco-falcoes-za' is using sku 'Standard_B1ms' (Paid Tier). Please refer to https://aka.ms/mysql-pricing for pricing details
Creating MySQL database 'flexibleserverdb'...
Make a note of your password. If you forget, you would have to reset your password with 'az mysql flexible-server update -n banco-falcoes-za -g rg-banco-trabalho-final -p <new-password>'
Try using 'az mysql flexible-server connect' command to test out connection.
Table output unavailable. Use the --query option to specify an appropriate query. Use --debug for more info.
ludmila [ ~ ]$
```

2 Passo: Liberar o firewall *az mysql flexible-server update *

*--name \$MYSQL_SERVER *

*--resource-group \$RESOURCE_GROUP *

*--public-access Enabled *

--output table

```
ludmila [ ~ ]$ az mysql flexible-server update \
--name $MYSQL_SERVER \
--resource-group $RESOURCE_GROUP \
--public-access Enabled \
--output table
TIPS: 15 396 which is either your input or free(maximum) TIPS supported for your storage size and SKU.
AdministratorLogin AvailabilityZone DatabasePort FullVersion FullyQualifiedDomainName Location Name ReplicaCapacity ReplicationRole ResourceGroup State Vers
-----
dindin 1 3306 8.0.46 banco-falcoes-za.mysql.database.azure.com South Africa North banco-falcoes-za 10 None rg-banco-trabalho-final Ready 8.0.
ludmila [ ~ ]$
```

3 Passo: Criando Banco de Dados *DB_NAME="bddimdimdev"*

*az mysql flexible-server db create *

*--resource-group \$RESOURCE_GROUP *

*--server-name \$MYSQL_SERVER *

*--database-name \$DB_NAME *


--output table

```
ludmila [ ~ ]$ DB_NAME="bddimdimdev"
az mysql flexible-server db create \
--resource-group $RESOURCE_GROUP \
--server-name $MYSQL_SERVER \
--database-name $DB_NAME \
--output table
Creating database with utf8 charset and utf8_general_ci collation
Charset Collation Name ResourceGroup
-----
utf8mb4 utf8mb4_0900_ai_ci bddimdimdev rg-banco-trabalho-final
ludmila [ ~ ]$
```

4 Passo: Liberar acesso do Azure para dentro do Azure

Acessar

*Servidor do Banco de Dados do Azure para MySQL -> banco-falcoes-za -> Configurações -> Rede
-> Clicar para Permitir o acesso público de qualquer serviço Azure de dentro do Azure para esse
servidor -> Salvar*

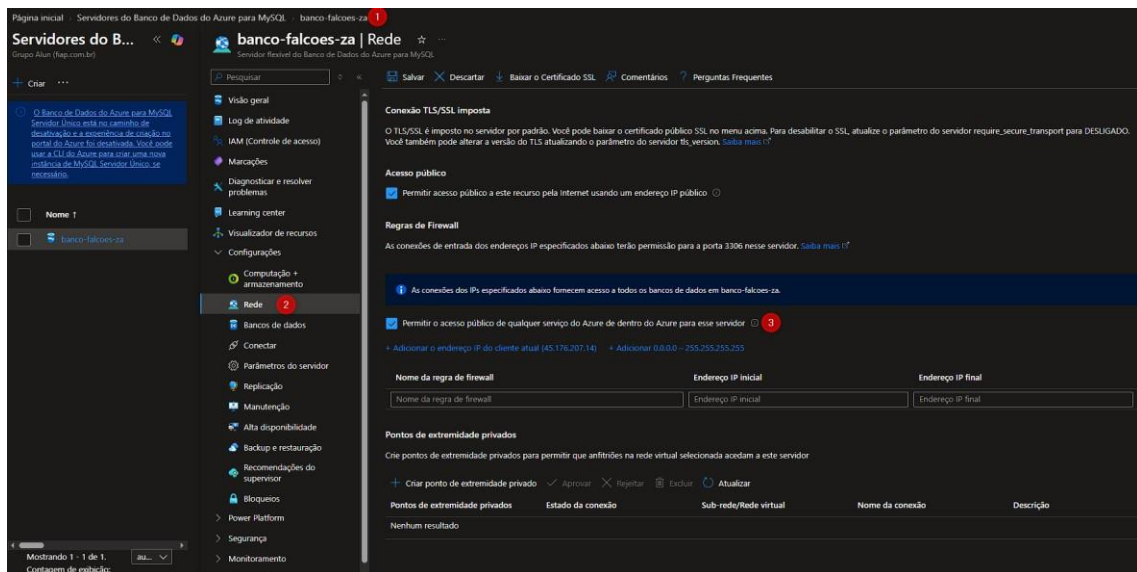

5 Passo: Conectando no Banco de Dados

mysql -h banco-falcoes-za.mysql.database.azure.com -u dimdim -p'Pa\$\$word26' bddimdimdev

```
ludmila [ ~ ]$ mysql -h banco-falcoes-za.mysql.database.azure.com -u dimdim -p'Pa$$word26' bddimdimdev
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MySQL connection id is 12
Server version: 8.0.46-azure Source distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MySQL [bddimdimdev]>
```

6 Passo: Validando o banco

```
MySQL [bddimdimdev]> show databases;
+-----+
| Database |
+-----+
| bddimdimdev |
| flexibleserverdb |
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
6 rows in set (0.219 sec)

MySQL [bddimdimdev]>
```

7 Passo: Criando a tabela

CREATE TABLE t_estado (SG_ESTADO CHAR(2), NM_ESTADO VARCHAR(70), DT_ANIVERSARIO DATE);

```
MySQL [bddimdev]> CREATE TABLE t_estado ( SG_ESTADO CHAR(2), NM_ESTADO VARCHAR(70), DT_ANIVERSARIO DATE );
Query OK, 0 rows affected (0.323 sec)

MySQL [bddimdev]>
```

8 Passo: Inserindo os Estados

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("AC", "Acre", "1962-06-15");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("AL", "Alagoas", "1817-09-16");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("AP", "Amapá", "1943-09-13");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("AM", "Amazonas", "1850-09-05");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("BA", "Bahia", "1823-07-02");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("CE", "Ceará", "1799-01-17");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("DF", "Distrito Federal", "1960-04-21");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("ES", "Espírito Santo", "1535-05-23");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("GO", "Goiás", "1889-12-21");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("MA", "Maranhão", "1535-03-11");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("MT", "Mato Grosso", "1748-05-09");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("MS", "Mato Grosso do Sul", "1977-10-11");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("MG", "Minas Gerais", "1720-12-02");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PA", "Pará", "1616-01-12");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PB", "Paraíba", "1585-08-05");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PR", "Paraná", "1853-12-19");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PE", "Pernambuco", "1817-03-06");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PI", "Piauí", "1822-10-19");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RJ", "Rio de Janeiro", "1565-03-01");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RN", "Rio Grande do Norte", "1501-08-07");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RS", "Rio Grande do Sul", "1807-09-19");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RO", "Rondônia", "1981-12-22");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RR", "Roraima", "1988-10-05");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SC", "Santa Catarina", "1738-08-11");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SP", "São Paulo", "1532-01-22");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SE", "Sergipe", "1820-07-08");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("TO", "Tocantins", "1988-10-05");
```

```
MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PI", "Piauí", "1822-10-19");
Query OK, 1 row affected (0.225 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RJ", "Rio de Janeiro", "1565-03-01");
Query OK, 1 row affected (0.226 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RN", "Rio Grande do Norte", "1501-08-07");
Query OK, 1 row affected (0.230 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RS", "Rio Grande do Sul", "1807-09-19");
Query OK, 1 row affected (0.225 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RO", "Rondônia", "1981-12-22");
Query OK, 1 row affected (0.230 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RR", "Roraima", "1988-10-05");
Query OK, 1 row affected (0.226 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SC", "Santa Catarina", "1738-08-11");
Query OK, 1 row affected (0.225 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SP", "São Paulo", "1532-01-22");
Query OK, 1 row affected (0.225 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SE", "Sergipe", "1820-07-08");
Query OK, 1 row affected (0.226 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("TO", "Tocantins", "1988-10-05");
Query OK, 1 row affected (0.226 sec)

MySQL [bddimdev]>
```

9 Passo: Visualizando

```
SELECT * FROM t_estado;
```



```
MySQL [bddimdimdev]> SELECT * FROM t_estado;
```

SG_ESTADO	NM_ESTADO	DT_ANIVERSARIO
AC	Acre	1962-06-15
AL	Alagoas	1817-09-16
AP	Amapá	1943-09-13
AM	Amazonas	1850-09-05
BA	Bahia	1823-07-02
CE	Ceará	1799-01-17
DF	Distrito Federal	1960-04-21
ES	Espírito Santo	1535-05-23
GO	Goiás	1889-12-21
MA	Maranhão	1535-03-11
MT	Mato Grosso	1748-05-09
MS	Mato Grosso do Sul	1977-10-11
MG	Minas Gerais	1720-12-02
PA	Pará	1616-01-12
PB	Paraíba	1585-08-05
PR	Paraná	1853-12-19
PE	Pernambuco	1817-03-06
PI	Piauí	1822-10-19
RJ	Rio de Janeiro	1565-03-01
RN	Rio Grande do Norte	1501-08-07
RS	Rio Grande do Sul	1807-09-19
RO	Rondônia	1981-12-22
RR	Roraima	1988-10-05
SC	Santa Catarina	1738-08-11
SP	São Paulo	1532-01-22
SE	Sergipe	1820-07-08
TO	Tocantins	1988-10-05

```
27 rows in set (0.219 sec)

MySQL [bddimdimdev]> █
```

10 Passo: Destruindo o ambiente

Digitando *exit* para sair do banco

```
6 rows in set (0.219 sec)

MySQL [bddimdimdev]> exit
Bye
ludmila [ ~ ]$ █
```

Destruindo servidor e validando *az group delete --name rg-banco-trabalho-final --yes --no-wait az group show --name rg-banco-trabalho-final*

```
ludmila [ ~ ]$ az group delete --name rg-banco-trabalho-final --yes --no-wait
ludmila [ ~ ]$ az group show --name rg-banco-trabalho-final
{
  "id": "/subscriptions/d9713a1b-1280-4615-a7d8-3df3921e9861/resourceGroups/rg-banco-trabalho-final",
  "location": "southafricanorth",
  "managedBy": null,
  "name": "rg-banco-trabalho-final",
  "properties": {
    "provisioningState": "Deleting"
  },
  "tags": null,
  "type": "Microsoft.Resources/resourceGroups"
}
ludmila [ ~ ]$ az group show --name rg-banco-trabalho-final
(ResourceGroupNotFound) Resource group 'rg-banco-trabalho-final' could not be found.
Code: ResourceGroupNotFound
Message: Resource group 'rg-banco-trabalho-final' could not be found.
ludmila [ ~ ]$
```