

2º Desafio: PaaS

Evidências da aplicação na Azure

1 Passo: Criando o serviço do Servidor Banco de Dados Azure + Grupo de Recursos

Variáveis:

RESOURCE_GROUP="rg-banco-trabalho-final"

LOCATION="southafricanorth"

MYSQL_SERVER="banco-falcoes-za"

MYSQL_ADMIN="dimdim"


MYSQL_PASSWORD='Pa\$\$word26'

Criando Grupo:

az group create --name \$RESOURCE_GROUP --location \$LOCATION --output table

Criando Servidor:

```
az mysql flexible-server create \  
  
--name $MYSQL_SERVER \  
  
--resource-group $RESOURCE_GROUP \  
  
--location $LOCATION \  
  
--admin-user $MYSQL_ADMIN \  
  
--admin-password $MYSQL_PASSWORD \  
  
--sku-name Standard_B1ms \  
  
--version 8.0.21 \  
  
--public-access None \  
  
--output table
```

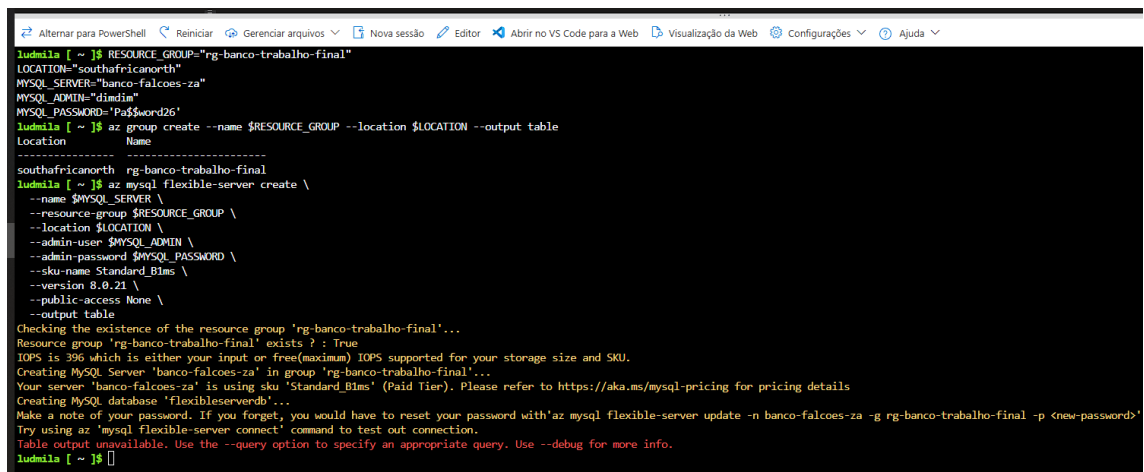

```
Alternar para PowerShell  Reiniciar  Gerenciar arquivos  Nova sessão  Editor  Abrir no VS Code para a Web  Visualização da Web  Configurações  Ajuda  ...  
ludmila [ ~ ]$ RESOURCE_GROUP="rg-banco-trabalho-final"  
LOCATION="southafricanorth"  
MYSQL_SERVER="banco-falcoes-za"  
MYSQL_ADMIN="dimdim"  
MYSQL_PASSWORD='Pa$$word26'  
ludmila [ ~ ]$ az group create --name $RESOURCE_GROUP --location $LOCATION --output table  
Location      Name  
-----  
southafricanorth  rg-banco-trabalho-final  
ludmila [ ~ ]$ az mysql flexible-server create \  
--name $MYSQL_SERVER \  
--resource-group $RESOURCE_GROUP \  
--location $LOCATION \  
--admin-user $MYSQL_ADMIN \  
--admin-password $MYSQL_PASSWORD \  
--sku-name Standard_B1ms \  
--version 8.0.21 \  
--public-access None \  
--output table  
Checking the existence of the resource group 'rg-banco-trabalho-final'...  
Resource group 'rg-banco-trabalho-final' exists ? : True  
IOPS is 396 which is either your input or free(maximum) IOPS supported for your storage size and SKU.  
Creating MySQL Server 'banco-falcoes-za' in group 'rg-banco-trabalho-final'...  
Your server 'banco-falcoes-za' is using sku 'Standard_B1ms' (Paid Tier). Please refer to https://aka.ms/mysql-pricing for pricing details  
Creating MySQL database 'Flexibleserverdb'...  
Make a note of your password. If you forget, you would have to reset your password with 'az mysql flexible-server update -n banco-falcoes-za -g rg-banco-trabalho-final -p <new-password>'.  
Try using 'az mysql flexible-server connect' command to test out connection.  
Table output unavailable. Use the --query option to specify an appropriate query. Use --debug for more info.  
ludmila [ ~ ]$
```

2 Passo: Liberar o firewall

```
az mysql flexible-server update \  
  --name $MYSQL_SERVER \  
  --resource-group $RESOURCE_GROUP \  
  --public-access Enabled \  
  --output table
```

```
ludmila [ ~ ]$ az mysql flexible-server update \  
  --name $MYSQL_SERVER \  
  --resource-group $RESOURCE_GROUP \  
  --public-access Enabled \  
  --output table  
IPS is 396 which is either your input or free(maximum) IPS supported for your storage size and SKU.  
AdministratorLogin AvailabilityZone DatabasePort FullVersion FullyQualifiedDomainName Location Name ReplicaCapacity ReplicationRole ResourceGroup State Vers  
-----  
ddim 1 3306 8.0.46 banco-falcoes-za.mysql.database.azure.com South Africa North banco-falcoes-za 10 None rg-banco-trabalho-final Ready 8.0.  
21  
ludmila [ ~ ]$
```

3 Passo: Criando Banco de Dados


```
DB_NAME="bddimdimdev"  
az mysql flexible-server db create \  
  --resource-group $RESOURCE_GROUP \  
  --server-name $MYSQL_SERVER \  
  --database-name $DB_NAME \  
  --output table
```

```
ludmila [ ~ ]$ DB_NAME="bddimdimdev"  
  
az mysql flexible-server db create \  
  --resource-group $RESOURCE_GROUP \  
  --server-name $MYSQL_SERVER \  
  --database-name $DB_NAME \  
  --output table  
Creating database with utf8 charset and utf8_general_ci collation  
Charset Collation Name ResourceGroup  
-----  
utf8mb4 utf8mb4_0900_ai_ci bddimdimdev rg-banco-trabalho-final  
ludmila [ ~ ]$
```

4 Passo: Liberar acesso do Azure para dentro do Azure

Acessar

Servidor do Banco de Dados do Azure para MySQL -> banco-falcoes-za -> Configurações -> Rede
-> Clicar para Permitir o acesso público de qualquer serviço Azure de dentro do Azure para esse servidor -> Salvar

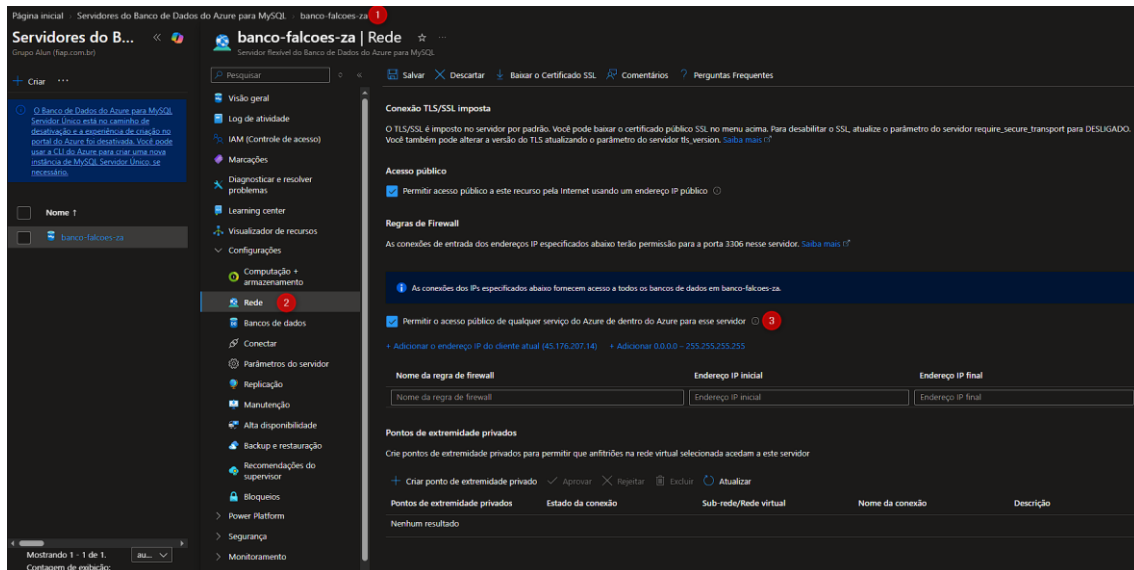

5 Passo: Conectando no Banco de Dados

mysql -h banco-falcoes-za.mysql.database.azure.com -u dimdim -p'Pa\$\$word26' bddimdimdev

```
ludmila [ ~ ]$ mysql -h banco-falcoes-za.mysql.database.azure.com -u dimdim -p'Pa$$word26' bddimdimdev
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MySQL connection id is 12
Server version: 8.0.46-azure Source distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MySQL [bddimdimdev]>
```

6 Passo: Validando o banco

```
MySQL [bddimdimdev]> show databases;
+-----+
| Database |
+-----+
| bddimdimdev |
| flexibleserverdb |
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
6 rows in set (0.219 sec)

MySQL [bddimdimdev]>
```

7 Passo: Criando a tabela

CREATE TABLE t_estado (SG_ESTADO CHAR(2), NM_ESTADO VARCHAR(70), DT_ANIVERSARIO DATE);

```
MySQL [bddimdev]> CREATE TABLE t_estado ( SG_ESTADO CHAR(2), NM_ESTADO VARCHAR(70), DT_ANIVERSARIO DATE );
Query OK, 0 rows affected (0.323 sec)

MySQL [bddimdev]>
```

8 Passo: Inserindo as cidades

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("AC", "Acre", "1962-06-15");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("AL", "Alagoas", "1817-09-16");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("AP", "Amapá", "1943-09-13");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("AM", "Amazonas", "1850-09-05");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("BA", "Bahia", "1823-07-02");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("CE", "Ceará", "1799-01-17");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("DF", "Distrito Federal", "1960-04-21");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("ES", "Espírito Santo", "1535-05-23");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("GO", "Goiás", "1889-12-21");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("MA", "Maranhão", "1535-03-11");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("MT", "Mato Grosso", "1748-05-09");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("MS", "Mato Grosso do Sul", "1977-10-11");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("MG", "Minas Gerais", "1720-12-02");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PA", "Pará", "1616-01-12");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PB", "Paraíba", "1585-08-05");
```

```
INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PR", "Paraná", "1853-12-19");
```

*INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PE",
"Pernambuco", "1817-03-06");*

*INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PI", "Piauí",
"1822-10-19");*

*INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RJ", "Rio de
Janeiro", "1565-03-01");*

*INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RN", "Rio
Grande do Norte", "1501-08-07");*

*INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RS", "Rio
Grande do Sul", "1807-09-19");*

*INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RO",
"Rondônia", "1981-12-22");*

*INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RR", "Roraima",
"1988-10-05");*

*INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SC", "Santa
Catarina", "1738-08-11");*

*INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SP", "São
Paulo", "1532-01-22");*

*INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SE", "Sergipe",
"1820-07-08");*

*INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("TO",
"Tocantins", "1988-10-05");*

```
MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("PI", "Piauí", "1822-10-19");
Query OK, 1 row affected (0.225 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RJ", "Rio de Janeiro", "1565-03-01");
Query OK, 1 row affected (0.226 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RN", "Rio Grande do Norte", "1501-08-07");
Query OK, 1 row affected (0.230 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RS", "Rio Grande do Sul", "1807-09-19");
Query OK, 1 row affected (0.225 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RO", "Rondônia", "1981-12-22");
Query OK, 1 row affected (0.230 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("RR", "Roraima", "1988-10-05");
Query OK, 1 row affected (0.226 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SC", "Santa Catarina", "1738-08-11");
Query OK, 1 row affected (0.225 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SP", "São Paulo", "1532-01-22");
Query OK, 1 row affected (0.225 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("SE", "Sergipe", "1820-07-08");
Query OK, 1 row affected (0.226 sec)

MySQL [bddimdev]> INSERT INTO t_estado(SG_ESTADO, NM_ESTADO, DT_ANIVERSARIO) VALUES ("TO", "Tocantins", "1988-10-05");
Query OK, 1 row affected (0.226 sec)

MySQL [bddimdev]>
```

9 Passo: Visualizando

*SELECT * FROM t_estado;*

```
MySQL [bddimdimdev]> SELECT * FROM t_estado;
```

SG_ESTADO	NM_ESTADO	DT_ANIVERSARIO
AC	Acre	1962-06-15
AL	Alagoas	1817-09-16
AP	Amapá	1943-09-13
AM	Amazonas	1850-09-05
BA	Bahia	1823-07-02
CE	Ceará	1799-01-17
DF	Distrito Federal	1960-04-21
ES	Espírito Santo	1535-05-23
GO	Goiás	1889-12-21
MA	Maranhão	1535-03-11
MT	Mato Grosso	1748-05-09
MS	Mato Grosso do Sul	1977-10-11
MG	Minas Gerais	1720-12-02
PA	Pará	1616-01-12
PB	Paraíba	1585-08-05
PR	Paraná	1853-12-19
PE	Pernambuco	1817-03-06
PI	Piauí	1822-10-19
RJ	Rio de Janeiro	1565-03-01
RN	Rio Grande do Norte	1501-08-07
RS	Rio Grande do Sul	1807-09-19
RO	Rondônia	1981-12-22
RR	Roraima	1988-10-05
SC	Santa Catarina	1738-08-11
SP	São Paulo	1532-01-22
SE	Sergipe	1820-07-08
TO	Tocantins	1988-10-05

```
27 rows in set (0.219 sec)

MySQL [bddimdimdev]>
```

10 Passo: Destruindo o ambiente

Digitando *exit* para sair do banco

```
6 rows in set (0.219 sec)

MySQL [bddimdimdev]> exit
Bye
ludmila [ ~ ]$
```

Destruindo servidor e validando

```
az group delete --name rg-banco-trabalho-final --yes --no-wait
```

az group show --name rg-banco-trabalho-final

```
ludmila [ ~ ]$ az group delete --name rg-banco-trabalho-final --yes --no-wait
ludmila [ ~ ]$ az group show --name rg-banco-trabalho-final
{
  "id": "/subscriptions/d9713a1b-1280-4615-a7d8-3df3921e9861/resourceGroups/rg-banco-trabalho-final",
  "location": "southafricanorth",
  "managedBy": null,
  "name": "rg-banco-trabalho-final",
  "properties": {
    "provisioningState": "Deleting"
  },
  "tags": null,
  "type": "Microsoft.Resources/resourceGroups"
}
ludmila [ ~ ]$ az group show --name rg-banco-trabalho-final
(ResourceGroupNotFound) Resource group 'rg-banco-trabalho-final' could not be found.
Code: ResourceGroupNotFound
Message: Resource group 'rg-banco-trabalho-final' could not be found.
ludmila [ ~ ]$
```