

Setting Up the Application Development Environment in Oracle® Solaris 11



Part No: E54831
November 2016

Part No: E54831

Copyright © 2010, 2016, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS. Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Référence: E54831

Copyright © 2010, 2016, Oracle et/ou ses affiliés. Tous droits réservés.

Ce logiciel et la documentation qui l'accompagne sont protégés par les lois sur la propriété intellectuelle. Ils sont concédés sous licence et soumis à des restrictions d'utilisation et de divulgation. Sauf stipulation expresse de votre contrat de licence ou de la loi, vous ne pouvez pas copier, reproduire, traduire, diffuser, modifier, accorder de licence, transmettre, distribuer, exposer, exécuter, publier ou afficher le logiciel, même partiellement, sous quelque forme et par quelque procédé que ce soit. Par ailleurs, il est interdit de procéder à toute ingénierie inverse du logiciel, de le désassembler ou de le décompiler, excepté à des fins d'interopérabilité avec des logiciels tiers ou tel que prescrit par la loi.

Les informations fournies dans ce document sont susceptibles de modification sans préavis. Par ailleurs, Oracle Corporation ne garantit pas qu'elles soient exemptes d'erreurs et vous invite, le cas échéant, à lui en faire part par écrit.

Si ce logiciel, ou la documentation qui l'accompagne, est livré sous licence au Gouvernement des Etats-Unis, ou à quiconque qui aurait souscrit la licence de ce logiciel pour le compte du Gouvernement des Etats-Unis, la notice suivante s'applique:

U.S. GOVERNMENT END USERS. Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

Ce logiciel ou matériel a été développé pour un usage général dans le cadre d'applications de gestion des informations. Ce logiciel ou matériel n'est pas conçu ni n'est destiné à être utilisé dans des applications à risque, notamment dans des applications pouvant causer des dommages corporels. Si vous utilisez ce logiciel ou matériel dans le cadre d'applications dangereuses, il est de votre responsabilité de prendre toutes les mesures de secours, de sauvegarde, de redondance et autres mesures nécessaires à son utilisation dans des conditions optimales de sécurité. Oracle Corporation et ses affiliés déclinent toute responsabilité quant aux dommages causés par l'utilisation de ce logiciel ou matériel pour ce type d'applications.

Oracle et Java sont des marques déposées d'Oracle Corporation et/ou de ses affiliés. Tout autre nom mentionné peut correspondre à des marques appartenant à d'autres propriétaires qu'Oracle.

Intel et Intel Xeon sont des marques ou des marques déposées d'Intel Corporation. Toutes les marques SPARC sont utilisées sous licence et sont des marques ou des marques déposées de SPARC International, Inc. AMD, Opteron, le logo AMD et le logo AMD Opteron sont des marques ou des marques déposées d'Advanced Micro Devices. UNIX est une marque déposée d'The Open Group.

Ce logiciel ou matériel et la documentation qui l'accompagne peuvent fournir des informations ou des liens donnant accès à des contenus, des produits et des services émanant de tiers. Oracle Corporation et ses affiliés déclinent toute responsabilité ou garantie expresse quant aux contenus, produits ou services émanant de tiers, sauf mention contraire stipulée dans un contrat entre vous et Oracle. En aucun cas, Oracle Corporation et ses affiliés ne sauraient être tenus pour responsables des pertes subies, des coûts occasionnés ou des dommages causés par l'accès à des contenus, produits ou services tiers, ou à leur utilisation, sauf mention contraire stipulée dans un contrat entre vous et Oracle.

Accessibilité de la documentation

Pour plus d'informations sur l'engagement d'Oracle pour l'accessibilité à la documentation, visitez le site Web Oracle Accessibility Program, à l'adresse <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Accès aux services de support Oracle

Les clients Oracle qui ont souscrit un contrat de support ont accès au support électronique via My Oracle Support. Pour plus d'informations, visitez le site <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> ou le site <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> si vous êtes malentendant.

Contents

- Using This Documentation** 7
- 1 Introduction to Setting Up an Application Development Environment in Oracle Solaris 11** 9
 - Installing Software Useful for Application Development 9
 - Installing Oracle Solaris Studio 11
 - Installing Web and Application Servers 12
 - Apache Web Server 12
 - Oracle iPlanet Web Server 12
 - Oracle HTTP Server 13
 - Installing a Version Control System 13
 - Installing a Database 13
 - Oracle Database 14
 - MySQL Database 14
 - Debugging Applications 15
 - Creating IPS Packages 16
 - Configuring Boot Environments 16
- 2 Creating a Virtual Development Environment** 19
 - Virtualizing Your Development Environment 19
 - Choosing a Virtualization Option 19
 - Choosing a Virtualization Technology 22
 - Virtualization Tools 23

Using This Documentation

- **Overview** – This book provides an introduction to setting up a development environment on the Oracle Solaris 11 operating system and also provides links to sources of detailed information that would be useful for developers.
- **Audience** – Developers using a variety of programming languages including C, C++, Java, PHP, and Ruby.
- **Required knowledge** – Readers of this guide should be familiar with basic experience in developing applications.

Product Documentation Library

Documentation and resources for this product and related products are available at <http://www.oracle.com/pls/topic/lookup?ctx=E53394>.

Feedback

Provide feedback about this documentation at <http://www.oracle.com/goto/docfeedback>.

Introduction to Setting Up an Application Development Environment in Oracle Solaris 11

Setting up an application development environment involves activities such as installing developer tools, installing and configuring web servers, installing databases and so on. Oracle Solaris 11 provides various packages and tools that enable you to develop applications. This document covers the following topics:

- [“Installing Software Useful for Application Development” on page 9](#)
- [“Installing Oracle Solaris Studio” on page 11](#)
- [“Installing Web and Application Servers” on page 12](#)
- [“Installing a Version Control System” on page 13](#)
- [“Installing a Database” on page 13](#)
- [“Debugging Applications” on page 15](#)
- [“Creating IPS Packages” on page 16](#)
- [“Configuring Boot Environments” on page 16](#)

Installing Software Useful for Application Development

The Oracle Solaris 11 OS provides various software packages that enable you to develop, debug, and maintain applications. The packages listed in the following table are likely to be helpful when developing applications on the Oracle Solaris operating system.

TABLE 1 Developer-Related Packages

Package	Description
group/feature/amp	AMP (Apache, MySQL, PHP) Deployment Kit for Oracle Solaris
group/feature/developer-gnu	GNU Development Tools
developer/build/ant	Apache Ant
developer/build/automake	Makefile generator
developer/build/gnu-make	A utility for directing compilation

Package	Description
developer/debug/gdb	GNU project debugger
developer/debug/mdb	Modular debugger
developer/documentation-tool/openjade	DSSSL engine for SGML documents
developer/documentation-tool/gtk-doc	GTK+ Docbook generator
developer/lexer/flex	Flex lexical analyzer
developer/ui-designer/glade	GNOME UI designer
developer/vala	Vala programming language
developer/java/jdk	Java Platform Standard Edition Development Kit
library/libmemcached	An open-source C/C++ client library and tools for the memcached server
web/java-servlet/tomcat	Tomcat Servlet/JSP Container
runtime/perl-512	Perl
library/python/ipython	Enhanced interactive Python shell
runtime/ruby-21	Ruby & RubyGems
library/java/grails	A web application framework
runtime/tcl-8	Tcl, a portable scripting environment
web/proxy/squid	Squid web proxy cache
web/server/lighttpd-14	Lighttpd web server
web/editor/bluefish	Bluefish, a powerful editor for experienced web designers
developer/dtrace/toolkit	A collection of useful documented DTrace scripts
web/php-56	PHP server
developer/gcc-45	GCC, 4.5 compilers
developer/gcc-47	GCC, 4.7 compilers
developer/gcc-48	GCC, 4.8 compilers
developer/versioning/cvs	CVS version control system
developer/versioning/git	Git version control system
developer/versioning/mercurial	Mercurial version control system
developer/versioning/subversion	Subversion version control system
developer/build/pkg-config	Software configuration query tool

Tip - To view a comprehensive list of packages useful for development, type `pkg list -as 'developer/*'` in a terminal window.

Use the `pkg` command to install or update a software. For example, to install Ruby, you would run the following command:

```
$ pkg install runtime/ruby-21
```

For information about the `pkg` command, see [pkg\(1\)](#) and [Adding and Updating Software in Oracle Solaris 11.3](#).

Installing Oracle Solaris Studio

Oracle Solaris Studio consists of two suites of tools: a compiler suite and an analysis suite. The tools of each suite are designed to work together to provide an optimized development environment for the development of single, multithreaded, and distributed applications.

Oracle Solaris Studio provides everything you need to develop C, C++, and Fortran applications to run in Oracle Solaris 10 or Oracle Solaris 11 on SPARC or x86 and x64 platforms, or in Oracle Linux on x86 and x64 platforms. The compilers and analysis tools are engineered to make your applications run optimally on Oracle Solaris systems.

The components of Oracle Solaris Studio include:

- **IDE** – An integrated development environment for application development in a graphical environment. The Oracle Solaris Studio IDE integrates several other Oracle Solaris Studio tools and uses Oracle Solaris technologies such as DTrace.
- **C compiler** – Includes a C compiler, incremental link editor, and lint program.
- **C++ compiler** – Includes a full-featured C++ compiler and interval arithmetic library.
- **Fortran compiler** – Includes a full-featured environment and libraries for both f95 and f77.
- **dbx debugger** – An interactive, source-level, command-line debugging tool.
- **dmake make tool** – A command-line tool for building targets in distributed, parallel, or serial mode.
- **Math libraries** – A floating-point environment that is supported by software and hardware on SPARC and x86 system that run the Oracle Solaris OS.
- **OpenMP** – A portable, pragma-based parallel programming model for shared memory multiprocessor architectures. It is natively accepted and compiled by all three Oracle Solaris Studio compilers.
- **Performance Analyzer** – A GUI and command-line tool for collecting and analyzing performance data.
- **Thread Analyzer** – A GUI and command-line tool for analyzing the execution of multithreaded programs and checking for a variety of multithreaded programming errors.
- **Oracle Performance Library** – A library of Oracle-specific extensions and features for using optimized, high-speed mathematical subroutines for solving linear algebra and other numerically intensive problems.

Oracle Solaris Studio is freely available for production use on Oracle Solaris and Linux operating systems. It is available both as an IPS package and a tar file. You can download Oracle Solaris Studio from the Oracle Technology Network (OTN) [Oracle Solaris Studio 12.4](#) website.

Note - To download the software you must have an Oracle web account. If you do not have an Oracle web account, you can [sign up](#) for free.

To install Oracle Solaris Studio IPS packages, you must have a key and a certificate. Visit the <http://pkg-register.oracle.com> site and follow the instructions to install the key and certificate.

Installing Web and Application Servers

As a developer, you might need an application server to test your programs, deploy your applications, and run test scenarios. This section describes the servers that you can install.

By default, the Apache web server package (web/server/apache-22) is included in solaris-minimal-server installation package.

Apache Web Server

Apache is a widely used open-source web server. Apache web server version 2.4 is available as an IPS package for Oracle Solaris 11 operating system. For more information on the Apache web server, see the [Apache documentation](#).

▼ How to install the Apache Web Server

1. **Type the following command:**

```
$ pkg install web/server/apache-24
```

Tip - Alternately, you can install the group/feature/amp package. This package contains Apache web server, MySQL database, and PHP.

2. **Enable the server so that it listens to the incoming HTTP requests.**

```
$ svcadm -v enable /network/http:apache24
```
3. **To verify that the web server works, open the `http://localhost:80` link in a web browser. A valid web page should be displayed.**

Oracle iPlanet Web Server

Oracle iPlanet Web Server is a high-performance web server that improves web security, enhances the end-user experience, and reduces the cost and complexity of deploying and

managing web applications. It is available on the Oracle Solaris, Windows, HP-UX, AIX, and GNU/Linux platforms. It supports the JSP and Java Servlet technologies, PHP, NSAPI, CGI, and ColdFusion.

Oracle iPlanet Web Server is available for download at the [Oracle iPlanet Web Server](#) website.

For installation instructions, see [How to Install Oracle iPlanet Web Server](#).

Oracle HTTP Server

Oracle HTTP Server is the web server component for Oracle Fusion Middleware. It provides a listener for Oracle WebLogic Server and the framework for hosting static pages, dynamic pages, and applications over the web.

Oracle HTTP Server serves static content directly or through standard interfaces such as the WebDAV standard. It provides features such as single sign-on, clustered deployment, and high availability. You can use it as a proxy server, both forward and reverse. A reverse proxy enables content served by different servers to appear as if coming from a single server.

For more information, see the [Oracle HTTP Server](#) website.

Installing a Version Control System

Oracle Solaris does not have a proprietary version control system. However, you can install and configure an open-source version control system. Some of the open-source version control systems that are available as IPS package are listed in the following table.

TABLE 2 Version Control Packages

Software	IPS Package Name
CVS	developer/versioning/cvs
Git	developer/versioning/git
Mercurial	developer/versioning/mercurial
Subversion	developer/versioning/subversion
SCCS	developer/versioning/sccs

Installing a Database

The Oracle Solaris operating system supports Oracle, MySQL, Berkeley DB, PostgreSQL, and SQLite databases. Open-source databases might not be available as an IPS package and you have to download these software from third party websites.

The following sections provide brief installation information about Oracle and MySQL databases.

Oracle Database

Oracle Database is available in different editions. To view the comparison between the various editions, see [Oracle Database 12c Enterprise Edition](#) website.

You might find the following resources useful:

- [Oracle Database 12c Release 1 \(12.1\) Documentation Library](#)
- [Oracle Database 12c Release 1 \(12.1\) Solaris Installation Guides](#)

Note - As a pre-requisite to install the Oracle Database on Oracle Solaris, you must install the group/prerequisite/oracle/oracle-rdbms-server-12-1-preinstall group package. This group package has all the required packages.

MySQL Database

The MySQL database is available as an IPS package. For information on using MySQL, see [MySQL 5.6 Reference Manual](#).

▼ How to install the MySQL IPS Package

1. **Type the following command:**

```
$ pkg install database/mysql-56
```

After the installation is complete, you must start the database.

2. **Start the database:**

```
$ svcadm enable mysql
```

3. **Type mysql in a terminal window to access the mysql> prompt.**

For example:

```
mysql> show databases;
Database
information_schema
mysql
test
```

```
3 rows in set (0.01 sec)
```

```
mysql> quit;  
Bye
```

For more information about tuning ZFS for database, see [“Tuning ZFS for Database Products” in Oracle Solaris 11.3 Tunable Parameters Reference Manual](#).

Debugging Applications

When you are developing an application, debugging the application becomes an important part of application development. Debugging tools are available that enable you to debug complex software systems effortlessly. The commonly used debugging tools are as follows:

- **mdb**— It is an extensible, general purpose debugging tool for the Oracle Solaris operating system. mdb allows you to debug at assembly language level. By using mdb, you can debug the Oracle Solaris kernel and associated device drivers and modules. Along with mdb you can use libumem to find memory leaks and bugs in applications. For information, see:
 - [Oracle Solaris Modular Debugger Guide](#)
 - https://blogs.oracle.com/jwadams/entry/debugging_with_libumem_and_mdb
 - http://web.archive.org/web/20080212075502/http://developers.sun.com/solaris/articles/libumem_library.html
- **gdb**— You can use the GNU debugger, commonly called as gdb to debug applications, gdb allows you to analyse and debug programs at runtime. It also allows you add specific breakpoints to examine the program. For more information, see [GNU Debugger](#).
- **dtrace**— It is a comprehensive dynamic tracing framework for the Oracle Solaris OS. The Dtrace facility enables you to concisely answer questions about the behavior of the operating system and user programs. Dtrace can help you to identify performance issues and bugs in applications. For more information, see [Oracle Solaris 11.3 DTrace \(Dynamic Tracing\) Guide](#).
- Oracle Solaris Studio provides the following tools for debugging applications.
 - **dbx** — It is an interactive, source-level debugging tool, which is used to run a program in a controlled manner. It gives you complete control of dynamic execution of a program such as collecting performance and memory usage data, monitoring memory access, and detecting memory leaks. You can also use the GUI version of dbx by running the dbxtool command. For more information, see [Oracle Solaris Studio 12.4: Debugging a Program With dbx](#) and [Oracle Solaris Studio 12.4: dbxtool Tutorial](#).
 - **discover** — It is a command line utility that helps to detect memory access errors in your code. For more information, see [Locating Memory Access Errors With Sun Memory Error Discovery Tool](#) and [Memory Error Discovery Tool \(discover\)](#).
 - **Code Analyzer** — It is an integrated set of tools that helps you to ensure application reliability and security by detecting application vulnerabilities, including memory leaks

and memory access violations. For more information, see [Oracle Solaris Studio 12.4: Code Analyzer User's Guide](#) and [Oracle Solaris Studio 12.4: Code Analyzer Tutorial](#).

- Collector and Performance Analyzer – These tools perform statistical profiling of a wide range of performance data and tracing of various system calls, and relate the data to program structure at the function, source-level, and instruction levels. For more information, see [Oracle Solaris Studio 12.4: Performance Analyzer](#) and [Oracle Solaris Studio 12.4: Performance Analyzer Tutorials](#).
- Thread Analyzer – It can detect hard to find complex parallel programming errors. Thread Analyzer supports POSIX, OpenMP, and Oracle Solaris threads. For more information, see [Oracle Solaris Studio 12.4: Thread Analyzer User's Guide](#).

Creating IPS Packages

In the Oracle Solaris 11 operating system, you should deliver the software you develop as Image Package System (IPS) packages. IPS packages are installed and updated from IPS repositories.

IPS is a framework for complete software life cycle management including packaging, installing, upgrading, and removing software. You must deliver software as IPS packages to obtain the following benefits:

- Automatically calculate sufficient correct dependencies on other software
- Automatically install or update dependency software as needed
- Automatically refresh or restart necessary system services to perform tasks such as software configuration and automatically starting other dependent services
- Form a single package, automatically install only the components appropriate for the existing system architecture, or other variants
- Make updates in a new boot environment without modifying the existing boot environment
- Enable users to easily verify whether the software installation is correct

For more information about creating IPS packages, see [Packaging and Delivering Software With the Image Packaging System in Oracle Solaris 11.3](#).

Configuring Boot Environments

A boot environment is a bootable instance of the Oracle Solaris operating system image along with any other software packages installed in that image. You can maintain multiple boot environments on your systems, and each boot environment can have different software versions installed. You can backup the current boot environment, you can update software without any risk of loss of data or the system environment. You can also update a boot environment that is currently not active. Use the [beadm\(1M\)](#) utility to create and manage boot environments.

You can use zones which can help you to maintain multiple boot environments with different versions of softwares installed. Zones can be a huge advantage when you do not have to reboot the system to access another environment. You can also use kernel zones to maintain different versions of OS. Oracle Solaris system allows you to have several non-global zones, several kernel zones, and non-global zones inside a kernel zone. You can easily ssh to one of the zones without rebooting the physical machine.

For more information about boot environments, see [Creating and Administering Oracle Solaris 11.3 Boot Environments](#).

Creating a Virtual Development Environment

A virtual development environment (VDE) is an application development environment (ADE) set up on a virtual machine. By using virtual machines, you can work with multiple Operating Systems (OS) without the need for a separate hardware for each OS. Oracle Solaris offers multiple options for setting up and configuring virtual environments. This document states how you can choose, set up, and configure the virtual environment. Because a virtual machine acts like a physical machine for the purposes of hosting an ADE, the process for setting up the ADE is the same for virtual or physical machines. This chapter provides guidelines for choosing, setting up, and configuring a virtual environment to host your ADE.

Virtualizing Your Development Environment

Virtualizing your development environment through Oracle Solaris has multiple benefits:

- Saving downtime – A VDE helps you reduce downtime by enabling you to develop your application in a virtual machine (VM) that is backed up and easily restored. A VM that is backed up on one system can be restored on a different system.
- Protecting hardware – Because VMs are virtual, developing applications on VMs cannot damage your hardware, which enables you to perform risky procedures safely. You can back up and restore easily without any damage to the underlying physical machine.
- Simulating production environment – Setting up a virtual development environment mimicking your production environment helps ensure that testing and developing your applications will produce useful results.
- Security – Strong security features mean you can use your VDE without compromising on security.
- Multiple OS versions – Virtualizing the development environment allows you to work with different versions of operating systems on a single physical machine.

Choosing a Virtualization Option

Before you can install your ADE, you need to plan and set up the virtualized environment that will host the ADE. One important consideration is the balance between isolation and flexibility.

The following table describes the virtualization models available for Oracle Solaris.

TABLE 3 Virtualization Models Available for Oracle Solaris

Virtualization Model	Virtualization Technology	Description
Operating System Virtualization	<ul style="list-style-type: none"> ■ Oracle Solaris Zones ■ Oracle Solaris Kernel Zones 	Each environment contains what appears to be a private copy of the OS in a container. The OS virtualization model provides near-native performance and flexibility, and has a much smaller disk, RAM, and CPU footprint than either virtual machines or physical machine.
Virtual Machines	<ul style="list-style-type: none"> ■ Oracle VM Server for SPARC systems ■ Oracle VM Server for x86 systems ■ Oracle VM Virtual Box 	By using virtual machines, you can run multiple OS instances with a single set of hardware resources. Each virtual machine that you create runs its own OS. A software or firmware hypervisor creates the illusion that each guest OS instance is running on its own system. Although virtual machines provide less resource flexibility than a physical machine that uses OS virtualization, they provide more isolation.
Physical Domains	Oracle SPARC Enterprise M-Series servers	Hardware partitions provide physical separation between the running OS and its separate set of resources and power. Because this model does not use a hypervisor, it provides bare-metal performance. This virtualization model provides the most isolation but it is much less flexible with resource configuration than either the virtual machine or OS virtualization model.

The following diagrams illustrate some of the virtualization models described in the table.

FIGURE 1 OS Virtualization by Using Oracle Solaris Kernel Zones

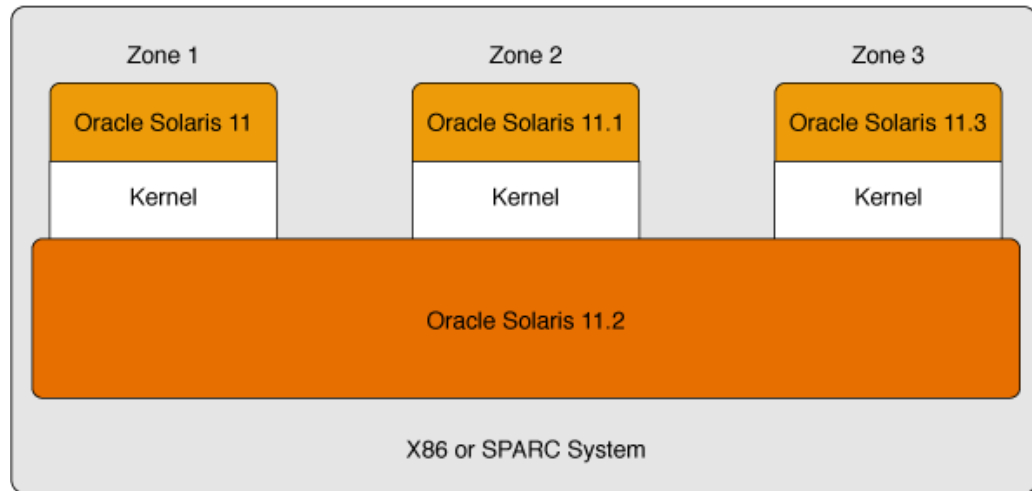


FIGURE 2 Using Virtual Machines on an Oracle SPARC System


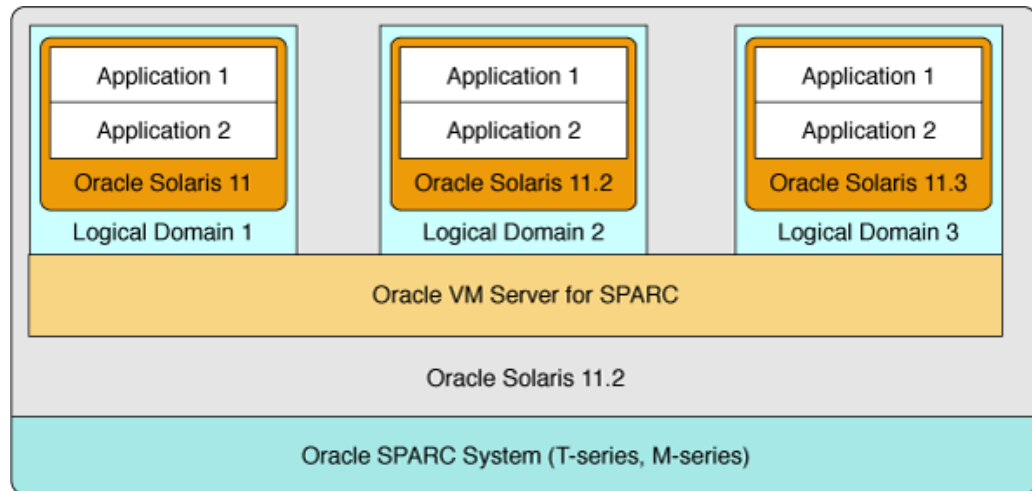


FIGURE 3 Using Virtual Machines on an Oracle x86 System

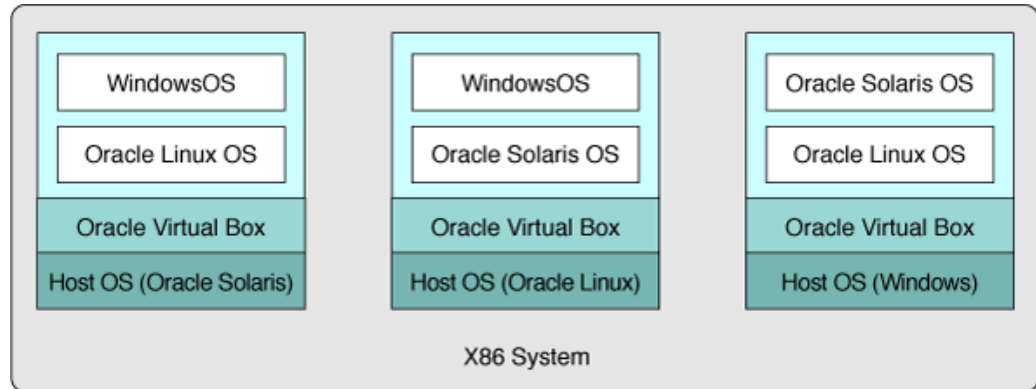

Choosing a Virtualization Technology

Oracle Solaris provides virtualization technologies that you can use in various virtualization models. This section focuses on compute virtualization relevant to creating a virtual development environment. For more information about how virtual environments are managed in a network, see [Introduction to Oracle Solaris 11 Virtual Environments](#).

TABLE 4 Using Oracle Solaris Virtualization Technology in Your Environment

Virtualization Technology	Description	Sample Usage Scenarios	Using the Technology
Oracle Solaris Zones	A virtualized operating system environment created within a single instance of the Oracle Solaris operating system.	<ul style="list-style-type: none"> ■ Provide better resource management and control by installing similar applications in a common zone. ■ Balance workloads by logically separating the system. ■ Test migration scenarios for applications. 	<ul style="list-style-type: none"> ■ Introduction to Oracle Solaris Zones ■ Oracle Solaris Zones Configuration Resources ■ Creating and Using Oracle Solaris Zones
Oracle Solaris Kernel Zones	A zone with its own kernel and OS installation separate from the global zone.	<ul style="list-style-type: none"> ■ Install multiple Oracle Solaris OS versions on a single physical machine. ■ Test migration scenarios for applications. 	<ul style="list-style-type: none"> ■ Introduction to Oracle Solaris Zones ■ Creating and Using Oracle Solaris Kernel Zones

Virtualization Technology	Description	Sample Usage Scenarios	Using the Technology
		<ul style="list-style-type: none"> Require enhanced security and more isolation. 	
Oracle VM Server for SPARC system	Hypervisor-based virtualization for SPARC servers.	Deploy and configure different versions of the Oracle Solaris OS on SPARC T-Series and SPARC M-Series servers.	Oracle VM Server for SPARC documentation
Oracle VM Server for x86 system (Xen)	Hypervisor-based virtualization for x86 based servers.	Deploy and configure x86 system with heterogeneous operating systems, including the Oracle Solaris 10 OS and the Oracle Solaris 11 as OS guests.	Oracle VM Server for x86 documentation
Oracle VM VirtualBox	Hosted workstation and server virtualization for x86 based systems.	Develop and test software on different OS platforms. For example, you can install Oracle Solaris and Oracle Linux on a Windows system.	Oracle VM VirtualBox documentation
Physical domains (Also called as hardware partitions)	Electrical isolation into domains on Oracle SPARC M-Series servers.	Create multiple physical server entities that work independently of each other on a single hardware.	Oracle SPARC M-Series Server documentation

Virtualization Tools

The following tools help make the process of installing and managing your virtual environment faster and simpler.

- **Oracle Solaris VM Templates** – Facilitate fast installation of Oracle Solaris virtual environments. The following types of Oracle Solaris VM templates are available:
 - Oracle VM Templates for SPARC system
 - Oracle VM Templates for x86 system
 - Oracle VM Templates for Oracle VM VirtualBox

For more information, see the [Oracle Solaris VM Templates](#) product page.

- **Oracle Solaris Unified Archives** – Used for virtual environment backup and recovery as well as for cloning and redeploying virtual environments. For more information, see [Using Unified Archives for System Recovery and Cloning in Oracle Solaris 11.3](#).
- **OpenStack Juno** – Enables you to develop cloud-based applications. For more information, see [Installing and Configuring OpenStack \(Havana\) in Oracle Solaris](#).
- **Oracle Solaris Resource Manager** – Resource management features used with Oracle Solaris Zones to further refine the application environment. For more information, see [Administering Resource Management in Oracle Solaris 11.3](#).

- **Oracle Secure Global Desktop** – A secure remote access solution for cloud-hosted enterprise applications and desktops, that enables you to access your VDE to work securely from any system and any location. For more information, see the [Oracle Secure Global Desktop](#) product page.