

Réunion Louis + Nahuel + Konstantin



Seminar of the NEO team (Inria Sophia Antipolis)

Louis HAUSEUX (Inria Sophia Antipolis, superv. by K. AVRACHENKOV & J. ZERUBIA)

Joint work with Nahuel SOPRANO-LOTO (Inria Paris)

and Konstantin AVRACHENKOV (Inria Sophia Antipolis)

Inria Sophia Antipolis, Lagrange Gris room (L101) – 2.30 p.m. Thursday 16 July 2026



Outline

1. Motivation & the Bayesian framework
2. The Sankararaman & Baccelli model
3. MCMC Dynamics & Performance Bounds
4. Open Questions & Conclusion

01

Motivation & the Bayesian framework



Haplotype Assembly

1. Biological Setup: Two Homologous Chromosomes (Haplotypes)

Humans are diploid: they have two copies of each chromosome (homologous chromosomes).

Haplotype 1
(Truth $\Sigma = +$)


Haplotype 2
(Truth $\Sigma = -$)



Haplotype Assembly

2. High-Throughput Sequencing: DNA Reads

Sequencing generates short, overlapping fragments called **reads** from both chromosomes.

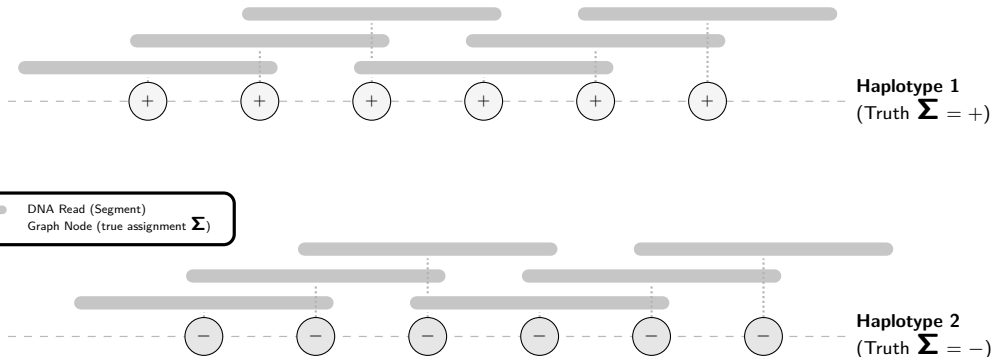




Haplotype Assembly

3. Modeling as a Signed Graph

Nodes = reads Edges = overlaps

Goal: Reconstruct the true haplotype assignments Σ from this observed signed graph.

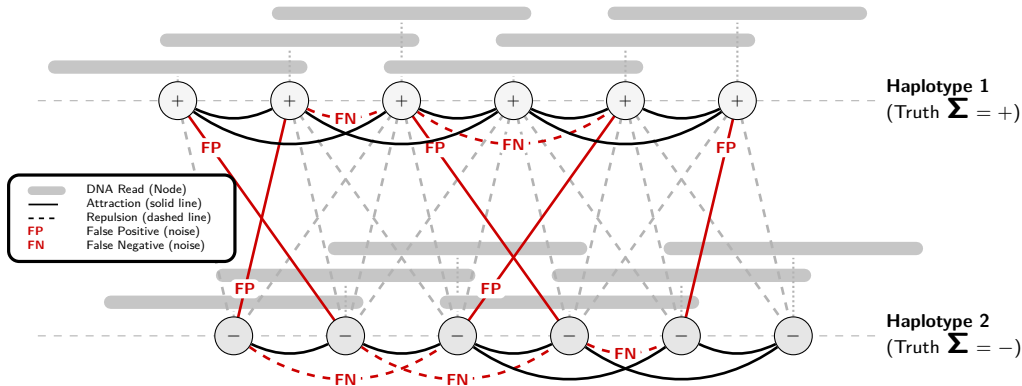



Motivation: Signed Community Detection

Community Detection on Signed Graphs ($K = 2$)

- ▶ Partition nodes into $K = 2$ communities: $\Sigma_i \in \{+1, -1\}$.
- ▶ Links represent **attractions** (solid) and **repulsions** (dashed).
- ▶ Beyond the classical SBM: a rich framework coupling spatial geometry and community structure!

The Geometric Challenge

- ▶ Spatial embedding (e.g., positions on $\mathbb{Z}$ or $\mathbb{R}^d$).
- ▶ Edge probabilities depend on distance $r = \|x_i - x_j\|$:

$$\mathbb{P}(\text{attractive edge} \mid \text{same community}) = f_{\text{in}}(r)$$

$$\mathbb{P}(\text{attractive edge} \mid \text{different communities}) = f_{\text{out}}(r)$$

- ▶ **Main interest of the model... but also core challenge:** capturing this geometry.




The General Bayesian Model

Definition

1. **Nodes, Edges, Communities:** Nodes $V_n = \{1, \dots, n\}$, edges E_n , communities $\mathcal{L}_K = \{0, \dots, K-1\}$, and set of configurations $\sigma \in \mathcal{C}_n = (\mathcal{L}_K)^{V_n}$.
2. **Features:** $X_n \in \mathcal{X}_n$ according to distribution ν_n .
3. **Prior on configurations:** $\mu_{0,n}(\mathrm{d}\sigma \mid x)$ over $\mathcal{C}_n$.
4. **(Noisy) channel:** $Q_n(\mathrm{d}w \mid x, \sigma) = \prod_{e \in E_n} Q_{e,n}(\mathrm{d}w_e \mid x_i, x_j, \sigma_i, \sigma_j)$.

The joint law is $\mathbb{P}_n(\mathrm{d}x, \mathrm{d}\sigma, \mathrm{d}w) = \nu_n(\mathrm{d}x) \mu_{0,n}(\mathrm{d}\sigma \mid x) Q_n(\mathrm{d}w \mid x, \sigma)$.

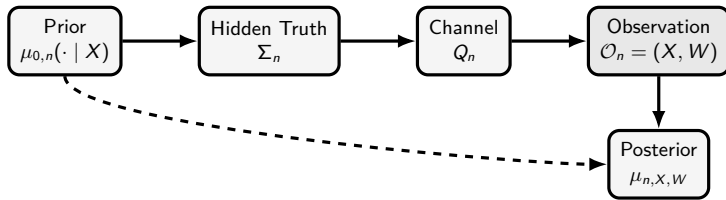





Gibbs Model on Signed Graphs

Attractive and Repulsive Edges

Partition potential edges $E = F \dot{\cup} \tilde{F}$:

- ▶ F : **Attractive** (ferromagnetic), weight $W_e > 0$
- ▶ $\tilde{F}$: **Repulsive** (antiferromagnetic), weight $W_e < 0$



Signed Gibbs Measure [1]

Configuration probability $\mu(\sigma) = \frac{1}{Z} e^{-U(\sigma)}$, where energy $U(\sigma)$ penalizes unsatisfied edges:

$$U(\sigma) = \sum_{e=\{i,j\} \in F} W_e \mathbb{I}_{\{\sigma_i \neq \sigma_j\}} + \sum_{e=\{i,j\} \in \tilde{F}} |W_e| \mathbb{I}_{\{\sigma_i = \sigma_j\}}$$

Gibbs Assumption

Special case of the Bayesian framework where the posterior is assumed to be:

$$\mu_{X,W}(\sigma) = \frac{1}{Z} e^{-U(\sigma)}$$



Advantages of the Bayesian Framework

Rigorous Definitions

- ▶ **Algorithm** τ_n : MARKOV kernel mapping observations (X, W) to configurations.
- ▶ **Random Guess**: An algorithm agnostic to observations (relying only on the prior μ_0).
- ▶ **Weak / Partial Recovery**: Beating the best random guess asymptotically.

Posterior Resampling

Replace hidden truth by replica:

$$\Sigma \iff \Sigma^{(1)} \sim \mu(\cdot \mid X, W)$$

Measure of Performance: Overlap

The overlap quotients the HAMMING similarity by label permutations $\mathfrak{S}_K$:

$$\text{ov}_n(\sigma, \sigma') = \max_{\pi \in \mathfrak{S}_K} \frac{1}{n} \sum_{i=1}^n \mathbb{I}_{\{\sigma'_i = \pi(\sigma_i)\}}$$

- ▶ Uniform prior: best random guess score is $1/K$.
- ▶ Weak recovery: $\text{overlap} \geq 1/K + \eta$.



Posterior Resampling (Nishimori Identity)

Core Idea: Replacing Truth by a Replica

Comparing τ to truth $\Sigma \iff$ Comparing τ to replica $\Sigma^{(1)} \sim \mu$

Theorem (Nishimori Identity [2])

For any algorithm τ , posterior replica $\Sigma^{(1)} \sim \mu$, and bounded test function Ψ :

$$\mathbb{E} [\Psi(X, W, \Sigma, \tau)] = \mathbb{E} [\Psi(X, W, \Sigma^{(1)}, \tau)]$$

Corollary (Overlap Identity)

$$\mathbb{P} [\text{ov}(\Sigma, \tau) \geq s] = \mathbb{P} [\text{ov}(\Sigma^{(1)}, \tau) \geq s] \quad (\forall s \in [0, 1])$$

02

The Sankararaman & Baccelli model





The Sankararaman–Bacelli Model (GSBM)

Model Definition [3]

- **Nodes:** Realization X of a homogeneous POISSON point process in an n -volume of $\mathbb{R}^d$ [4].
- **Latent Communities:** Uniform assignments $\Sigma_i \in \{+1, -1\}$ ($K = 2$).
- **Edges:** Connection $e = \{i, j\} \in H$ occurs with probability:

$$\mathbb{P}(e \in H \mid X, \Sigma) = \begin{cases} f_{\text{in}}(r_e) & \text{if } \Sigma_i = \Sigma_j \text{ (attraction),} \\ f_{\text{out}}(r_e) & \text{if } \Sigma_i \neq \Sigma_j \text{ (repulsion),} \end{cases}$$

where $r_e = \|X_i - X_j\|$ and $f_{\text{in}}(r) \geq f_{\text{out}}(r)$.

Goal: Weak Recovery

- Find an algorithm τ_n (independent of Σ_n) achieving:

$$\lim_{n \rightarrow \infty} \mathbb{E}[\text{ov}_n(\Sigma_n, \tau_n)] \geq \frac{1}{2} + \eta \quad (\eta > 0), \quad \text{where } \text{ov}_n(\Sigma_n, \tau_n) = \max_{\pi \in \mathfrak{S}_2} \frac{1}{n} \sum_{i=1}^n \mathbb{I}_{\{\tau_n, i = \pi(\Sigma_n, i)\}}.$$



GSBM in the Bayesian Framework

Sankararaman & Baccelli (GSBM)	Bayesian Framework
Positions X : Realization of a homogeneous POISSON point process Prior : Uniform prior μ_0 on $\Sigma \in \{+1, -1\}^n$ Observables : (H, X) where H is the observed graph	Features $X \sim \nu$: same POISSON law Prior μ_0 : same Observables : (W, X) where W is the channel output
Deterministic construction of W from H: $W_e = \begin{cases} \log \left(\frac{f_{\text{in}}(r_e)}{f_{\text{out}}(r_e)} \right) \geq 0 & \text{if } e \in H \text{ (attractive),} \\ -\log \left(\frac{1 - f_{\text{out}}(r_e)}{1 - f_{\text{in}}(r_e)} \right) \leq 0 & \text{if } e \notin H \text{ (repulsive).} \end{cases}$	
Posterior : $\mathbb{P}(\Sigma = \sigma \mid H, X)$	Posterior : $= \mathbb{P}(\Sigma = \sigma \mid W, X) = \mu(\sigma)$  GIBBS assumption



The Percolation Obstruction

Necessary Condition for Weak Recovery [3]

- Requires a global information flow graph to **percolate** [5] (possess a giant component).

Theorem (Sankararaman & Baccelli [3])

Independent bond percolation with edge probability

$$p_e = f_{\text{in}}(r_e) - f_{\text{out}}(r_e)$$

*yielding a giant component is a **necessary condition** for weak recovery.*

- **Our goal:** Retrieve and extend this result using unified **Bayesian MCMC coupling**.

03

MCMC Dynamics & Performance Bounds






Invariant Coupling

Markov Chain Dynamics as a Source of Coupling


- ▶ We construct the posterior replica $\Sigma^{(1)}$ starting from the hidden truth Σ .
- ▶ Running **exactly one step** of a posterior-invariant MARKOV kernel M initialized at Σ yields a valid replica $\Sigma^{(1)} \sim M(\Sigma, \cdot)$.

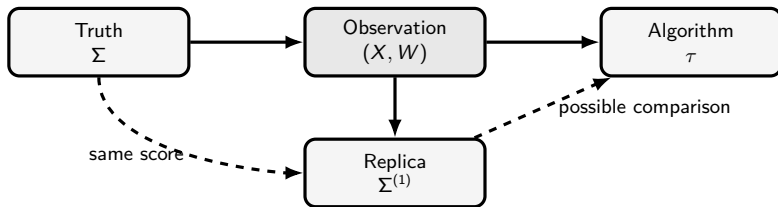

Single-Spin Dynamics & Geometric Bottleneck


Single-Spin Update Limitations

- **Geometry makes updates slow:** Single-spin dynamics (GLAUBER / METROPOLIS-HASTINGS [6]) update one node at a time.
- **Contradictory Clusters:** Two internally valid (highly satisfied) but mutually contradictory clusters are locked.
- **High Energy Barrier:** Flipping a single boundary node violates internal edges, creating a local energy barrier.
- **Conclusion:** Need for geometry $\implies$ **Cluster Dynamics** (updating whole regions).





One Step of Signed Swendsen–Wang [7, 8]

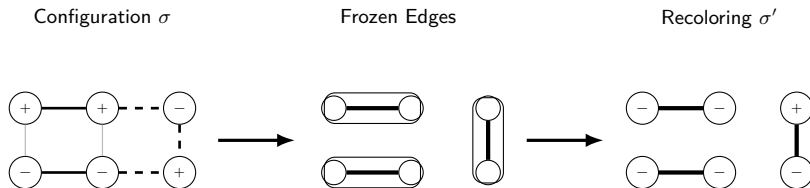

- Edges in bold represent satisfied interactions that are randomly frozen.
- Clusters are then flipped independently.



Swendsen–Wang Signed Cluster Dynamics

Swendsen–Wang (SW) Signed Cluster Dynamics [7, 8]

- ▶ Update whole clusters of vertices simultaneously to speed up mixing.
- ▶ **Freezing Step:** For each edge $e = \{i, j\}$:
 - If e is satisfied ($W_e > 0$ and $\sigma_i = \sigma_j$, or $W_e < 0$ and $\sigma_i \neq \sigma_j$), freeze it with probability:
$$p_e^{\text{frozen}} = 1 - e^{-|W_e|}.$$
 - If e is unsatisfied, do not freeze it ($p_e^{\text{frozen}} = 0$).
- ▶ **Recoloring Step:** Flip each frozen cluster independently with probability $1/2$.



High-Order Triangular Dynamics

The Frustration Obstruction

- ▶ **Frustration:** $\nexists \sigma$ satisfying all edges (conflicting constraints).
- ▶ **Excessive Freezing:** In frustrated configurations, standard SW satisfies and freezes too many edges independently, blocking/freezing the MCMC dynamics.
- ▶ **Higher-Order Correlation:** Group interactions into **triangles** to correlate freezing and **freeze** as little as possible.

Triangular Cluster Dynamics [9]

- ▶ **Energy Decomposition:** Distribute edge energy U over triangles: $U(\sigma) = \sum_{t \in \mathcal{T}} U_t(\sigma)$.
- ▶ **Freezing Mechanism:** Apply a joint freezing mechanism on the triangles (rather than independent edges) to keep cluster sizes active.



Triangular Dynamics Freezing Rules

$\triangle$ Attractive Triangle (Isotropic)					
Configuration	$\emptyset$	$\{ab\}$	$\{ac\}$	$\{bc\}$	$\{ab, ac, bc\}$
$(+, +, +)$	b_u	0	0	0	a_u
Other	1	0	0	0	0

$\triangleleft \triangle$ Repulsive Triangle (Isotropic)					
Configuration	$\emptyset$	$\{ab\}$	$\{ac\}$	$\{bc\}$	$\{ab, ac, bc\}$
$(+, +, +)$	1	0	0	0	0
$(+, +, -)$	b_u	0	$a_u/2$	$a_u/2$	0
$(+, -, +)$	b_u	$a_u/2$	0	$a_u/2$	0
$(+, -, -)$	b_u	$a_u/2$	$a_u/2$	0	0

Table: Freezing rules for triangular dynamics ($a_u = 1 - e^{-2u}$, $b_u = e^{-2u}$), where u is the energy transferred by each edge.






General Swendsen–Wang Cluster Dynamics: Framework

General Framework [10]

Suppose the Hamiltonian decomposes as: $U(\sigma) = U_0(\sigma) + \sum_{b \in \mathcal{B}} U_b(\sigma)$, where each $b \in \mathcal{B}$ is a **bond** (e.g., edge, triangle, clique).

1. **Freezing Step:** For each bond $b \in \mathcal{B}$, freeze a sub-bond $\omega_b \subseteq b$ with probability $P_b^\sigma(\omega_b)$.
2. **Recoloring Step:** Recolor each frozen cluster independently according to a distribution preserving the prior $\mu_0(\sigma) \propto e^{-U_0(\sigma)}$.





General Swendsen–Wang Cluster Dynamics: Invariance

Definition (Local Reversibility)

For two configurations σ, σ' and a bond b , we define the compatibility probability:

$$P_b^{\sigma \rightarrow \sigma'}(\omega_b) = \begin{cases} P_b^\sigma(\omega_b), & \text{if } P_b^{\sigma'}(\omega_b) > 0, \\ 0, & \text{otherwise.} \end{cases}$$

The freezing rule is **locally reversible** if for all $b, \omega_b, \sigma, \sigma'$:

$$P_b^{\sigma \rightarrow \sigma'}(\omega_b) = e^{-(U_b(\sigma') - U_b(\sigma))} P_b^{\sigma' \rightarrow \sigma}(\omega_b)$$

Theorem (Gibbs Invariance [10])

If freezing choices are independent, locally reversible, and $P_b^\sigma(\emptyset) > 0$ for all b, σ :

1. The global cluster dynamics is reversible with respect to $\mu(\sigma) \propto e^{-U(\sigma)}$.
2. The condition $P_b^\sigma(\emptyset) > 0$ ensures the **irreducibility** of the MARKOV chain.

Percolation as a Necessary Condition for Recovery

Theorem (Percolation Bound on Overlap [10])

Under the uniform prior μ_0 , if frozen clusters are recolored independently and uniformly, then for the one-step posterior replica $\Sigma_n^{(1)}$, any algorithm τ_n , and any $\eta > 0$:

$$\lim_{n \rightarrow \infty} \mathbb{P} \left[\text{ov}_n(\Sigma_n^{(1)}, \tau_n) \geq \frac{1}{K} + \frac{K-1}{K}(\theta^{\max} + \eta) \right] = 0$$

where $\theta^{\max}$ is the asymptotic fraction of nodes in giant frozen components (which bounds the maximum recoverable fraction of communities).

Corollary (Percolation is Necessary)

*If there is no percolation ($\theta^{\max} = 0$), the maximum overlap is bounded by $1/K$ (random guess): weak recovery is impossible. Hence, **percolation is a necessary condition for weak recovery**.*

Key Intuition

Small clusters are recolored independently, washing out their contribution. Only giant (macroscopic) components can carry global community information.

Coupling & the Sankararaman–Baccelli Bound

One Step of Classical Edge-by-Edge Swendsen–Wang

Let's run one step of standard SWENDSEN–WANG (edges) initialized at the hidden truth Σ . For any edge e , the probability that it is frozen is:

► **Case 1** ($\Sigma_i = \Sigma_j$):

$$\mathbb{P}(\text{frozen}) = f_{\text{in}}(r_e) \left(1 - e^{-|W_e|}\right) = f_{\text{in}}(r_e) \left(1 - \frac{f_{\text{out}}(r_e)}{f_{\text{in}}(r_e)}\right) = f_{\text{in}}(r_e) - f_{\text{out}}(r_e)$$

► **Case 2** ($\Sigma_i \neq \Sigma_j$):

$$\mathbb{P}(\text{frozen}) = (1 - f_{\text{out}}(r_e)) \left(1 - e^{-|W_e|}\right) = (1 - f_{\text{out}}(r_e)) \left(1 - \frac{1 - f_{\text{in}}(r_e)}{1 - f_{\text{out}}(r_e)}\right) = f_{\text{in}}(r_e) - f_{\text{out}}(r_e)$$

Corollary (Retrieving the S&B Bound [3])

*Under the classical edge SW dynamics, the frozen graph is **exactly** an independent bond percolation with edge probability:*

$$p_e = f_{\text{in}}(r_e) - f_{\text{out}}(r_e).$$



Strict Improvement of the S&B bound (on the triangular grid)

Homogeneous Model ($f_{\text{in}} = p$, $f_{\text{out}} = 1 - p$)

On the triangular grid, we select a family of independent white triangles (like a chessboard).

- **Edge Dynamics (Standard SW):** Frozen graph is independent edge percolation with parameter $p_{\text{edge}} = 2p - 1$. Critical threshold:

$$p_c^{\text{edge}} = \frac{1}{2} + \sin\left(\frac{\pi}{18}\right) \approx 0.673 \dots$$

- **Triangular Dynamics:** Frozen graph yields correlated triangle percolation. Critical threshold:


$$p_c^{\triangle} = \frac{7}{4} - \frac{\sqrt{17}}{4} \approx 0.7192 \dots$$

Corollary (Strictly Better Impossibility Bound [10])

Since $p_c^{\text{edge}} < p_c^{\triangle}$, for any $p \in [0.673 \dots, 0.7192 \dots)$, the standard S&B bound cannot conclude (edge dynamics percolate), whereas triangular dynamics do not, proving that weak recovery is impossible.



Empirical Results: Subcritical vs. Supercritical ($p = 0.70$)

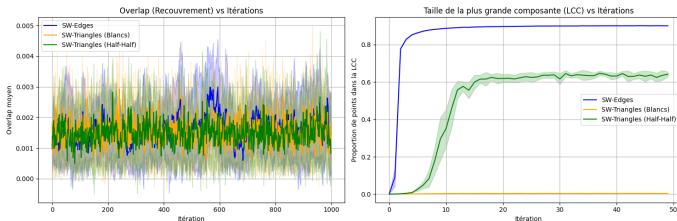

Phase Space


$(p_c^{\text{edge}} \approx 0.673 < 0.70 < p_c^{\Delta} \approx 0.7192)$

- ▶ **Edges (standard SW):** supercritical ($\theta^{\max} > 0$), largest component size (LCC) reaches ≈ 0.9 (right plot).
- ▶ **Triangles / Split weight:** subcritical ($\theta^{\max} = 0$), LCC remains near 0.

Observed Behavior

- ▶ Only standard edge SW achieves giant components.
- ▶ Overlap remains at the baseline noise level (around 0.002) for triangles and split weights due to lack of percolation (left plot).

Empirical Results: Onset of Percolation ($p = 0.72$)

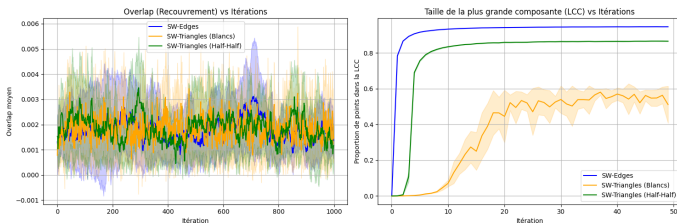

Transition Regime

($p = 0.72 > p_c^\Delta \approx 0.7192$)


- ▶ All three dynamics are now **supercritical**.
- ▶ LCC grows for all: edges reach ≈ 0.9 , split weights reach ≈ 0.85 , and white triangles reach ≈ 0.55 (right plot).

Observed Behavior

- ▶ Giant components have formed, but the overlap remains low (below 0.003) for all dynamics (left plot).
- ▶ **No weak recovery yet:** the true weak recovery threshold is likely strictly above the percolation threshold (percolation is only a necessary condition).



Empirical Results: Weak Recovery Achieved ($p = 0.80$)

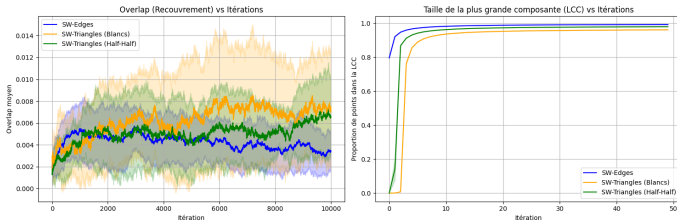

Supercritical Regime ($p = 0.80 \gg p_c^\Delta$)

- ▶ Giant components are well-established (right plot), with LCC close to 0.95 for edges and split weights, and 0.90 for white triangles.
- ▶ Fluctuations are small and components are stable.

Observed Behavior

- ▶ Weak recovery is successfully achieved for all algorithms.
- ▶ The overlap climbs significantly above the noise level (left plot), peaking at ≈ 0.010 for white triangles and ≈ 0.006 for split weights.



A Hierarchy as an Auxiliary Variable

Start from any joint lift


$$\nu(\sigma, dD), \quad \int \nu(\sigma, dD) = \mu(\sigma),$$

where D is a dendrogram of nested vertex sets.

One transition:


1. refresh $D \sim \nu(\cdot \mid \sigma)$;
2. sweep the clusters $A \in D$, from fine to coarse scales;
3. discard D .

Fresh auxiliary randomness makes (σ_n) a Markov chain.

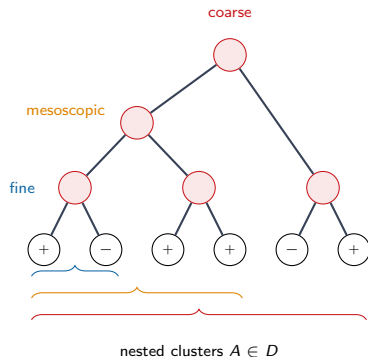



Heat-Bath Flips at Every Scale

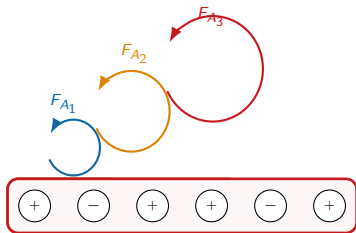

Write $\nu_D(\sigma) = \nu(\sigma \mid D)$ and let F_A flip every spin in A . At cluster A use

$$p_A^D(\sigma) = \frac{\nu_D(F_A \sigma)}{\nu_D(\sigma) + \nu_D(F_A \sigma)}.$$

Hence

$$\sigma \mapsto \begin{cases} F_A \sigma, & \text{with probability } p_A^D(\sigma), \\ \sigma, & \text{otherwise.} \end{cases}$$

Local, mesoscopic and macroscopic clusters are all proposed; the conditional Gibbs weight decides each flip.

Why the Hierarchical Dynamics Preserves Gibbs

For the one-cluster kernel H_A^D ,

$$\nu_D(\sigma)H_A^D(\sigma, F_A\sigma) = \frac{\nu_D(\sigma)\nu_D(F_A\sigma)}{\nu_D(\sigma) + \nu_D(F_A\sigma)} = \nu_D(F_A\sigma)H_A^D(F_A\sigma, \sigma).$$

Thus every H_A^D is ν_D -reversible. Any full sweep Q_D is ν_D -stationary; a random scan or a palindromic sweep is also reversible.

After refreshing D , the spin kernel is

$$K(\sigma, \sigma') = \int \nu(dD \mid \sigma) Q_D(\sigma, \sigma').$$

Therefore

$$\sum_{\sigma} \mu(\sigma) K(\sigma, \sigma') = \int \nu(dD) \sum_{\sigma} \nu_D(\sigma) Q_D(\sigma, \sigma') = \int \nu(dD) \nu_D(\sigma') = \mu(\sigma').$$

Conclusion

The spin chain is Markov and Gibbs-stationary. If Q_D is reversible, the same computation with (σ, σ') proves detailed balance for K .

A Canonical Lift: Censored Edwards–Sokal Clocks

Set $J_e = |W_e|$, $\eta_e = \text{sgn}(W_e)$ and

$$U(\sigma) = \sum_{e=\{i,j\}} J_e \mathbb{I}_{\{\sigma_i \sigma_j \neq \eta_e\}}, \quad \mu(\sigma) = Z^{-1} e^{-U(\sigma)}.$$

For independent $X_e \sim \text{Exp}(J_e)$, retain $T_e = X_e$ only when $\sigma_i \sigma_j = \eta_e$ and $X_e \leq 1$; otherwise set $T_e = \infty$. Equivalently,

$$\bar{\mu}(\sigma, dT) = \frac{1}{Z} \prod_{e \in E} \left[e^{-J_e} \delta_\infty(dT_e) + \mathbb{I}_{\{\sigma_i \sigma_j = \eta_e\}} J_e e^{-J_e T_e} \mathbb{I}_{\{0 \leq T_e \leq 1\}} dT_e \right].$$


Each factor integrates to

$$\begin{cases} e^{-J_e} + \int_0^1 J_e e^{-J_e t} dt = 1, & \sigma_i \sigma_j = \eta_e, \\ e^{-J_e}, & \sigma_i \sigma_j \neq \eta_e, \end{cases}$$

so $\bar{\mu}(\sigma) = \mu(\sigma)$. Moreover, with $A(T) = \{e : T_e < \infty\}$,

$$\bar{\mu}(\sigma \mid T) = 2^{-c(A)} \mathbb{I}_{\{\sigma \in \Omega_A\}}, \quad \Omega_A = \{\tau : \tau_i \tau_j = \eta_e \ \forall e \in A\}.$$

The Exact MSF Specialization Collapses to SW



Every active edge is satisfied by the current spin configuration; active signed components are balanced. Kruskal preserves connectivity and all signed parities:

$$\mathcal{C}(F(T)) = \mathcal{C}(A(T)), \quad \Omega_{F(T)} = \Omega_{A(T)}.$$

Hence exact conditional recoloring is one fair bit per final component. Proper subtree flips are forbidden or redundant.

$$K_{\text{ES-MSF}} = K_{\text{SW}}.$$



Consequences for Weak Recovery

What is rigorous

The heat-bath dendrogram sweep is Gibbs-stationary. For the censored edge lift, however, its exact MSF specialization has exactly the SW component law. On the homogeneous triangular GSBM, in the truth coupling,

$$\mathbb{P}(e \text{ active}) = 2p - 1,$$

$$p_c^{\text{ES-MSF}} = p_c^{\text{SW}} = \frac{1}{2} + \sin\left(\frac{\pi}{18}\right) \simeq 0.67365.$$

What a strict improvement requires

To beat the triangle certificate

$$p_c^{\triangle} = \frac{7 - \sqrt{17}}{4} \simeq 0.71922,$$

one needs a genuinely new positive macro-block lift $\nu(\sigma, D)$ (so proper subtree flips have non-zero conditional weight), together with a new boundary-connectivity/percolation proof.

Hierarchy alone is not a new threshold.

04

Open Questions & Conclusion





Open Questions

Limits of the One-Replica Coupling

- ▶ Our framework constructs **one** replica $\Sigma_n^{(1)}$ using MCMC cluster dynamics.
- ▶ This only yields an impossibility bound (**necessary condition** for recovery).

Towards a Necessary and Sufficient Condition

- ▶ Achieving a **necessary and sufficient** condition requires a **two-replica** framework.
- ▶ Open: How to define and analyze two-replica couplings under MCMC?

Towards a Practical Community Detection Algorithm

Limits of Direct Gibbs Sampling

- ▶ Direct posterior sampling does not perform well in practice.
- ▶ Likely due to slow mixing of the underlying MARKOV chain.

Estimating the Correlation Matrix

- ▶ Estimating the correlation matrix $\mathbb{P}(\sigma_i = \sigma_j)$ yields much better results.
- ▶ **Future work:** Understand why correlation estimators are more robust.



Distance Adapted to Cluster Dynamics

Hamming Similarity on the Quotient Space

- ▶ Standard overlap is a **HAMMING** similarity quotiented by label permutations:

$$\text{ov}_n(\sigma, \sigma') = \max_{\pi \in \mathfrak{S}_K} \frac{1}{n} \sum_{i=1}^n \mathbb{I}_{\{\sigma'_i = \pi(\sigma_i)\}}.$$

Markov Transition-Adapted Distance

- ▶ Consider distances reflecting transitions of the cluster dynamics.
- ▶ For standard SW, this corresponds to the **symmetric difference** on satisfied edges:

$$d_{\text{sym}}(\sigma, \sigma') = \frac{1}{2} \sum_{e=\{i,j\}} |W_e| \left| \mathbb{I}_{\{\sigma \text{ satisfies } e\}} - \mathbb{I}_{\{\sigma' \text{ satisfies } e\}} \right|$$

- ▶ Establishes links to **spectral graph analysis** (e.g., **LAPLACIAN** eigenvalues).

Application: 3-SAT Solving via Signed Graphs

The 3-SAT Problem


Find a truth assignment satisfying a set of clauses, e.g.,

$$\mathcal{C} = x_i \vee \neg x_j \vee x_k$$

Clause Encoding

We introduce a reference node **T** (True):

- ▶ **Triangle** (literals $x_i, \neg x_j, x_k$): edge signs opposite to the literal product.
- ▶ **Tetrahedron (with T)**: edge signs conforming to the literal signs.

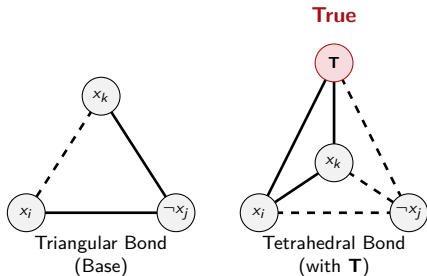



Bibliography I

- [1] Jörg Reichardt and Stefan Bornholdt. "Statistical mechanics of community detection". In: *Phys. Rev. E* 74 (1 July 2006), p. 016110. DOI: [10.1103/PhysRevE.74.016110](https://doi.org/10.1103/PhysRevE.74.016110).
- [2] Hidetoshi Nishimori. "Exact results and critical properties of the Ising model with competing interactions". In: *Journal of Physics C: Solid State Physics* 13.21 (1980), pp. 4071–4076. DOI: [10.1088/0022-3719/13/21/012](https://doi.org/10.1088/0022-3719/13/21/012).
- [3] Abishek Sankararaman and François Baccelli. "Community Detection on Euclidean Random Graphs". In: *Proceedings of the Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)* (2018), pp. 2181–2200. DOI: [10.1137/1.9781611975031.142](https://doi.org/10.1137/1.9781611975031.142).
- [4] François Baccelli and Bartomiej Baszczyszyn. *Stochastic Geometry and Wireless Networks, Volume I - Theory*. Vol. 1. Foundations and Trends in Networking. NoW Publishers, 2009, p. 150. DOI: [10.1561/13000000006](https://doi.org/10.1561/13000000006).
- [5] Mathew Penrose. *Random Geometric Graphs*. Vol. 5. Oxford Studies in Probability. Oxford University Press, 2003. DOI: [10.1093/acprof:oso/9780198506263.001.0001](https://doi.org/10.1093/acprof:oso/9780198506263.001.0001).
- [6] Persi Diaconis. "The Markov chain Monte Carlo revolution". In: *Bulletin of the American Mathematical Society* 46.2 (2009), pp. 179–205. DOI: [10.1090/S0273-0979-08-01238-X](https://doi.org/10.1090/S0273-0979-08-01238-X).

Bibliography II

- [7] Robert H. Swendsen and Jian-Sheng Wang. “Nonuniversal critical dynamics in Monte Carlo simulations”. In: *Phys. Rev. Lett.* 58 (2 Jan. 1987), pp. 86–88. DOI: [10.1103/PhysRevLett.58.86](https://doi.org/10.1103/PhysRevLett.58.86).
- [8] Robert G. Edwards and Alan D. Sokal. “Generalization of the Fortuin-Kasteleyn-Swendsen-Wang representation and Monte Carlo algorithm”. In: *Phys. Rev. D* 38 (6 Sept. 1988), pp. 2009–2012. DOI: [10.1103/PhysRevD.38.2009](https://doi.org/10.1103/PhysRevD.38.2009).
- [9] Louis Hauseux, Nahuel Soprano-Loto, and Konstantin Avrachenkov. “Higher-order Monte Carlo cluster dynamics for community detection in Euclidean graphs”. In: *Asilomar Conference on Signals, Systems, and Computers 2025*. Pacific Grove (CA), United States, Oct. 2025. URL: <https://inria.hal.science/hal-05267074>.
- [10] Louis Hauseux, Nahuel Soprano-Loto, and Konstantin Avrachenkov. *A Bayesian Framework for Community Detection on Signed Graphs. Tighter Bounds with Higher-Order Interaction Markov Chain Monte Carlo Cluster Dynamics*. Article en cours de rédaction. 2026+.

Merci.

