1U NUT BLOCK PROPOSAL FOR APPROVAL

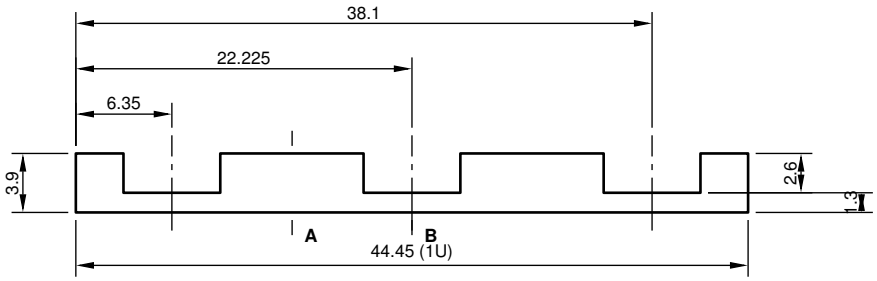

FRONT VIEW 2:1

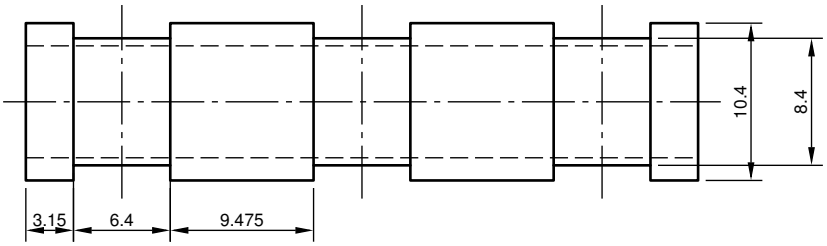

TOP VIEW 2:1

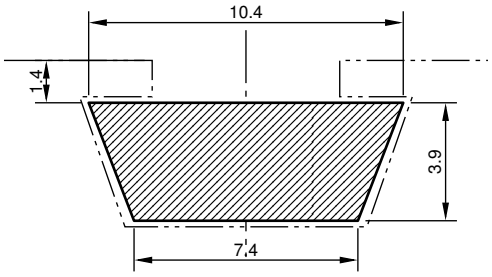

SECTION A-A 4:1

between two nuts

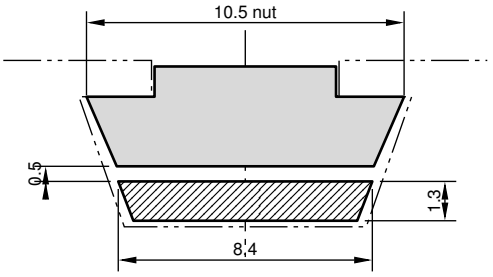

SECTION B-B 4:1

through a nut

STACK IN THE FRONT SLOT 1.5:1

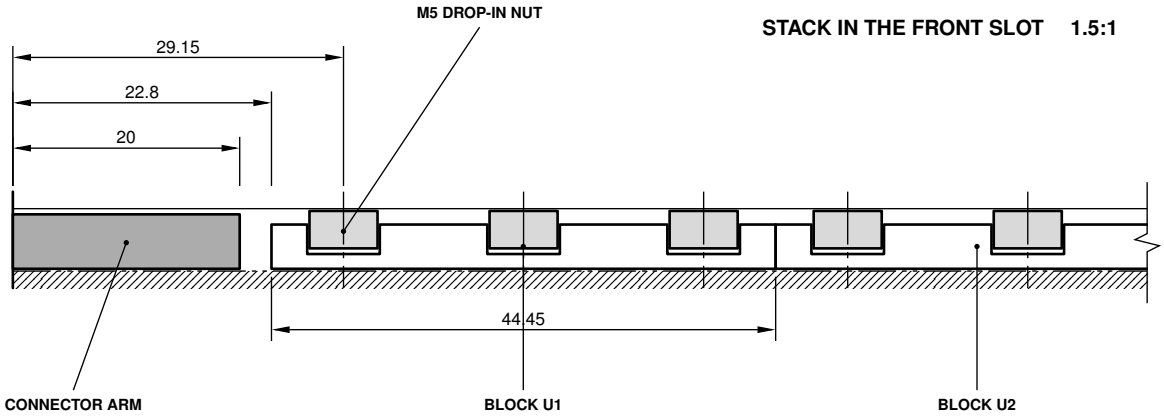

NOTES

1. All dimensions in mm. Proposal for approval: not modeled yet.
2. 12 identical blocks per front upright, 24 in all, slid in from the upright end before the corner connector goes on. Print floor down, pockets up, no supports.
3. Holds the M5 drop-in nut 10.5 × 6 × 3.3 (neck 6 × 6 × 1), turned across the slot: its 6 mm side runs along the slot, in a 6.4 pocket.
4. Profile cavity assumed 11 wide under the 1.2 lips and 5.5 deep from the face to the core, 0.2 to 0.3 clear on every side: to be confirmed with a test print.
5. The connector arm takes the first 20 mm of the slot. The stack rests on the lower arm, so the U grid sits 2.8 lower than on sheet 02; the pitch is unchanged.

OWNER

LUIDLAB · MINIRACK PROJECT · 8 U. · 20 × 20 ALUMINUM EXTRUSION

TITLE	PROJECTION	UNIT
1U NUT BLOCK Printed spacer for the M5 drop-in nuts in the front slot, proposal		**mm**
MATERIAL	STANDARDS	
PETG, 3D printed, 100 % infill	ISO 5457 · 7200 · 128 · 129-1	

DRAWING NO.	SCALE	SHEET	DATE	REV.
MR2020-06	**2:1, 4:1**	**1 / 1**	2026-10-29	**A**