


src/main/java/com/example
/gruppo04/model/TrackImpl.java

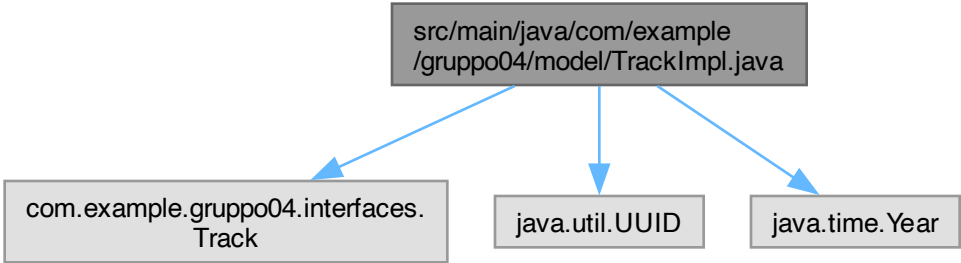

```
graph TD; A["src/main/java/com/example /gruppo04/model/TrackImpl.java"] --> B["com.example.gruppo04.interfaces.Track"]; A --> C["java.util.UUID"]; A --> D["java.time.Year"];
```

The diagram illustrates the imports used in the file `src/main/java/com/example /gruppo04/model/TrackImpl.java`. Three blue arrows point from the top box to three separate boxes below, representing the imported classes: `com.example.gruppo04.interfaces.Track`, `java.util.UUID`, and `java.time.Year`.

com.example.gruppo04.interfaces.
Track

java.util.UUID

java.time.Year