FIAP – FACULDADE DE INFORMÁTICA E ADMINISTRAÇÃO PAULISTA

BRUNO BIANCCHI – RM 84351

DOUGLAS ANDRADE SANTOS FILHO – 87004

LUIS HENRIQUE CALDAS ALTERO – RM 88670

PEDRO GUILHERME POLLONI BARRETO - RM 88964

VICTOR LAMPRECHT – RM 86691

Global Solution – Database Engineering Systems
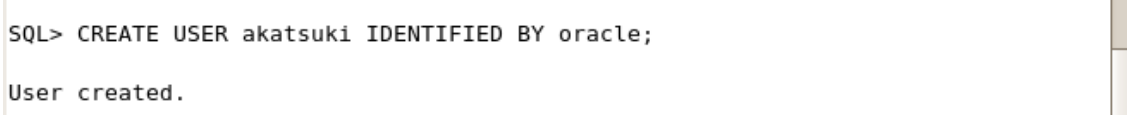
São Paulo

2021

Evidências da execução dos comandos

1 – Conexão com o Usuário SYS que possui privilégios de administrador do Banco de Dados.

```
oracle@localhost:~
Ficheiro  Editar  Ver  Consola  Separadores  Ajuda
[oracle@localhost ~]$ sqlplus sys/oracle as sysdba

SQL*Plus: Release 11.2.0.2.0 Production on Thu Jun 3 06:00:26 2021

Copyright (c) 1982, 2010, Oracle.  All rights reserved.


Connected to:
Oracle Database 11g Enterprise Edition Release 11.2.0.2.0 - Production
With the Partitioning, OLAP, Data Mining and Real Application Testing options
```

2 – Criação do USER akatsuki e SENHA oracle.

```
SQL> CREATE USER akatsuki IDENTIFIED BY oracle;

User created.
```

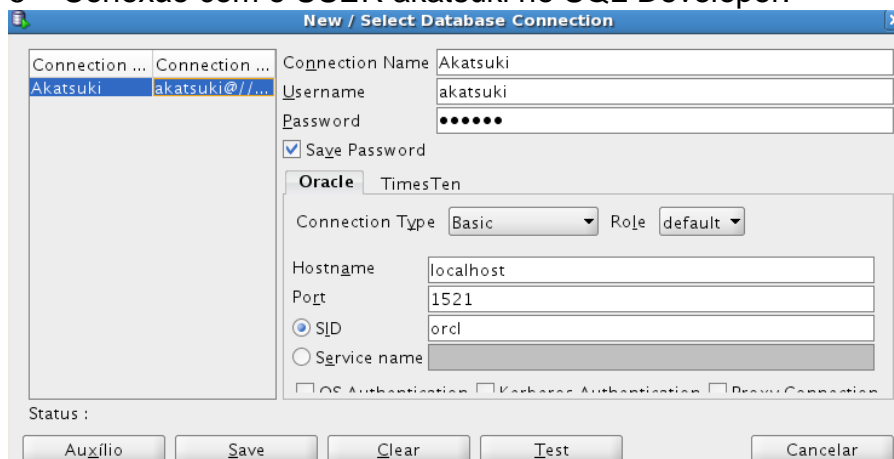3 – Permissão de privilégio de DBA ao USER akatsuki.

```
SQL> GRANT DBA TO akatsuki;

Grant succeeded.
```

4 – Conexão com o USER akatsuki.

```
SQL> CONN AKATSUKI/oracle;
Connected.
```

5 – Conexão com o USER akatsuki no SQL Developer.

```
New / Select Database Connection
Connection ...  Connection ...      Connection Name  Akatsuki
Akatsuki        akatsuki@//...      Username         akatsuki
                                    Password         ••••••
                                    ☑ Save Password
                                    Oracle   TimesTen
                                    Connection Type  Basic    ▼   Role  default ▼
                                    Hostname   localhost
                                    Port       1521
                                    ⦿ SID      orcl
                                    ○ Service name
                                    ☐ OS Authentication ☐ Kerberos Authentication ☐ Proxy Connection
Status :
   Auxílio        Save        Clear        Test                    Cancelar
```

6 – Execução do script DDL gerado a partir do Data Modeler.
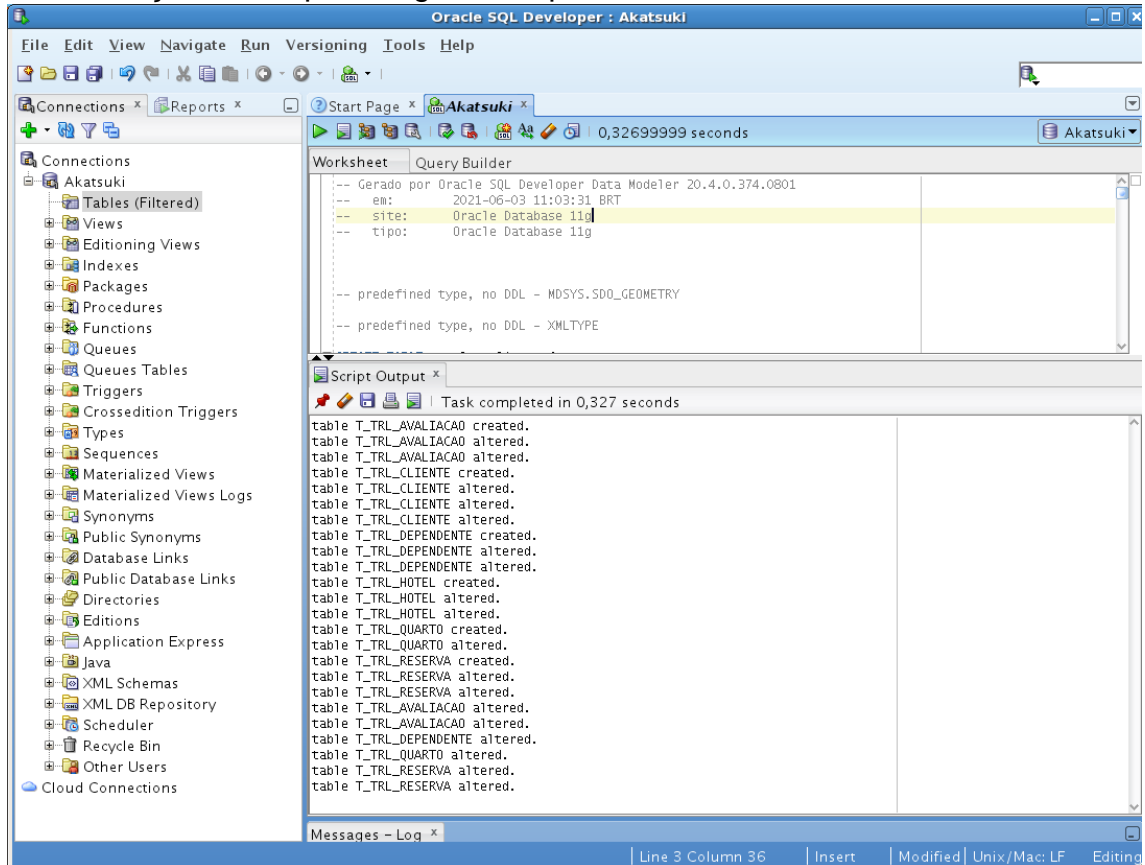
7 – Execução das consultas SELECT

```
SQL> SELECT object_name,
object_type, created FROM user_objects;  2

OBJECT_NAME
--------------------------------------------------------------------------------
OBJECT_TYPE         CREATED
------------------- ---------
T_TRL_AVALIACAO
TABLE               03-JUN-21

PK_TRL_AVALIACAO
INDEX               03-JUN-21

T_TRL_CLIENTE
TABLE               03-JUN-21
```

```
OBJECT_NAME
--------------------------------------------------------------------------------
OBJECT_TYPE         CREATED
------------------- ---------
PK_TRL_CLIENTE
INDEX               03-JUN-21

UN_TRL_CLIENTE_CPF
INDEX               03-JUN-21

UN_TRL_CLIENTE_RG
INDEX               03-JUN-21


OBJECT_NAME
--------------------------------------------------------------------------------
OBJECT_TYPE         CREATED
------------------- ---------
T_TRL_DEPENDENTE
TABLE               03-JUN-21

PK_TRL_DEPENDENTE
INDEX               03-JUN-21

T_TRL_HOTEL
TABLE               03-JUN-21


OBJECT_NAME
--------------------------------------------------------------------------------
OBJECT_TYPE         CREATED
------------------- ---------
PK_TRL_HOTEL
INDEX               03-JUN-21

T_TRL_QUARTO
TABLE               03-JUN-21

PK_TRL_QUARTO
INDEX               03-JUN-21


OBJECT_NAME
--------------------------------------------------------------------------------
OBJECT_TYPE         CREATED
------------------- ---------
T_TRL_RESERVA
TABLE               03-JUN-21

PK_TRL_RESERVA
INDEX               03-JUN-21


14 rows selected.

SQL> SELECT owner, Table_name FROM all_tables where owner = 'AKATSUKI';

OWNER                          TABLE_NAME
------------------------------ ------------------------------
AKATSUKI                       T_TRL_RESERVA
AKATSUKI                       T_TRL_QUARTO
AKATSUKI                       T_TRL_HOTEL
AKATSUKI                       T_TRL_DEPENDENTE
AKATSUKI                       T_TRL_CLIENTE
AKATSUKI                       T_TRL_AVALIACAO

6 rows selected.
```