
When Do Quantum Kernels Help?

An Empirical and Diagnostic Study of the ZZ Feature Map

Anonymous Author(s)

Affiliation

Address

email

Abstract

1 Quantum kernel methods promise richer feature spaces than classical kernels by
2 encoding data into the exponentially large Hilbert space of a quantum circuit,
3 but it is unclear how often this promise translates into an actual advantage on
4 realistic data. We build a from-scratch, exactly-simulated implementation of the
5 Havlíček et al. (2019) ZZ feature-map fidelity kernel – without any quantum
6 computing library – validate it against an independent brute-force construction,
7 and use it to run a controlled comparison against classical (RBF, polynomial,
8 linear) kernels under an identical model-selection protocol. On a synthetic dataset
9 engineered so its labels are a function of the same feature map (a positive control),
10 the quantum kernel reaches 98.3% test accuracy versus 48–53% (chance level) for
11 every classical kernel. On the MiniBooNE particle-identification benchmark – a
12 real high-energy-physics classification task (Fermilab electron-neutrino vs. muon-
13 neutrino events) with no engineered relationship to any quantum feature map –
14 the result reverses sharply: classical kernels reach 81–87% accuracy while the
15 quantum kernel collapses to 71.7% at both PCA dimensionalities we test, exactly
16 the majority-class baseline in both cases. We diagnose this gap using kernel-target
17 alignment and kernel-value statistics, and connect it to existing theory on the
18 inductive bias and concentration of quantum kernels. Our results are an honest
19 negative result for quantum kernels as a drop-in replacement for classical kernels
20 on generic data, and a clean positive control demonstrating our simulator and
21 evaluation protocol are correct and can detect an advantage when one is present by
22 construction.

23 1 Introduction

24 Quantum kernel methods encode a classical data point x into a quantum state $|\phi(x)\rangle$ via a pa-
25 rameterized circuit (a *feature map*), and define a kernel as an inner product between such states,
26 $k(x, x') = |\langle\phi(x)|\phi(x')\rangle|^2$. Because $|\phi(x)\rangle$ lives in a Hilbert space of dimension 2^n for n qubits, this
27 is often motivated as implicitly using an exponentially large feature space that would be classically
28 intractable to represent explicitly [Rebentrost et al., 2014, Schuld and Killoran, 2019, Havlíček et al.,
29 2019]. This is the same kernel-trick argument used to motivate the RBF kernel, and it raises an
30 obvious empirical question: for a fixed, modest number of qubits, does a quantum kernel actually
31 classify real data any better than a well-tuned classical kernel with the same number of input features?

32 The honest answer, as several theoretical results have begun to suggest [Kübler et al., 2021, Huang
33 et al., 2021, Thanasilp et al., 2024], is usually no – unless the data has structure specifically aligned
34 with the feature map. We investigate this question directly and empirically. Rather than relying on a
35 quantum SDK (which can obscure what the kernel is actually computing behind a compiled circuit

and a stochastic shot-based estimate), we implement an *exact*, from-scratch classical simulation of the Havlíček et al. ZZ feature map kernel using only NumPy, and validate it bit-for-bit against an independent brute-force dense-matrix implementation. We then run the same model-selection and evaluation protocol for the quantum kernel and three classical kernels (RBF, polynomial, linear) on: (1) a synthetic dataset explicitly engineered, following Havlíček et al. [2019], so that its ground-truth labels are a function of the same feature map – a positive control that should favor the quantum kernel; and (2) the MiniBooNE particle identification dataset [Roe, 2010], a real high-energy-physics benchmark distinguishing electron-neutrino signal events from muon-neutrino background events at the MiniBooNE experiment, with no engineered relationship to any quantum feature map – a task a practitioner might realistically want to classify.

Contributions.

- An exact, dependency-free NumPy simulator of the ZZ feature-map fidelity kernel, using a batched Walsh–Hadamard transform and a vectorized diagonal-phase update, validated against an independent brute-force dense-matrix construction (Section 3).
- A reproduction of the Havlíček-style engineered “quantum-advantage” dataset construction, together with a fully worked-out, checkable derivation of its labeling rule (Section 3.5).
- A controlled empirical comparison, under one shared model-selection protocol and a common kernel normalization, of the quantum kernel against classical kernels on both the engineered positive control and a real high-energy-physics benchmark, MiniBooNE (Sections 4–5).
- A diagnosis of *why* the quantum kernel fails on real data using kernel-target alignment [Cristianini et al., 2001] and raw kernel-value statistics, connected to the inductive-bias and concentration-of-measure literature (Section 6).

We are explicit about what this study does *not* claim: because exact classical simulation costs $O(2^n)$ per sample, we can only evaluate small qubit counts ($n \leq 6$), so nothing here bears on whether a real quantum device would offer a *computational* (runtime) advantage. Our claim is narrower and purely statistical: for the ZZ feature map at accessible qubit counts, whether the resulting kernel is a good inductive bias for a classification task depends entirely on whether the task’s structure matches the feature map – it is not a general-purpose upgrade over classical kernels.

2 Background and Related Work

Quantum kernel methods. Rebentrost et al. [2014] first proposed a quantum algorithm for kernel-based classification with an asymptotic speedup under strong data-access assumptions. Schuld and Killoran [2019] and Havlíček et al. [2019] reformulated quantum classifiers as kernel methods operating in a feature Hilbert space defined by a data-encoding circuit, making the standard kernel-trick machinery (e.g., support vector machines [Cortes and Vapnik, 1995]) directly applicable once the kernel matrix is computed – either by a quantum device or, at small scale, by classical simulation, as we do here. Havlíček et al. [2019] also introduced the specific ZZ feature map we use, along with a synthetic dataset construction, discussed in Section 3.5, designed to have a large margin in the induced feature space and thus be provably easy for the associated kernel.

When quantum kernels do (not) help. A growing body of theoretical work argues that quantum kernels are not a universal upgrade. Huang et al. [2021] show that without structure in the data or in the choice of feature map, quantum models offer no advantage over classical ones and can be matched by classical kernels informed by the same data. Kübler et al. [2021] formalize this as an inductive-bias question: a generic quantum feature map induces a kernel whose implied prior over functions is often a poor match for real learning tasks, leading to worse generalization than a well-chosen classical kernel unless the feature map is tailored to the problem. Thanasilp et al. [2024] show that for many families of quantum kernels, off-diagonal kernel values concentrate exponentially closely (in the number of qubits) around a fixed value as problem size grows, which drives the Gram matrix toward a constant matrix and the resulting classifier toward predicting the majority class – exactly the failure mode we observe empirically in Section 5. Our contribution relative to this literature is not new theory but a careful, reproducible, fully-classical empirical demonstration: the same simulator, normalization, and model-selection protocol applied to both an engineered positive control and unmodified real tabular data, with the resulting gap diagnosed rather than merely reported.

89 **Kernel-target alignment.** Cristianini et al. [2001] propose kernel-target alignment as a measure
 90 of how well a kernel’s geometry matches a labeling function, independent of any specific classifier.
 91 We use it as a label-aware diagnostic to complement the label-agnostic kernel-value statistics of
 92 Thanasilp et al. [2024].

93 3 Method

94 3.1 The ZZ feature map and fidelity kernel

95 For n qubits and input $x \in \mathbb{R}^n$, the ZZ feature map applies R repetitions of a layer consisting of a
 96 Hadamard transform followed by a diagonal unitary encoding x :

$$U_\phi(x) = \left[\exp \left(i \sum_j x_j Z_j + i \sum_{j < k} (\pi - x_j)(\pi - x_k) Z_j Z_k \right) H^{\otimes n} \right]^R, \quad |\phi(x)\rangle = U_\phi(x) |0\rangle^{\otimes n},$$

97 where Z_j is the Pauli-Z operator on qubit j . This is the “full entanglement” variant of Havlíček et al.
 98 [2019]: every pair of qubits is coupled through the $(\pi - x_j)(\pi - x_k)$ term. We use $R = 2$ throughout.
 99 The fidelity kernel is $k(x, x') = |\langle \phi(x) | \phi(x') \rangle|^2 \in [0, 1]$.

100 3.2 Exact simulation without a quantum SDK

101 Because the encoding unitary is diagonal in the computational basis, the circuit reduces to alternating
 102 (i) a Walsh–Hadamard transform and (ii) an elementwise complex phase multiply – no gate-by-gate
 103 simulation or quantum library is required. Writing $s_i(z) = (-1)^{z_i}$ for the i -th bit of basis state z , the
 104 phase applied to $|z\rangle$ is

$$\theta(z, x) = \sum_i x_i s_i(z) + \sum_{i < j} (\pi - x_i)(\pi - x_j) s_i(z) s_j(z).$$

105 Using $s_i(z)^2 = 1$, the pairwise sum can be rewritten in closed form as $\frac{1}{2} [(\sum_i u_i s_i(z))^2 - \sum_i u_i^2]$
 106 with $u = \pi - x$, which lets us compute $\theta(\cdot, x)$ for all 2^n basis states and a batch of N samples with
 107 two matrix multiplications instead of an $O(n^2)$ loop over qubit pairs. The batched Walsh–Hadamard
 108 transform is applied by reshaping the $N \times 2^n$ state array to $N \times \underbrace{2 \times \cdots \times 2}_n$ and butterflying each

109 axis, giving $O(Nn2^n)$ total cost per repetition – exact, and, for the $n \leq 6$ qubits used in this paper,
 110 fast enough to run all experiments in under two seconds on a laptop CPU.

111 **Correctness.** We validate this vectorized implementation against an independent brute-force con-
 112 struction that builds the dense $2^n \times 2^n$ Hadamard matrix via Kronecker products and the diagonal
 113 phase matrix via an explicit double loop over qubit pairs, for $n \in \{1, 2, 3, 4\}$ and $R \in \{1, 2, 3\}$
 114 with random inputs. The two implementations agree to within 10^{-10} in every case. We additionally
 115 check, over 50 random 5-qubit inputs, that every simulated state has unit norm (confirming the circuit
 116 is unitary), and that resulting kernel matrices are symmetric, have unit diagonal, and are positive
 117 semi-definite (minimum eigenvalue $> -10^{-8}$), as required of a valid Gram matrix.

118 3.3 Kernel normalization

119 Classical kernel values are not restricted to $[0, 1]$: on our data (features scaled to $[0, 2\pi)$, Section 4),
 120 an unnormalized degree-3 polynomial kernel can reach entries of order 10^4 – 10^5 . In preliminary
 121 runs this made libsvm’s QP solver (default `max_iter` = -1 , i.e. unbounded) take pathologically
 122 long to converge on the polynomial kernel, effectively hanging the benchmark. We fix this, and
 123 simultaneously put all kernels on a comparable footing for the alignment analysis, by normalizing
 124 every Gram matrix to unit diagonal, $\hat{k}(x, x') = k(x, x') / \sqrt{k(x, x) k(x', x')}$, before model fitting.
 125 This is a no-op for the quantum kernel, which already satisfies $k(x, x) = 1$ by construction. As a
 126 safety net we also cap the SVM solver at 2×10^5 iterations for every kernel.

3.4 Kernel-target alignment

Following Cristianini et al. [2001], for labels $y \in \{-1, +1\}^N$ and Gram matrix K we report

$$A(K, y) = \frac{\langle K, yy^\top \rangle_F}{\|K\|_F \|yy^\top\|_F},$$

a label-aware measure, in $[-1, 1]$, of how well the kernel’s similarity structure matches the target labeling, independent of any specific downstream classifier.

3.5 Synthetic quantum-advantage dataset

We reproduce the engineered positive-control construction of Havlíček et al. [2019]. Fix a Haar-random $2^n \times 2^n$ unitary V (sampled via QR decomposition of a complex Gaussian matrix with the phase correction of Mezzadri [2007]) and a fixed non-trivial Pauli- Z -string observable $P = \text{diag}(f)$, $f_z = (-1)^{\text{parity}(z \& \text{mask})}$ for a random non-zero bitmask. Define the rotated observable $M = V P V^\dagger$ and, for a candidate point x , its margin under the feature map,

$$m(x) = \langle \phi(x) | M | \phi(x) \rangle = \sum_z |\langle z | V^\dagger | \phi(x) \rangle|^2 f_z, \quad y(x) = \text{sign}(m(x)).$$

We draw x uniformly from $[0, 2\pi)^n$ and keep only points with $|m(x)| \geq \gamma$, discarding the rest; this yields, by construction, a dataset that is separable by the quantum kernel with margin at least γ in the V -rotated feature space, while making no promise about the existence of an easy classical decision boundary. We build two such datasets: $n = 4$ qubits, $\gamma = 0.3$, and a harder, higher-dimensional $n = 6$ qubits, $\gamma = 0.2$, each with 200 class-balanced samples.

4 Experimental Setup

Datasets. In addition to the two synthetic datasets above, we use the *MiniBooNE particle identification* dataset [Roe, 2010], a real high-energy-physics benchmark distinguishing electron-neutrino signal events from muon-neutrino background events at the MiniBooNE experiment (Fermilab), described by 50 reconstructed kinematic variables per event; it is also used as a non-toy tabular-classification benchmark in the deep-learning-for-tabular-data literature [Gorishniy et al., 2021]. We access it via OpenML [Pedregosa et al., 2011], drop the 0.36% of events containing a -999 missing-value sentinel in one or more features, and take a class-stratified subsample of 400 events. We then standardize features, project with PCA to 4 or 6 principal components (matching $n = 4$ and $n = 6$ qubits, mirroring the two synthetic configurations), and rescale to $[0, 2\pi)$ with a min-max scaler – the same representation is fed to every kernel, so comparisons isolate the choice of kernel rather than confounding it with different preprocessing. The underlying 400-event subsample is identical across the two PCA dimensionalities, so they compare the same points at different projections rather than different data.

Baselines. RBF, polynomial (degree $\in \{2, 3\}$, $\text{coef0} = 1$), and linear kernels, via scikit-learn’s pairwise-kernel functions, each fed into an SVM with a precomputed Gram matrix.

Model selection. For every (dataset, kernel-family) pair we sweep a hyperparameter grid (RBF: $\gamma \in \{0.02, 0.05, 0.1, 0.2, 0.5\}$; polynomial: degree $\in \{2, 3\}$; quantum and linear: no kernel hyperparameter beyond the fixed construction above) and, for each setting, select the SVM regularization constant $C \in \{0.1, 1, 3, 10, 30, 100\}$ by 5-fold stratified cross-validation on a 70% training split, then report accuracy on the untouched 30% test split, refitting once on the full training split with the selected hyperparameters. This identical protocol is applied to all four kernel families. All experiments use seed 0 for the train/test split and the CV folds.

Implementation. All kernels, the SVM wrapper, and the model selection loop are implemented once and shared across kernel families (Section 3), so no part of the pipeline is quantum-specific except the kernel matrix computation itself.

5 Results

Table 1 shows the central result. On both engineered datasets, the quantum kernel dominates every classical kernel by a wide margin (98.3% vs. $\leq 48.3\%$ at $n=4$; 73.3% vs. $\leq 53.3\%$ at $n=6$, with all

Table 1: Test accuracy, cross-validation accuracy, and kernel-target alignment for the best hyperparameter setting of each kernel family (selected by CV accuracy), on each dataset. Bold marks the best test accuracy per dataset (ties bolded jointly). Majority-class baselines: 50.0% (both synthetic datasets, class-balanced by construction), 71.7% (MiniBooNE, both PCA dimensionalities, same underlying subsample).

Dataset	Kernel	CV acc.	Test acc.	Alignment
Synthetic ($n=4$, $\gamma=0.3$)	Quantum (ZZ)	1.000	0.983	0.166
	RBF	0.657	0.483	0.084
	Polynomial	0.593	0.483	0.002
	Linear	0.500	0.483	0.001
Synthetic ($n=6$, $\gamma=0.2$)	Quantum (ZZ)	0.843	0.733	0.095
	RBF	0.614	0.467	0.062
	Polynomial	0.643	0.450	0.014
	Linear	0.607	0.533	0.005
MiniBooNE (PCA-4)	Quantum (ZZ)	0.718	0.717	0.159
	RBF	0.875	0.817	0.253
	Polynomial	0.854	0.808	0.212
	Linear	0.854	0.817	0.202
MiniBooNE (PCA-6)	Quantum (ZZ)	0.718	0.717	0.144
	RBF	0.868	0.867	0.223
	Polynomial	0.854	0.833	0.210
	Linear	0.850	0.817	0.197

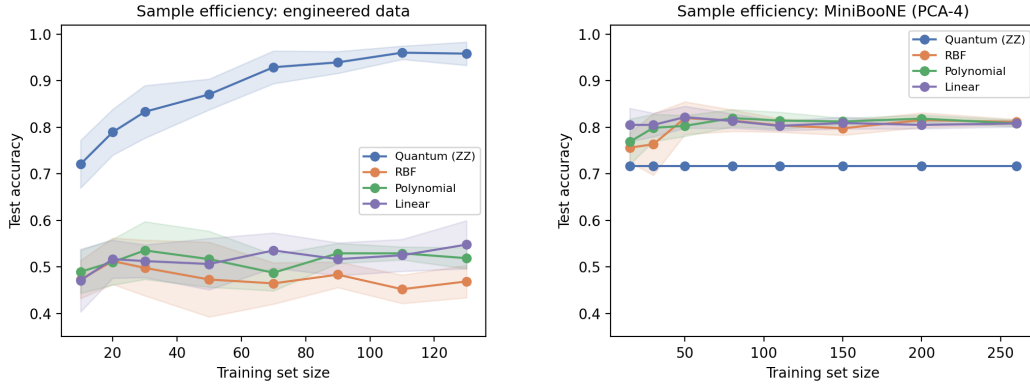


Figure 1: Test accuracy vs. training set size (mean $\pm$ std over 8 random training subsets at each size, fixed hyperparameters from Table 1). **Left:** engineered quantum-advantage data – the quantum kernel is the only one that learns. **Right:** MiniBooNE (real particle-physics data) – the quantum kernel is flat at the majority-class baseline regardless of training set size, while classical kernels learn quickly.

171 classical kernels within a few points of the 50% chance level). On MiniBooNE, the ranking reverses
172 completely: classical kernels reach 81–87% test accuracy while the quantum kernel falls to 71.7% at
173 both PCA dimensionalities – exactly the majority-class baseline in both cases – versus 9–15 points
174 above baseline for every classical kernel setting.

175 **Sample efficiency.** Figure 1 tracks test accuracy as a function of training set size. On the engineered
176 dataset (left), the quantum kernel improves steadily from 72% at 10 training points to 96% at 130,
177 while every classical kernel is flat at chance level regardless of how much data it sees – more data
178 does not help a kernel whose inductive bias does not match the task. On MiniBooNE (right), the
179 pattern is a mirror image: all three classical kernels climb quickly to roughly 80–82% within the first
180 50 training points, while the quantum kernel is a flat line at 71.7% from the smallest training size
181 onward, i.e. it never learns anything past the majority class, even with 260 training examples.

182 **Decision boundaries.** To visualize *why* the quantum kernel wins on engineered data, Figure 2 shows
183 decision regions for a 2-qubit version of the engineered dataset (chosen only so the input space is

184 plottable in 2D), together with the resulting test accuracy for each kernel. The quantum kernel reaches
 185 100% test accuracy with a highly fragmented decision region: the true boundary, induced by a fixed
 186 observable measured in a randomly rotated basis, is genuinely intricate when drawn in raw (x_1, x_2)
 187 coordinates, even though it corresponds to a single hyperplane cut in the kernel’s native feature space.
 188 The RBF kernel partially approximates this intricate region locally (85%), while the polynomial and
 189 linear kernels, which can only express comparatively smooth, low-order boundaries, are close to
 190 chance (52%, 54%).

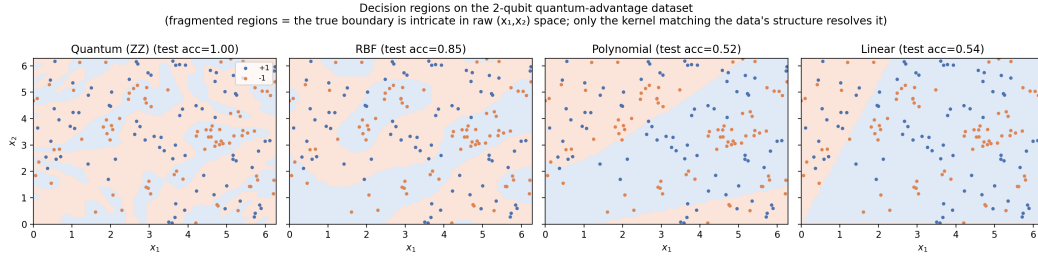


Figure 2: Decision regions for each kernel on a 2-qubit engineered dataset (points colored by true label). Only the quantum kernel, whose feature space matches how the labels were generated, resolves the intricate true boundary exactly; classical kernels with smoother inductive biases cannot.

191 6 Discussion

192 **Alignment tracks accuracy, but only within a kernel family.** Within the classical kernels on real
 193 data, alignment and test accuracy move together in a rough but not perfectly monotonic way (e.g.
 194 on MiniBooNE PCA-6, alignment rises monotonically from 0.207 to 0.240 as RBF’s γ grows from
 195 0.02 to 0.2, while accuracy peaks earlier, at $\gamma = 0.05$ (86.7%), before mildly declining even as
 196 alignment keeps rising) – consistent with alignment being a useful, if imperfect, proxy for kernel
 197 quality [Cristianini et al., 2001]. But alignment values alone do not explain the quantum-vs-classical
 198 gap in Table 1: the quantum kernel’s alignment on MiniBooNE (0.159 at PCA-4) is *higher* than
 199 its own alignment on the engineered $n=6$ dataset (0.095), even though it generalizes far better on
 200 the latter (73.3% test accuracy, well above the 50% baseline) than on the former (71.7%, exactly at
 201 baseline). Alignment computed on the training fold captures how separable the *training* labels look
 202 under the kernel, but does not on its own diagnose whether that separability will transfer to unseen
 203 points, particularly for a kernel whose off-diagonal values are weak and diffuse to begin with.

204 **Kernel concentration, not just alignment.** A direct check of the raw kernel values is more revealing.
 205 Off-diagonal quantum-kernel entries on MiniBooNE (PCA-4) have mean 0.091 and standard deviation
 206 0.087; on the engineered $n=4$ dataset the corresponding statistics are 0.069 and 0.068 – broadly
 207 similar in magnitude, and both in the vicinity of $1/2^n = 1/16 = 0.0625$, the value expected for
 208 Haar-random states. In other words, the quantum kernel is comparably “concentrated” – most points
 209 look almost equally (dis)similar to each other – on *both* datasets; concentration alone, as studied by
 210 Thanasilp et al. [2024], does not distinguish the case where the kernel works from the case where
 211 it does not. What differs is whether the few non-negligible off-diagonal similarities that do survive
 212 line up with the actual labels. On the engineered dataset they do, by construction: the labeling rule
 213 $y(x) = \text{sign}\langle\phi(x)|M|\phi(x)\rangle$ is defined directly from the same feature map that the kernel measures
 214 similarity in, so the SVM’s max-margin hyperplane in that induced space is, by design, close to the
 215 true decision rule. On MiniBooNE, the labels are determined by real neutrino-interaction physics
 216 with no relationship whatsoever to the randomly chosen V and observable mask that would have
 217 to align with them, so the concentrated, largely unstructured similarities give the SVM nothing to
 218 exploit and it falls back to the majority-class solution – precisely the failure mode Thanasilp et al.
 219 [2024] predict, and an instance of the general inductive-bias mismatch formalized by Kübler et al.
 220 [2021]: a generic quantum feature map is only a good prior for tasks whose structure happens to
 221 match it, and there is no reason a priori for a neutrino-event classification task to share structure with
 222 a randomly chosen quantum observable.

223 **Limitations.** (1) Exact simulation restricts us to $n \leq 6$ qubits; we make no claim about behavior
 224 at the qubit counts where a quantum computer would offer a computational advantage, nor about

runtime – our claim is purely about statistical generalization at accessible scale. (2) We test one feature map (ZZ, full entanglement, $R=2$) and one real benchmark family (MiniBooNE, at two PCA dimensionalities of the same underlying subsample); other feature maps (e.g. data re-uploading or trainable ansätze) or a wider benchmark suite spanning multiple real-data domains could behave differently, and a larger study is needed before drawing conclusions about quantum kernels in general rather than this specific, widely-used construction. (3) Our PCA-based preprocessing (to 4 or 6 dimensions), chosen to match a small qubit count, may itself discard information a classical kernel operating on the full 50-feature set could have used; we control for this by feeding classical kernels the same reduced representation, but a practitioner would not normally handicap a classical baseline this way. (4) We select C (and, for classical kernels, one additional kernel hyperparameter) by cross-validation, but do not tune the quantum feature map’s own hyperparameters (number of qubits, repetitions, entanglement pattern) as extensively as we tune the classical kernels’ hyperparameters, since the ZZ feature map has no natural analogue of γ or degree beyond R ; a more exhaustive search over feature-map variants is left to future work.

Broader impact. This is a small-scale, fully classical simulation study with no direct societal impact; we note it mainly as a caution against over-claiming quantum advantage in applied machine learning settings on the basis of feature-space size alone, and as a worked example that a claimed advantage should be checked against simple, well-tuned classical baselines under matched protocols before being reported.

7 Conclusion

Using a from-scratch, validated, exact simulation of the ZZ feature-map quantum kernel, we show that whether this kernel helps or hurts is entirely a function of whether the data’s structure matches the feature map, not an intrinsic property of “being quantum.” On data engineered to match it, the quantum kernel dominates classical baselines by up to 50 points of test accuracy and is the only kernel that benefits from additional training data; on a real high-energy-physics benchmark (MiniBooNE), it collapses to the majority-class baseline while classical kernels reach 81–87% accuracy under an identical protocol. This gap is explained by a combination of concentrated off-diagonal kernel values and, critically, the absence of any relationship between those values and the real labels – consistent with existing inductive-bias and concentration theory for quantum kernels. We release our simulator, datasets, and evaluation code so this protocol can be extended to other feature maps and benchmarks.

References

- Corinna Cortes and Vladimir Vapnik. Support-vector networks. *Machine Learning*, 20(3):273–297, 1995.
- Nello Cristianini, John Shawe-Taylor, Andre Elisseeff, and Jaz Kandola. On kernel-target alignment. In *Advances in Neural Information Processing Systems*, volume 14, 2001.
- Yury Gorishniy, Ivan Rubachev, Valentin Khurlov, and Artem Babenko. Revisiting deep learning models for tabular data. In *Advances in Neural Information Processing Systems*, volume 34, 2021.
- Vojtěch Havlíček, Antonio D Córcoles, Kristan Temme, Aram W Harrow, Abhinav Kandala, Jerry M Chow, and Jay M Gambetta. Supervised learning with quantum-enhanced feature spaces. *Nature*, 567(7747):209–212, 2019.
- Hsin-Yuan Huang, Michael Broughton, Masoud Mohseni, Ryan Babbush, Sergio Boixo, Hartmut Neven, and Jarrod R McClean. Power of data in quantum machine learning. *Nature Communications*, 12(1):2631, 2021.
- Jonas Kübler, Simon Buchholz, and Bernhard Schölkopf. The inductive bias of quantum kernels. In *Advances in Neural Information Processing Systems*, volume 34, 2021.
- Francesco Mezzadri. How to generate random matrices from the classical compact groups. *Notices of the American Mathematical Society*, 54:592–604, 2007.
- Fabian Pedregosa, Gaël Varoquaux, Alexandre Gramfort, Vincent Michel, Bertrand Thirion, Olivier Grisel, Mathieu Blondel, Peter Prettenhofer, Ron Weiss, Vincent Dubourg, et al. Scikit-learn: Machine learning in python. *Journal of Machine Learning Research*, 12:2825–2830, 2011.

- 275 Patrick Rebentrost, Masoud Mohseni, and Seth Lloyd. Quantum support vector machine for big data
276 classification. *Physical Review Letters*, 113(13):130503, 2014.
- 277 Byron Roe. MiniBooNE particle identification. UCI Machine Learning Repository, 2010.
- 278 Maria Schuld and Nathan Killoran. Quantum machine learning in feature hilbert spaces. *Physical*
279 *Review Letters*, 122(4):040504, 2019.
- 280 Supanut Thanasilp, Samson Wang, M Cerezo, and Zoë Holmes. Exponential concentration in
281 quantum kernel methods. *Nature Communications*, 15, 2024.