

Power BI Administration and SAP Datasphere Integration Plan

A practical consulting guide for governance design, architecture selection, proof-of-concept planning and implementation readiness

GOVERNANCE

ARCHITECTURE

EXECUTION PLAN

Prepared as a planning and documentation deliverable

22 July 2026

Document Purpose and Scope

This document converts the two customer assignments into structured consulting workstreams. It defines the available technical and governance options, the recommended target states, implementation phases, resource requirements, effort estimates, feasibility, risks, proof-of-concept activities, and expected deliverables.

Scope boundary

The assignments are primarily discovery, architecture, governance and execution-planning engagements. They do not require an immediate production rollout. However, the SAP Datasphere integration should include a limited proof of concept so that connectivity, authentication, security and performance recommendations are evidence-based.

Contents

- 1. Executive Summary
- 2. Task 1 - Power BI Administration Model
- 3. Task 2 - Connecting Power BI to SAP Datasphere
- 4. Combined Delivery Roadmap
- 5. Final Deliverable Package
- 6. Risks, Assumptions and Success Criteria
- 7. Selected Official References

1. Executive Summary

Both assignments are feasible and valuable as architecture and operating-model engagements. The first establishes controlled administration of Power BI and Microsoft Fabric. The second determines how Power BI should consume governed data products from SAP Datasphere.

Assignment	Recommended approach	Viability	Difficulty	Estimated duration
Power BI administration	Federated governance using Microsoft Entra groups, Fabric domains, standardized workspaces, apps and periodic access reviews	High	Medium	4-6 weeks
Power BI-Datasphere integration	Compare and test Open SQL/SAP HANA, OData and staged replication to Fabric	High	Medium-High	4-6 weeks
Both assignments together	Shared discovery followed by parallel governance and connectivity workstreams	High	Medium-High	6-8 weeks

Recommended design principles

- Use Microsoft Entra ID security groups for provisioning rather than direct user assignments.
- Apply Fabric tenant governance for organization-wide controls and Fabric domains for delegated business ownership.
- Separate Development, Test and Production workspaces for governed analytical products.
- Distribute approved content through Power BI apps and audiences rather than placing all consumers in workspaces.
- Treat SAP Datasphere exposed views and analytic models as governed consumption objects.
- Use SAP HANA/Open SQL as the primary high-volume connectivity pattern, OData for API-oriented or analytic-model scenarios, and Fabric staging when cross-source integration or workload isolation is required.

Key architectural decision

For SAP Datasphere, the customer should not select a connector only by convenience. The decision must consider data volume, refresh and latency, analytical semantics, identity propagation, gateway operations, security behavior, cost and support ownership.

2. Task 1 - Power BI Administration Model

2.1 Objectives

The administration framework must establish how the platform is governed, who can create or manage content, how workspaces are structured, how access is requested and reviewed, and how production content is monitored throughout its lifecycle.

1. Who can use Power BI and Microsoft Fabric?
2. Who can create workspaces and analytical content?
3. Who owns and supports each workspace?
4. Who can publish applications and manage audiences?
5. Who can see individual reports, semantic models and underlying data?
6. How are users onboarded, changed and removed?
7. How does content move from development to production?
8. How are licenses, activity, unused content, sharing and exceptions monitored?

2.2 Target Governance Architecture

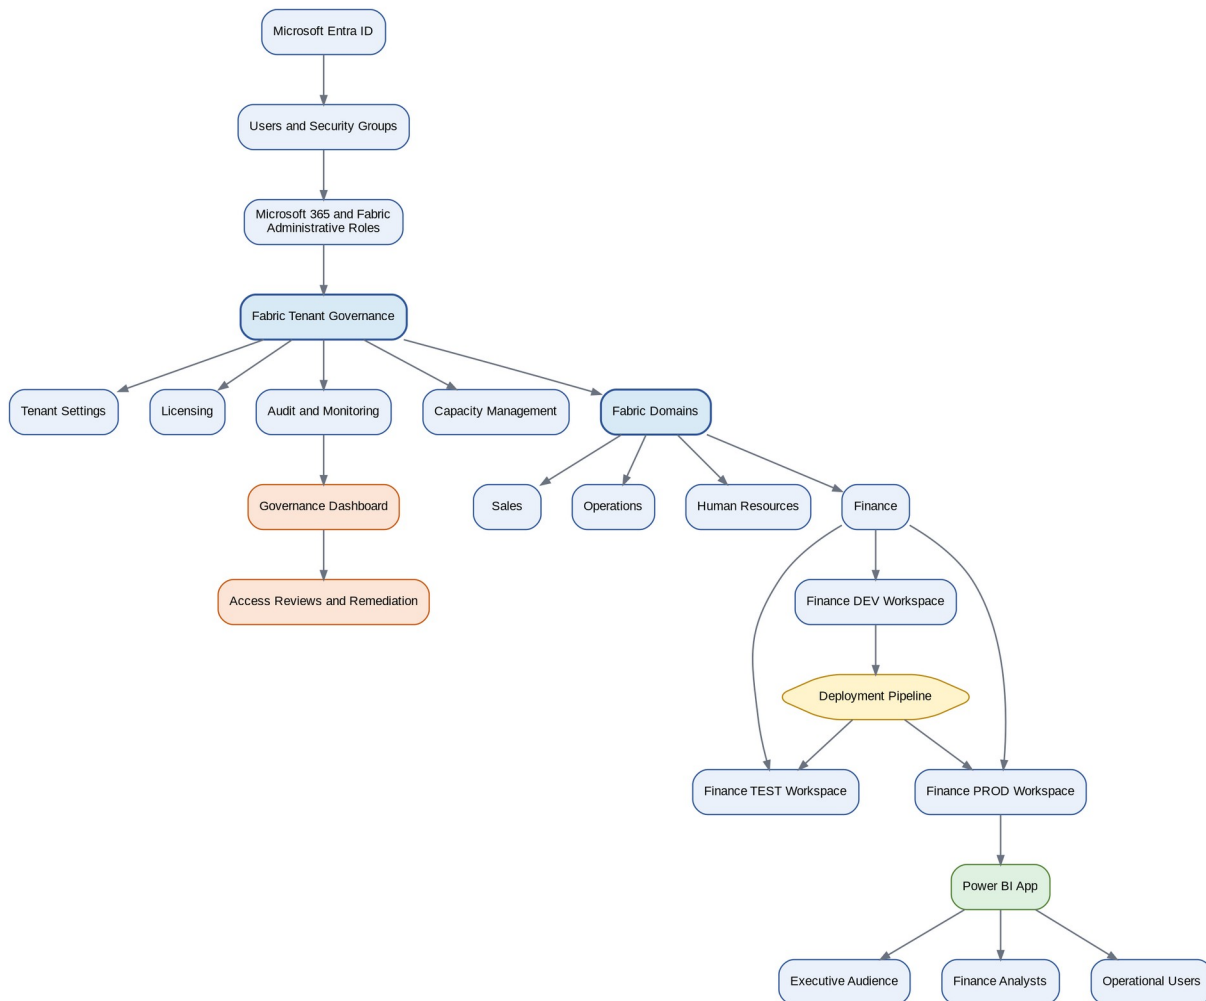


Figure 1. Recommended Power BI and Microsoft Fabric governance architecture.

The recommended model combines central platform controls with delegated business ownership. A small central administration team controls tenant-level settings, licensing, auditing and capacity. Business domains own their analytical products and workspaces within an approved governance framework.

2.3 Administrative Role Model

Role	Recommended responsibilities	Recommended assignment
Microsoft 365 Global Administrator	Emergency administration and assignment of administrative roles	Maximum restriction; not used for daily Power BI administration
License Administrator	Assign Power BI Pro or Premium Per User licenses	IT licensing team
User Administrator	Create users and security groups	Identity-management team
Fabric Administrator	Tenant settings, governance, audit, monitoring and workspace oversight	Two to four trained administrators
Capacity Administrator	Capacity allocation, workload and performance management	Platform or cloud team
Domain Administrator	Govern workspaces within a business domain	Data owner or BI lead for each domain
Gateway Administrator	Manage gateway clusters, data sources, credentials and availability	Data platform or integration team
Workspace Administrator	Manage one workspace and its access	At least two responsible owners per production workspace

2.4 Workspace Roles

Workspace role	Manage access	Publish or edit	Consume	Recommended users
Admin	Yes	Yes	Yes	Workspace owners and backup owners
Member	Limited role administration	Yes	Yes	BI leads and release managers
Contributor	No	Yes	Yes	Developers and report authors
Viewer	No	No	Yes	Testers or controlled consumers

Important row-level security rule

Row-level security is enforced for workspace Viewers and app consumers. It is not an effective restriction for Admins, Members or Contributors because those roles can edit the semantic model. Restricted users should consume through an app or hold only the Viewer role.

2.5 Recommended Access Model

Permissions should normally be granted through Microsoft Entra ID security groups. Direct user assignments should be limited to temporary or exceptional cases.

Suggested security-group naming pattern

PBI-<DOMAIN>-<PRODUCT>-<ENVIRONMENT>-<ROLE>

Examples: PBI-FIN-SALES-PROD-ADM, PBI-FIN-SALES-APP-EXECUTIVE, PBI-GATEWAY-ADMIN

- Assign at least two Admins to each production workspace.
- Do not allow Contributors to grant access.
- Provide report consumers with app access instead of workspace access whenever possible.

- Limit production Contributor access and separate development from release management.
- Use separate service identities for automation and scheduled processes.
- Require explicit approval for external sharing and temporary access.
- Review security-group membership and workspace access quarterly.
- Grant Build permission only when users need to create reports from an existing semantic model.

2.6 User Access Workflow

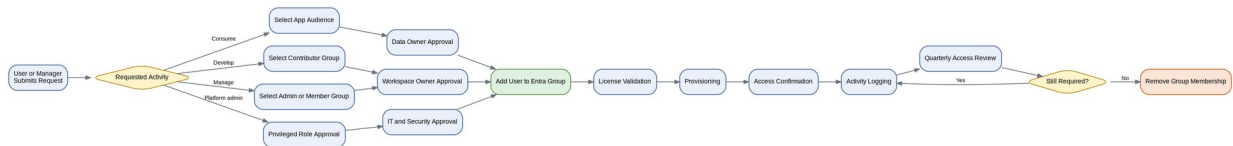


Figure 2. Recommended user access request, approval, provisioning and review workflow.

Required information in each access request

- User name, employee identifier, department and manager.
- Requested workspace, application, report or semantic model.
- Requested role and business justification.
- Data classification and requested duration.
- Approval from the relevant data owner or workspace owner.
- Confirmation that the user has the required license.

2.7 Workspace Organization Options

Option	Description	Advantages	Limitations
Department-based	Workspaces grouped under Finance, Sales, Operations and other functions	Simple ownership and easy initial adoption	Can become too broad; cross-functional products are difficult to classify
Data product or solution	Separate workspace lifecycle for each major analytical product	Clear ownership, release cycle and support boundary	Can create many workspaces and security groups
Centralized enterprise BI	A small set of central Development, Test and Production workspaces	Strong central control	Creates bottlenecks and conflicting release cycles
Hybrid - recommended	Domains for business ownership, product workspaces for important solutions, central enterprise BI and controlled sandboxes	Balances control, scale and delegated ownership	Requires clear naming, standards and domain accountability

Recommended naming convention

<DOMAIN>-<PRODUCT>-<ENVIRONMENT>

Examples: FIN-CASHFLOW-PROD, OPS-INVENTORY-TEST, HR-WORKFORCE-DEV

2.8 Tenant Settings Assessment

Setting category	Decision required
Workspace creation	Everyone or approved groups only
Publish to web	Normally disabled, with tightly controlled exceptions
External sharing	Disabled, limited groups or approved use cases
Export data	Policy according to data classification
Analyze in Excel	Approved analyst groups

Setting category	Decision required
XMLA endpoints	Read-only or read/write according to the development model
Service principals	Approved automation identities
Custom visuals	Certified visuals only or approved catalogue
Fabric workloads	Enabled by specific groups and capacities
Trial features	Controlled or disabled
Copilot and AI features	Security, geography, data and licensing review
Email subscriptions	Internal and external policy
Usage metrics	Workspace owners and governance teams
API access	Approved service principals and administrative tools

Tenant settings are feature controls, but they are not a complete security boundary. Data-source permissions, workspace roles, semantic-model permissions, app audiences, row-level security and external-sharing rules must be designed together.

2.9 Licensing Decision

Situation	Likely model
Small organization where all users collaborate	Power BI Pro
Small advanced team requiring Premium features	Premium Per User
Many report consumers and relatively few developers	Fabric F64+ or eligible Premium capacity
Broader Fabric engineering, data science and AI requirements	Microsoft Fabric capacity
External-customer embedded analytics	Separate embedded-capacity assessment

The licensing assessment should use the customer's contract, region, number of creators and consumers, model sizes, refresh frequency, concurrency and expected Fabric workloads. Public list prices alone are insufficient for a final business case.

2.10 Monitoring and Auditing

- Workspace creation, deletion and ownership changes.
- Role and permission changes.
- Report publication and application updates.
- External sharing and data export.
- Refresh failures and gateway health.
- Unused reports, semantic models and orphan workspaces.
- Workspaces with only one Admin.
- Excessive Admin, Member or Contributor access.
- Capacity and query-performance issues.
- Failed deployments and adoption by report, audience and department.

Retention requirement

Power BI activity data should be extracted and stored on a recurring basis when the customer requires governance history beyond the retention available through the standard administrative interface or API.

2.11 Task 1 Implementation Plan

Phase	Activities	Outputs	Effort
1. Discovery	Interviews, current-state inventory, licenses and security requirements	Current-state assessment	3-5 days
2. Governance design	Roles, decision rights, central versus federated model	Governance operating model and RACI	3-5 days
3. Workspace architecture	Domains, taxonomy, naming and lifecycle	Workspace architecture document	3-4 days
4. Access design	Group model, role matrix, app audiences and RLS approach	Access-control matrix	3-5 days
5. Tenant baseline	Review tenant settings, sharing, exports and APIs	Tenant-settings register	3-5 days
6. Operational processes	Onboarding, offboarding, workspace creation and exceptions	SOPs and request templates	4-6 days
7. Monitoring design	Audit, inventory, access review and KPIs	Monitoring architecture	3-5 days
8. Pilot and validation	Validate one business domain and workspace set	Pilot findings and corrections	3-5 days
9. Handover	Final documentation and workshops	Administration handbook	2-3 days

Estimated effort

Approximately 24-38 person-days, normally delivered over 4-6 calendar weeks. A documentation-only assessment without tenant inspection or pilot validation could be reduced to approximately 12-18 person-days, with lower confidence in the recommendations.

2.12 Resources and Expected Results

Resource	Approximate involvement
Power BI/Fabric architect	50-70%
Fabric administrator	20-30%
Microsoft Entra administrator	10-15%
Security/compliance representative	10-15%
BI lead or Center of Excellence	20-30%
Business data owners	2-4 hours per domain
Project coordinator	10-20%

Expected outputs

- Approved Power BI governance policy and RACI matrix.
- Administrative role model and Entra security-group structure.
- Workspace and domain taxonomy with Development, Test and Production lifecycle.
- User onboarding, modification and offboarding procedures.
- Application publishing, audience management, RLS and Build-permission guidelines.
- Licensing assessment and tenant-settings baseline.
- Audit, monitoring and access-review design.
- Pilot blueprint and a twelve-month improvement roadmap.

Task 1 feasibility

High. The required capabilities exist in Power BI, Microsoft Fabric and Microsoft Entra ID. The largest risks are organizational: unclear ownership, excessive direct permissions, uncontrolled workspace creation and the absence of recurring access reviews.

3. Task 2 - Connecting Power BI to SAP Datasphere

3.1 Principal Architecture Decision

The first decision is not the connector. It is the allocation of responsibility between SAP Datasphere, Microsoft Fabric and Power BI. The organization should avoid implementing the same KPI or transformation independently in Datasphere, Power Query and DAX.

Responsibility	Recommended system
SAP ingestion and harmonization	SAP Datasphere
Canonical facts and dimensions	SAP Datasphere
SAP-specific business semantics	SAP Datasphere
Reusable enterprise KPIs	Preferably Datasphere or a formally governed semantic layer
Power BI report model	Power BI semantic model
Report-specific calculations	Power BI / DAX
Visualization and report navigation	Power BI
End-user report access	Power BI app and row-level security
Source-level security	Datasphere Data Access Controls where feasible
Cross-source Microsoft data integration	Fabric Lakehouse or Warehouse when required

3.2 Connection Option 1 - SAP Datasphere Open SQL through SAP HANA



Figure 3. Open SQL / SAP HANA connectivity architecture.

Prerequisites and implementation steps

1. Identify the SAP Datasphere space and approved data products.
2. Create or select graphical and SQL views.
3. Enable the objects for external consumption.
4. Create a space-associated database user and grant read access.
5. Add the developer or gateway public IPv4 address to the Datasphere allowlist.
6. Install the 64-bit SAP HANA client on developer and gateway machines.
7. Configure TLS and certificate validation.
8. Connect using the SAP HANA connector or ODBC.
9. Select Import or, where supported and appropriate, DirectQuery.
10. Publish the semantic model and map the connection to the gateway.
11. Configure refresh or validate DirectQuery behavior.
12. Test Data Access Controls, workspace permissions and Power BI RLS.

Strengths	Limitations and risks
Suitable for high-volume analytical access	Requires HANA client installation and maintenance
Supports SQL filtering and query folding	Requires gateway infrastructure for service refresh and many cloud scenarios
Can support Import and DirectQuery patterns	Requires database credentials, rotation and IP allowlisting
Mature SAP HANA driver	DirectQuery performance depends on view design and concurrency
Strong fit for reusable facts and dimensions	Analytical semantics and security behavior require validation

Recommended use

Primary option for enterprise BI when datasets are large, DirectQuery may be needed, refresh windows are restrictive, relational views are governed in Datasphere, and the customer can operate a gateway and HANA drivers.

3.3 Connection Option 2 - SAP Datasphere OData APIs




Figure 4. SAP Datasphere OData API connectivity architecture.

Implementation alternatives

Alternative	Approach
Blank Power Query using OData.Feed	Create an OAuth client, obtain an access token, call the Datasphere consumption API using M, and load or transform the response
SAP Datasphere custom Power BI connector	Deploy a controlled connector implementation on developer machines and the gateway, configure OAuth, signing and update management

Strengths	Limitations and risks
HTTPS-based and OAuth-capable	More custom Power Query or connector work
No direct database network access required	OAuth token and technical-user secret lifecycle must be managed
Can consume relational and analytical endpoints	Standard OData should be treated as Import-oriented
Good for APIs, prototypes and moderate volumes	Pagination and service limits can increase refresh time
Can align with Datasphere analytical models	Complex data types and semantics require testing

Recommended use

Use OData when data volume is low or moderate, analytic models must be consumed, HTTPS/OAuth is preferred, DirectQuery is not required, or the customer wants an API-first architecture.

3.4 Connection Option 3 - Replicate or Stage Data in Microsoft Fabric



Figure 5. Fabric staging and semantic-serving architecture.

Strengths	Limitations and risks
Protects Datasphere from report concurrency	Copies data outside SAP
Supports historical snapshots and cross-source integration	Adds storage, Fabric capacity and operational cost
Centralizes data quality, observability and transformation	Requires incremental-load and reconciliation logic
Supports Fabric-native semantic-serving patterns	Can duplicate business logic already implemented in Datasphere
Decouples report interaction from the source platform	Data is not real time unless ingestion is frequent

Recommended use

Use Fabric staging when Power BI must combine SAP and non-SAP sources, historical snapshots are required, Datasphere workload isolation is important, DirectQuery performance is not acceptable, or Fabric is already the enterprise analytical platform.

3.5 Connection Option Comparison

Criterion	Open SQL / SAP HANA	OData API	Fabric staging
Initial complexity	Medium	Medium-High	High
Large data volumes	Strong	Limited-Moderate	Strong
DirectQuery	Possible	Not recommended through standard OData	Fabric-native serving patterns
Import	Yes	Yes	Yes
Near-real-time	Possible	Limited	Depends on ingestion frequency
Analytic-model semantics	Requires validation	Stronger through analytical endpoint	Usually transformed or recreated
Driver required	SAP HANA Client	No HANA driver	Depends on ingestion method
Gateway requirement	Generally yes for Power BI Service	Depends on connector and authentication	Depends on ingestion configuration
Authentication	Database credentials	OAuth user or technical user	Managed connection or technical identity
IP allowlist	Required for database access	Normally HTTPS based	Required when using database route
Data duplication	No in DirectQuery; yes in Import	Yes in Import	Yes
Operational effort	Medium	Medium-High	High
Best fit	Enterprise BI and high volume	API and moderate-volume consumption	Enterprise data platform and multi-source analytics

3.6 Recommended Target Architecture

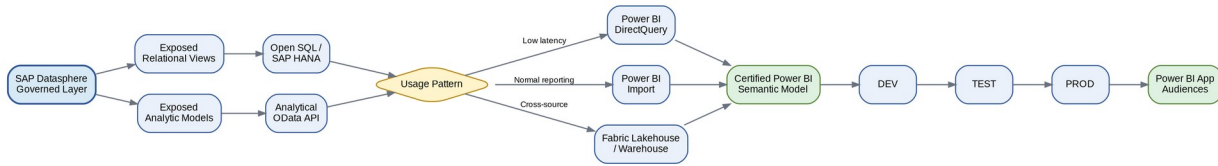


Figure 6. Recommended multi-pattern target architecture.

Recommended policy

1. Default to Open SQL/SAP HANA with Power BI Import for governed enterprise reporting.
2. Use DirectQuery only when latency or volume makes Import unsuitable and the performance test succeeds.
3. Use OData for analytic models, API-oriented scenarios or moderate extracts.
4. Use Fabric staging for cross-source integration, historical snapshots or workload isolation.
5. Do not connect production reports to ungoverned Datasphere development objects.
6. Allow production Power BI models to consume only approved, documented and externally exposed objects.
7. Define explicitly whether each reusable KPI is calculated in Datasphere or in the certified Power BI semantic layer.

3.7 Proof-of-Concept Plan

The architecture should not be approved solely from documentation. The customer should test the viable connection patterns with the same representative model and compare functional behavior, security, performance, reliability and operational effort.

Representative dataset

- One fact table and three to five dimensions.
- At least 5-20 million fact rows when representative data is available.
- Date, currency, text, decimal, identifier and calculated columns.
- At least one hierarchy and several measures.
- A Data Access Control rule and at least two business-user security profiles.
- Incremental or changing data suitable for refresh testing.

Test area	Tests
Connectivity	Desktop, service, gateway, TLS, firewall and allowlist
Authentication	Database user, OAuth interactive user and OAuth technical user
Security	Datasphere DAC, Power BI RLS, app audiences and credential behavior
Functional	Data types, null values, hierarchies, measures and filters
Performance	Initial load, refresh time, query latency and concurrency
Scale	Row counts, pagination, memory and model size
Reliability	Token expiration, password rotation and gateway restart
Operations	Monitoring, error logging and support ownership
Lifecycle	Development, Test and Production parameter changes
Cost	Fabric capacity, gateway VM, storage and administration
Reconciliation	Source totals compared with Power BI totals

Example acceptance criteria

- Approved financial totals reconcile exactly.
- Refresh completes within the agreed reporting window.

- No credentials are embedded in PBIX files or Power Query source code.
- Credentials can be rotated without redesign.
- Gateway restart or failover is successfully tested.
- P95 query latency meets the customer target.
- Datasphere security restrictions produce the expected user results.
- Environment-specific connection parameters can be deployed safely.
- Failed refreshes generate operational alerts.
- The design passes security and architecture review.

3.8 Task 2 Implementation-Planning Phases

Phase	Activities	Outputs	Effort
1. Discovery	Datasphere landscape, spaces, models, security and Power BI requirements	Current-state assessment	3-5 days
2. Consumption assessment	Identify exposed views and analytic models	Consumption inventory	2-4 days
3. Architecture options	Open SQL, OData and Fabric staging designs	Options paper	3-5 days
4. Security design	Users, OAuth, secrets, allowlists, DAC and RLS	Security architecture	3-5 days
5. PoC preparation	Representative model, drivers, gateway and clients	PoC environment	2-4 days
6. PoC execution	Test selected connection options	Test results	5-8 days
7. Performance and cost	Refresh, DirectQuery, pagination and capacities	Feasibility report	3-5 days
8. Target architecture	Select primary and secondary patterns	Architecture decision record	2-4 days
9. Delivery roadmap	Production implementation, migration and support plan	Implementation backlog	3-5 days
10. Handover	Documentation and technical workshop	Final architecture package	2-3 days

Estimated effort

Approximately 26-48 person-days, normally delivered over 4-6 calendar weeks. A documentation-only assessment without proof-of-concept testing could take 12-20 person-days but would not adequately validate security, authentication or performance.

3.9 Resources and Feasibility

Resource	Approximate involvement
Power BI/Fabric architect	50-70%
SAP Datasphere architect/modeler	40-60%
Power BI developer	30-50%
Datasphere space administrator	20-30%
Network/gateway engineer	10-20%
Identity and security specialist	10-20%
Business data owner	5-10%
Project coordinator	10-20%

Option	Feasibility	Main condition
Open SQL/SAP HANA	High	Gateway, HANA client, database user and IP allowlist are available
OData interactive OAuth	Medium-High	Import volumes are manageable and user token lifecycle is acceptable
OData technical user	High for scheduled extraction	Secrets are secured and pagination is implemented
Fabric staging	High	Fabric capacity and permission to replicate SAP data are available
DirectQuery	Medium-High	Datasphere views and capacity meet interactive performance targets

4. Combined Delivery Roadmap

The two workstreams can share discovery, stakeholder interviews, security review and platform inventory. Governance and connectivity design can then proceed in parallel. The indicative plan below assumes timely access to administrators, representative data and customer decision makers.

Week	Shared activities	Power BI governance workstream	Datasphere integration workstream
1	Kickoff, stakeholder interviews, current-state inventory	Collect tenant, license, workspace and access data	Collect spaces, exposed objects, network and security information
2	Requirements and architecture principles	Governance model, roles and decision rights	Connectivity options and data-consumption assessment
3	Security and identity review	Workspace taxonomy, group model and tenant baseline	Network, OAuth, database user and gateway preparation
4	Interim architecture review	Access processes, lifecycle and monitoring design	Open SQL and OData proof-of-concept execution
5	Performance and operational review	Governance pilot and corrections	Performance, security, refresh and reconciliation tests
6	Target-state decisions	Final administration handbook	Target architecture and decision record
7	Implementation planning	Backlog, adoption and training roadmap	Production backlog, migration and support model
8	Executive readout and handover	Governance workshop	Technical architecture workshop

Schedule dependency

The schedule can extend when access approvals, procurement, firewall changes, gateway provisioning, OAuth registration or representative data availability are delayed.

5. Final Deliverable Package

5.1 Power BI Administration Documents

1. Power BI governance policy and administrative operating model.
2. RACI matrix and role definitions.
3. Workspace taxonomy, naming standard and lifecycle.
4. Tenant-settings register and licensing assessment.
5. Workspace creation and user-access request templates.
6. Onboarding, modification and offboarding SOP.
7. Application publishing and audience-management SOP.
8. External-sharing, RLS and semantic-model permission guide.
9. Monitoring, audit and access-review architecture.
10. Governance KPI catalogue and twelve-month roadmap.

5.2 SAP Datasphere Integration Documents

1. Current-state system diagram and consumption-object inventory.
2. Open SQL, OData and Fabric staging architectures.
3. Option comparison and architecture decision matrix.
4. Authentication, secrets, network and gateway design.
5. Data Access Control and Power BI RLS responsibility matrix.
6. Proof-of-concept test plan, results and performance report.
7. Target architecture and architecture decision record.
8. Production implementation backlog and migration roadmap.
9. Support, monitoring and troubleshooting guide.
10. Risk register and cost-component assessment.

5.3 Expected Business Outcomes

- A repeatable Power BI governance operating model.
- Clear ownership, access controls and separation of duties.
- A controlled development-to-production process.
- A technically validated Datasphere connection strategy.
- A defined security, credential and support model.
- A realistic implementation backlog with dependencies, effort and acceptance criteria.

6. Risks, Assumptions and Success Criteria

6.1 Principal Risks

Risk	Impact	Mitigation
Unclear business and data ownership	Governance decisions and approvals stall	Assign domain and data owners during discovery
Excessive direct user permissions	Difficult access management and auditability	Use Entra groups and periodic access reviews
Uncontrolled workspace proliferation	Duplicated content and unclear support	Restrict creation and enforce taxonomy and lifecycle
Gateway or driver operations not owned	Refresh and DirectQuery instability	Define platform support RACI and monitoring
Security assumed rather than tested	Unexpected data exposure or failed access	Test DAC, RLS and technical identities in the PoC
Duplicated KPI logic	Inconsistent business results	Assign each reusable calculation to a governed semantic layer
Insufficient representative data	Performance conclusions are unreliable	Use realistic row counts, models and concurrent usage
Licensing or capacity not assessed	Unexpected cost or service constraints	Model creators, consumers, refresh, concurrency and workloads

6.2 Assumptions

- The customer can provide access to Power BI/Fabric administrators and SAP Datasphere administrators.
- A representative Datasphere model can be exposed for controlled testing.
- Security and network teams can review IP allowlisting, TLS, OAuth and gateway requirements.
- The customer will identify business data owners and approve target governance decisions.
- The final design will be validated against the customer's actual Microsoft and SAP contracts.

6.3 Engagement Success Criteria

- Governance roles and decision rights are approved.
- Every production workspace has a named owner and backup owner.
- A standard access request and review workflow is defined.
- The workspace taxonomy and environment lifecycle are accepted.
- At least one Datasphere connectivity pattern is validated end to end.
- Security behavior and data reconciliation are demonstrated.
- The customer receives a prioritized implementation backlog and support model.

7. Selected Official References

The following official Microsoft and SAP documentation supports the concepts summarized in this planning document. Product capabilities, licensing and connector behavior should be reconfirmed during implementation because cloud services evolve over time.

1. [Microsoft Fabric administrator roles](https://learn.microsoft.com/en-us/fabric/admin/roles) - <https://learn.microsoft.com/en-us/fabric/admin/roles>
2. [Microsoft Fabric domains](https://learn.microsoft.com/en-us/fabric/governance/domains) - <https://learn.microsoft.com/en-us/fabric/governance/domains>
3. [Power BI workspace roles](https://learn.microsoft.com/en-us/power-bi/collaborate-share/service-roles-new-workspaces) - <https://learn.microsoft.com/en-us/power-bi/collaborate-share/service-roles-new-workspaces>
4. [Power BI row-level security](https://learn.microsoft.com/en-us/fabric/security/service-admin-row-level-security) - <https://learn.microsoft.com/en-us/fabric/security/service-admin-row-level-security>
5. [Power BI apps for consumers](https://learn.microsoft.com/en-us/power-bi/explore-reports/end-user-apps) - <https://learn.microsoft.com/en-us/power-bi/explore-reports/end-user-apps>
6. [Microsoft Fabric tenant settings](https://learn.microsoft.com/en-us/fabric/admin/about-tenant-settings) - <https://learn.microsoft.com/en-us/fabric/admin/about-tenant-settings>
7. [Power BI licensing and feature availability](https://learn.microsoft.com/en-us/power-bi/fundamentals/service-features-license-type) - <https://learn.microsoft.com/en-us/power-bi/fundamentals/service-features-license-type>
8. [Power BI activity log guidance](https://learn.microsoft.com/en-us/power-bi/guidance/admin-activity-log) - <https://learn.microsoft.com/en-us/power-bi/guidance/admin-activity-log>
9. [SAP Datasphere Open SQL consumption](https://help.sap.com/docs/SAP_DATASPHERE/c8a54ee704e94e15926551293243fd1d/4db6f5a329af44509ae422ad707877b2.html) - https://help.sap.com/docs/SAP_DATASPHERE/c8a54ee704e94e15926551293243fd1d/4db6f5a329af44509ae422ad707877b2.html
10. [SAP Datasphere database access and allowlist](https://help.sap.com/docs/SAP_DATASPHERE/be5967d099974c69b77f4549425ca4c0/3de55a78a4614deda589633baea28645.html) - https://help.sap.com/docs/SAP_DATASPHERE/be5967d099974c69b77f4549425ca4c0/3de55a78a4614deda589633baea28645.html
11. [Microsoft SAP HANA connector](https://learn.microsoft.com/en-us/power-query/connectors/sap-hana/overview) - <https://learn.microsoft.com/en-us/power-query/connectors/sap-hana/overview>
12. [SAP Datasphere OData consumption APIs](https://help.sap.com/docs/SAP_DATASPHERE/43509d67b8b84e66a30851e832f66911/7a453609c8694b029493e7d87e0de60a.html) - https://help.sap.com/docs/SAP_DATASPHERE/43509d67b8b84e66a30851e832f66911/7a453609c8694b029493e7d87e0de60a.html
13. [Microsoft OData Feed connector](https://learn.microsoft.com/en-us/power-query/connectors/odata-feed) - <https://learn.microsoft.com/en-us/power-query/connectors/odata-feed>
14. [Microsoft Fabric SAP HANA connector](https://learn.microsoft.com/en-us/fabric/data-factory/connector-sap-hana) - <https://learn.microsoft.com/en-us/fabric/data-factory/connector-sap-hana>

Overall evaluation

These are appropriate first customer assignments because they emphasize technical discovery, architecture, governance, documentation and planning rather than extensive application development. Their value lies in creating a repeatable operating model and a technically validated integration strategy.