


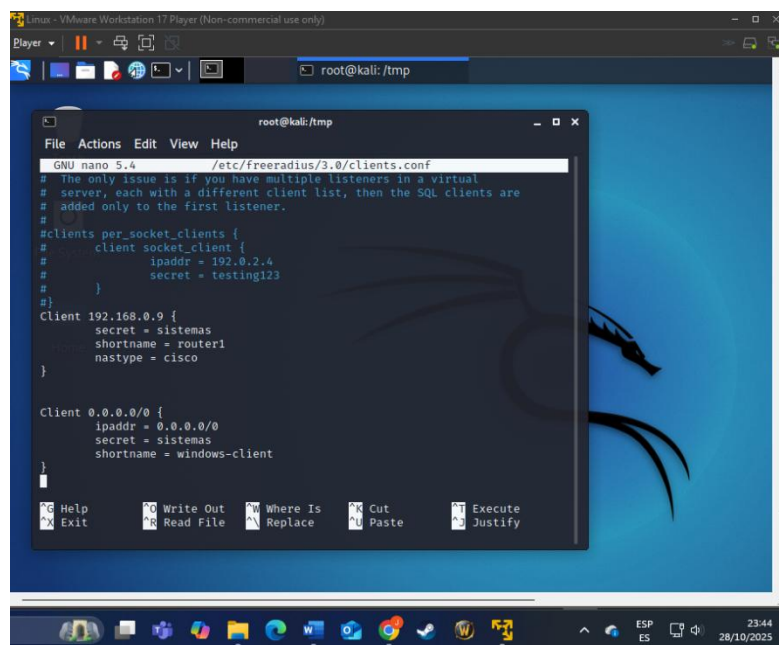


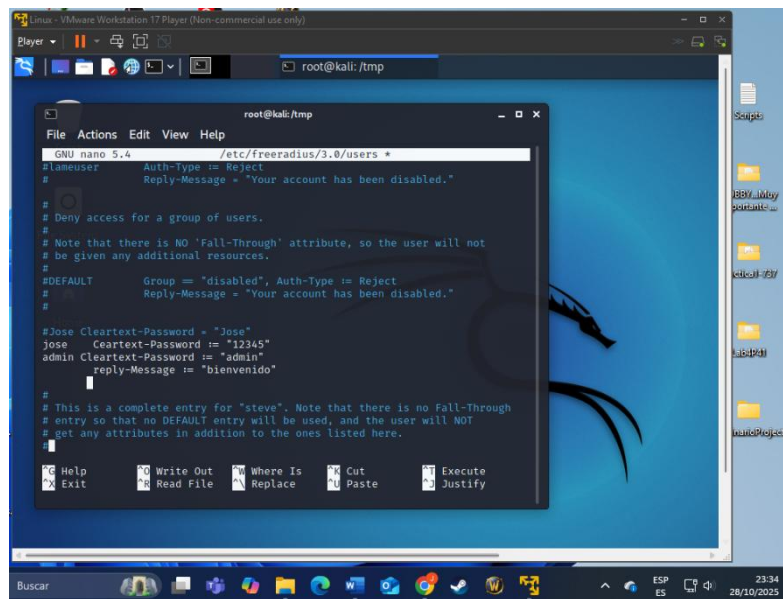

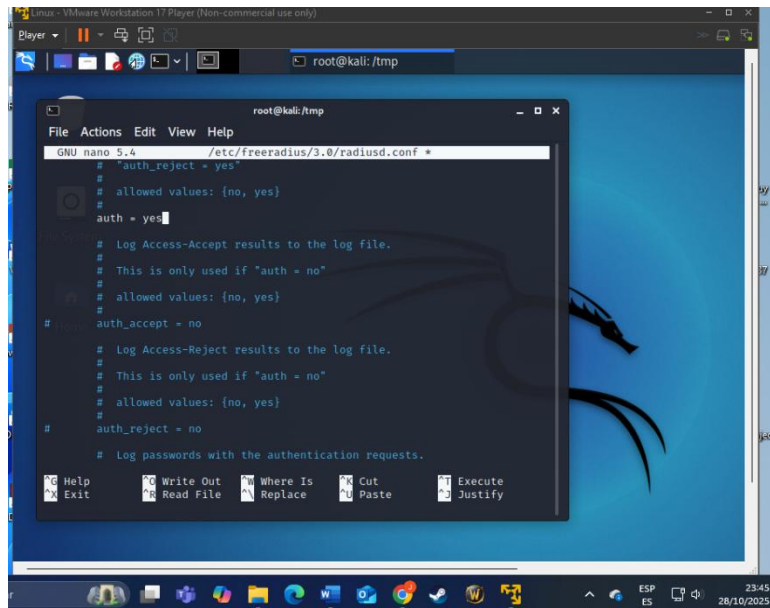

```
root@kali:/tmp
File Actions Edit View Help
GNU nano 5.4 /etc/freeradius/3.0/radiusd.conf *
# "auth_reject = yes"
#
# allowed values: {no, yes}
auth = yes
#
# Log Access-Accept results to the log file.
#
# This is only used if "auth = no"
#
# allowed values: {no, yes}
#
auth_accept = no
#
# Log Access-Reject results to the log file.
#
# This is only used if "auth = no"
#
# allowed values: {no, yes}
#
auth_reject = no
#
# Log passwords with the authentication requests.
```

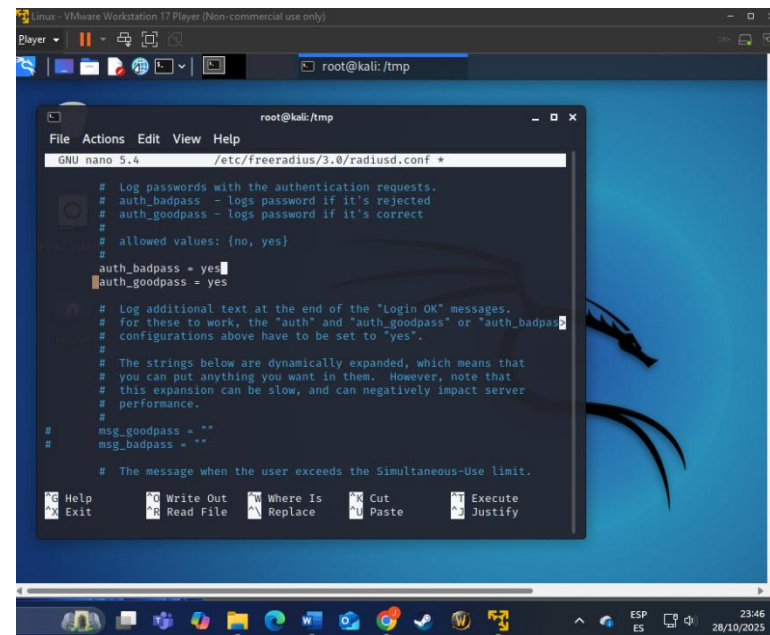

```
root@kali:/tmp
File Actions Edit View Help
GNU nano 5.4 /etc/freeradius/3.0/radiusd.conf *
#
# Log passwords with the authentication requests.
#
# auth_badpass - logs password if it's rejected
#
# auth_goodpass - logs password if it's correct
#
# allowed values: {no, yes}
#
auth_badpass = yes
auth_goodpass = yes
#
# Log additional text at the end of the "Login OK" messages.
#
# for these to work, the "auth" and "auth_goodpass" or "auth_badpass"
# configurations above have to be set to "yes".
#
# The strings below are dynamically expanded, which means that
# you can put anything you want in them. However, note that
# this expansion can be slow, and can negatively impact server
# performance.
#
# msg_goodpass = ""
#
# msg_badpass = ""
#
# The message when the user exceeds the Simultaneous-Use limit.
```


Repositorio: <https://github.com/Luismi055/SeguridadLabs>