

Primeiras aulas

TAREFA # 12 -- DETERMINAR VIAGEM CORTE
PARA CADA n

. FILTRAR $tt: tt_{filtrado} = (tt < t_{corte})$ import numpy as np

. CALCULAR: MEDIA: $np.mean(tt_{filtrado})$

DESVIO: $np.std(tt_{filtrado})$

COEF. DE VARIACÃO: $DESVIO / MEDIA < 0.15$

```
lista_n = [1000, 10000, 100000]
t = []
for n in lista_n:
    tic = time()
    for i in range(n):
        x = 1
    toc = time()
    t.append(toc - tic)
    print(f'n: {n} tempo: {t[-1]:.4f}')
```

from time import time
from matplotlib import pyplot as plt

R = 100

lista_n = [1000, 10000, 100000]

t = []

for n in lista_n:

tt = []

for r in range(R):

tic = time()

for i in range(n):

x = 1

toc = time()

tt.append(toc - tic)


t.append(tt)

plt.plot(tt)

plt.show()

bins

$\{n\}$
members $n\{n\}.png$

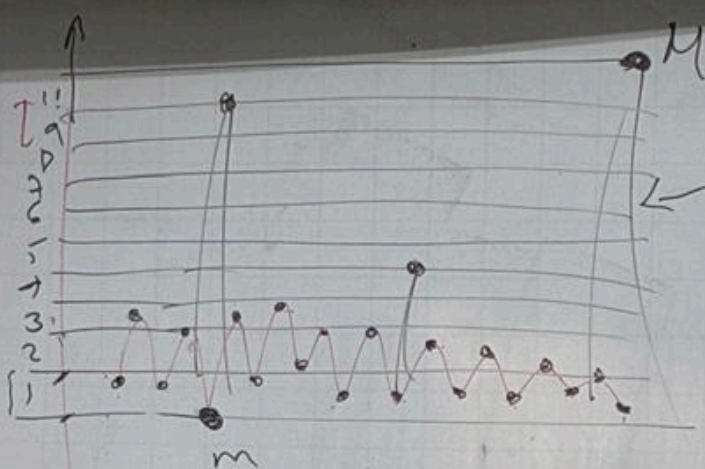

← pontos fora do padrão
"outliers"

