




DNC

Data Errata - Funções SQL

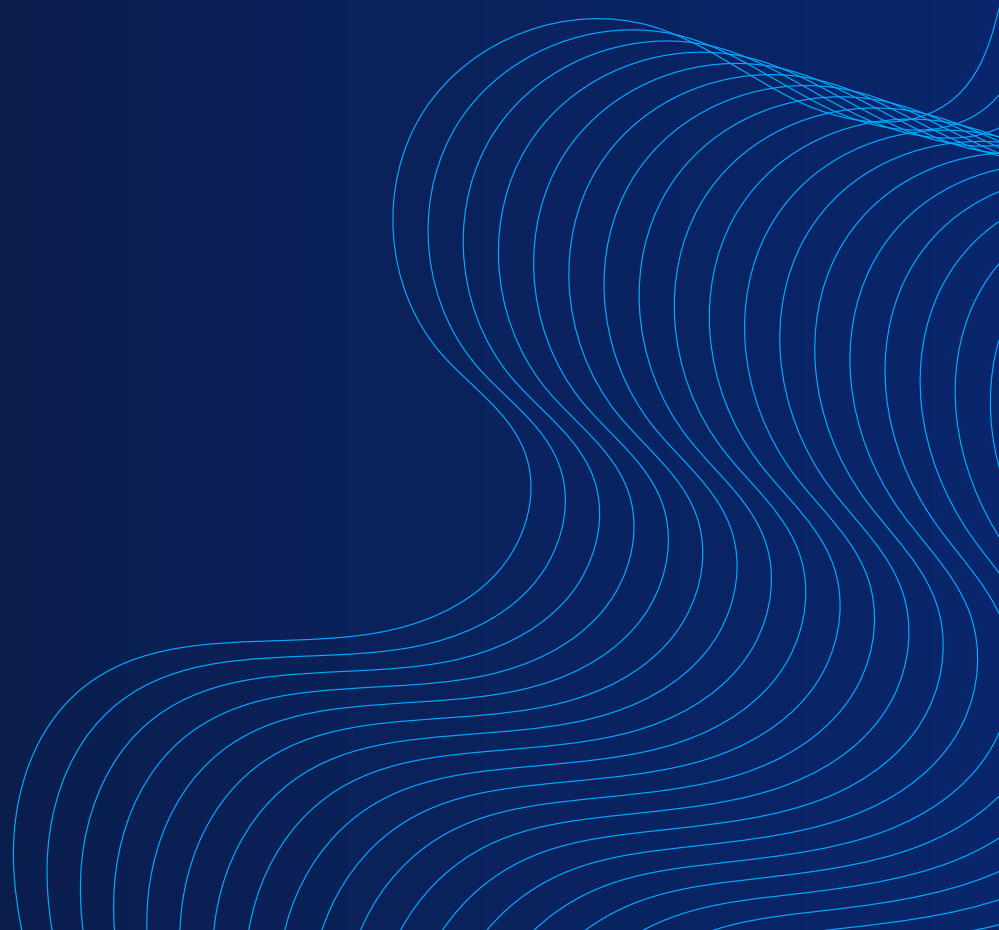

Introdução

Devido ao Metabase, ocorreram algumas atualizações, e dentre elas foi do SQL Server para o MySQL, Embora ambos sigam a linguagem SQL, algumas funções e operadores possuem implementações específicas que precisam ser ajustadas para garantir a compatibilidade e o correto funcionamento das consultas.

Neste contexto, realizamos algumas adaptações nas queries originalmente escritas para SQL Server, ajustando-as para que funcionem corretamente no MySQL. As principais mudanças incluem:

- Conversão de **DATEDIFF** e **DATEADD**
- Substituição de **ISNULL** por **IFNULL**
- Conversão de tipos de dados

Essas modificações garantem que as consultas SQL funcionem corretamente dentro do ambiente MySQL, sem alterar a lógica original das operações realizadas. A seguir, apresentamos as queries convertidas, aplicando essas adaptações conforme necessário.

Substitua essa query atual:

```
select ID, title, Created_At,  
CAST(Created_At AS date),  
YEAR (Created_At), now(), cast  
(concat('2018' '-', '10', '-', '21') as  
date), dateadd(year, 10,  
Created_At) from Products
```

Por essa atualizada:

```
select ID, title, Created_At,  
CAST(Created_At AS date),  
YEAR(Created_At), NOW(),  
STR_TO_DATE(CONCAT('2018', '-', '10',  
'-', '21'), '%Y-%m-%d'),  
DATE_ADD(Created_At, INTERVAL 10  
YEAR) from Products;
```

Substitua essa query atual:

```
select ID, title, Created_At,  
CAST(Created_At AS date),  
YEAR (Created_At), now(), cast  
(concat('2018' '-', '10', '-', '21') as  
date), dateadd(year, 10,  
Created_At), datediff(month,  
Created_At, now()) from  
Products
```

Por essa atualizada:

```
select ID, title, Created_At,  
CAST(Created_At AS date),  
YEAR(Created_At), NOW(),  
STR_TO_DATE(CONCAT('2018', '-', '10',  
'-', '21'), '%Y-%m-%d'),  
DATE_ADD(Created_At, INTERVAL 10  
YEAR), TIMESTAMPDIFF(MONTH,  
Created_At, NOW()) from Products;
```

Substitua essa query atual:

```
select sum(SUBTOTAL) as faturamento,  
cast(CREATED_AT as date) as dia from ORDERS  
where year(CREATED_AT) = 2018 and  
month(CREATED_AT) = 7 or ( CREATED_AT  
between cast('2017-01-01' as date) and  
cast('2017-12-31' as date) ) or ( CREATED_AT  
between dateadd(year, -1, cast('2017-01-01' as  
date) ) and dateadd(year, -1, cast('2017-12-31' as  
date) ) ) group by dia order by dia
```

Por essa atualizada:

```
SELECT SUM(SUBTOTAL) AS faturamento,  
CAST(CREATED_AT AS DATE) AS dia FROM ORDERS  
WHERE (YEAR(CREATED_AT) = 2018 AND  
MONTH(CREATED_AT) = 7) OR (CREATED_AT  
BETWEEN CAST('2017-01-01' AS DATE) AND  
CAST('2017-12-31' AS DATE) ) OR (CREATED_AT  
BETWEEN DATE_SUB(CAST('2017-01-01' AS DATE),  
INTERVAL 1 YEAR) AND DATE_SUB(CAST('2017-12-  
31' AS DATE), INTERVAL 1 YEAR) ) GROUP BY dia  
ORDER BY dia;
```

Substitua essa query atual:

```
select ID, SUBTOTAL, DISCOUNT,  
ceiling(SUBTOTAL), floor(SUBTOTAL),  
round(SUBTOTAL, 1), isnull (DISCOUNT,  
0.01*SUBTOTAL), cast(SUBTOTAL as char) from  
ORDERS
```

Por essa atualizada:

```
SELECT ID, SUBTOTAL, DISCOUNT,  
CEILING(SUBTOTAL), FLOOR(SUBTOTAL),  
ROUND(SUBTOTAL, 1), IFNULL(DISCOUNT, 0.01 *  
SUBTOTAL), CAST(SUBTOTAL AS CHAR) FROM  
ORDERS;
```

Substitua essa query atual:

```
select ID, SUBTOTAL, DISCOUNT,  
cast(CREATED_AT as date) as DIA from ORDERS  
where isnull(DISCOUNT, 0) < 5 order by ID, DIA
```

Por essa atualizada:

```
SELECT ID, SUBTOTAL, DISCOUNT,  
CAST(CREATED_AT AS DATE) AS DIA FROM  
ORDERS WHERE IFNULL(DISCOUNT, 0) < 5  
IFNULL ORDER BY ID, DIA;
```




E aí, curtiu?

Esperamos que esse resumo tenha enriquecido sua perspectiva estratégica para enfrentar os desafios.

Salve esse PDF para consultar sempre que precisar.