Checkpoint 2

Łukasz Piętka, Michał Krzysztosiak, Konrad Miturski, Michał Sobczak

November 4, 2026

US-07 View Assigned Deliveries

Role: Delivery Driver

Priority: Must Have

User Story: As a delivery driver, I want to view my assigned deliveries, so that I know which orders I need to deliver and where.

Functional Acceptance Criteria

- Can the delivery driver view a list of deliveries currently assigned to them?
- Does each assigned delivery display its delivery address?
- Can the driver identify which order corresponds to each delivery?
- Does the system prevent a driver from viewing deliveries assigned to other drivers?
- Does the delivery list reflect newly assigned orders after its data is refreshed?
- Does the system display an appropriate message when no deliveries are assigned?

Rest of user story reverse sides available in GitHub repository

US-07 View Assigned Deliveries

Non-Functional Requirements


- **Performance:** The assigned deliveries list should load within 2 seconds for at least 95% of requests under normal operating conditions.
- **Security:** Drivers must only access delivery information for orders currently assigned to them.
- **Usability:** The delivery list must remain readable and usable on mobile devices.
- **Reliability:** Successfully saved assignments must remain available after the driver signs out and signs in again.

Notes and Edge Cases


- No deliveries are assigned to the driver.
- A new delivery is assigned while the driver is viewing the list.
- A delivery is reassigned to another driver.
- The driver temporarily loses network connectivity.
- The driver attempts to access another driver's delivery details.

Rest of user story reverse sides available in GitHub repository

Activity Diagram - Placing and paying for order

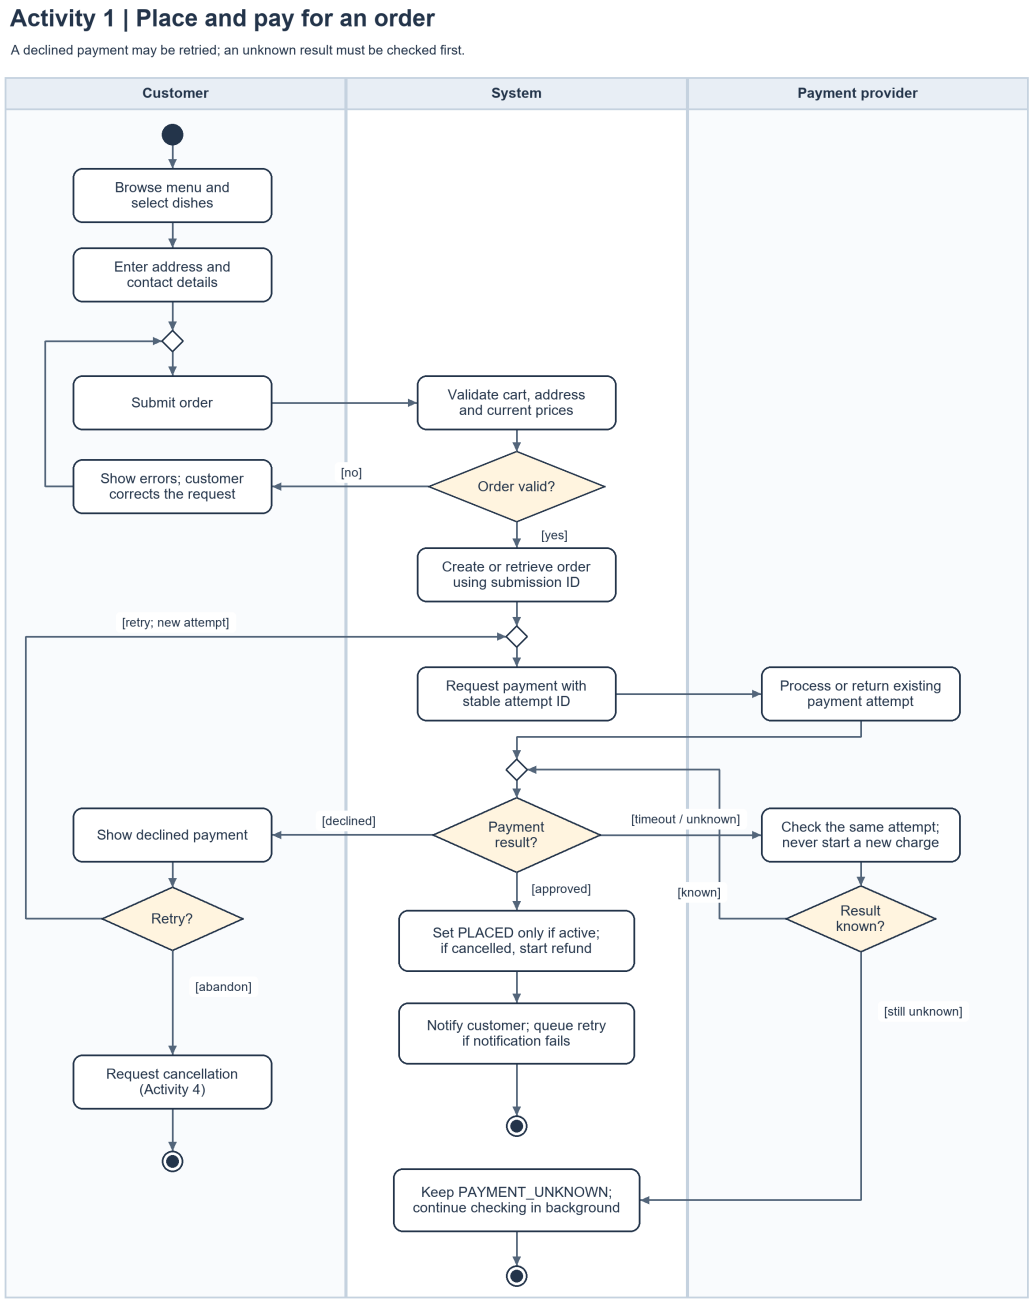

State Diagram - Reservation

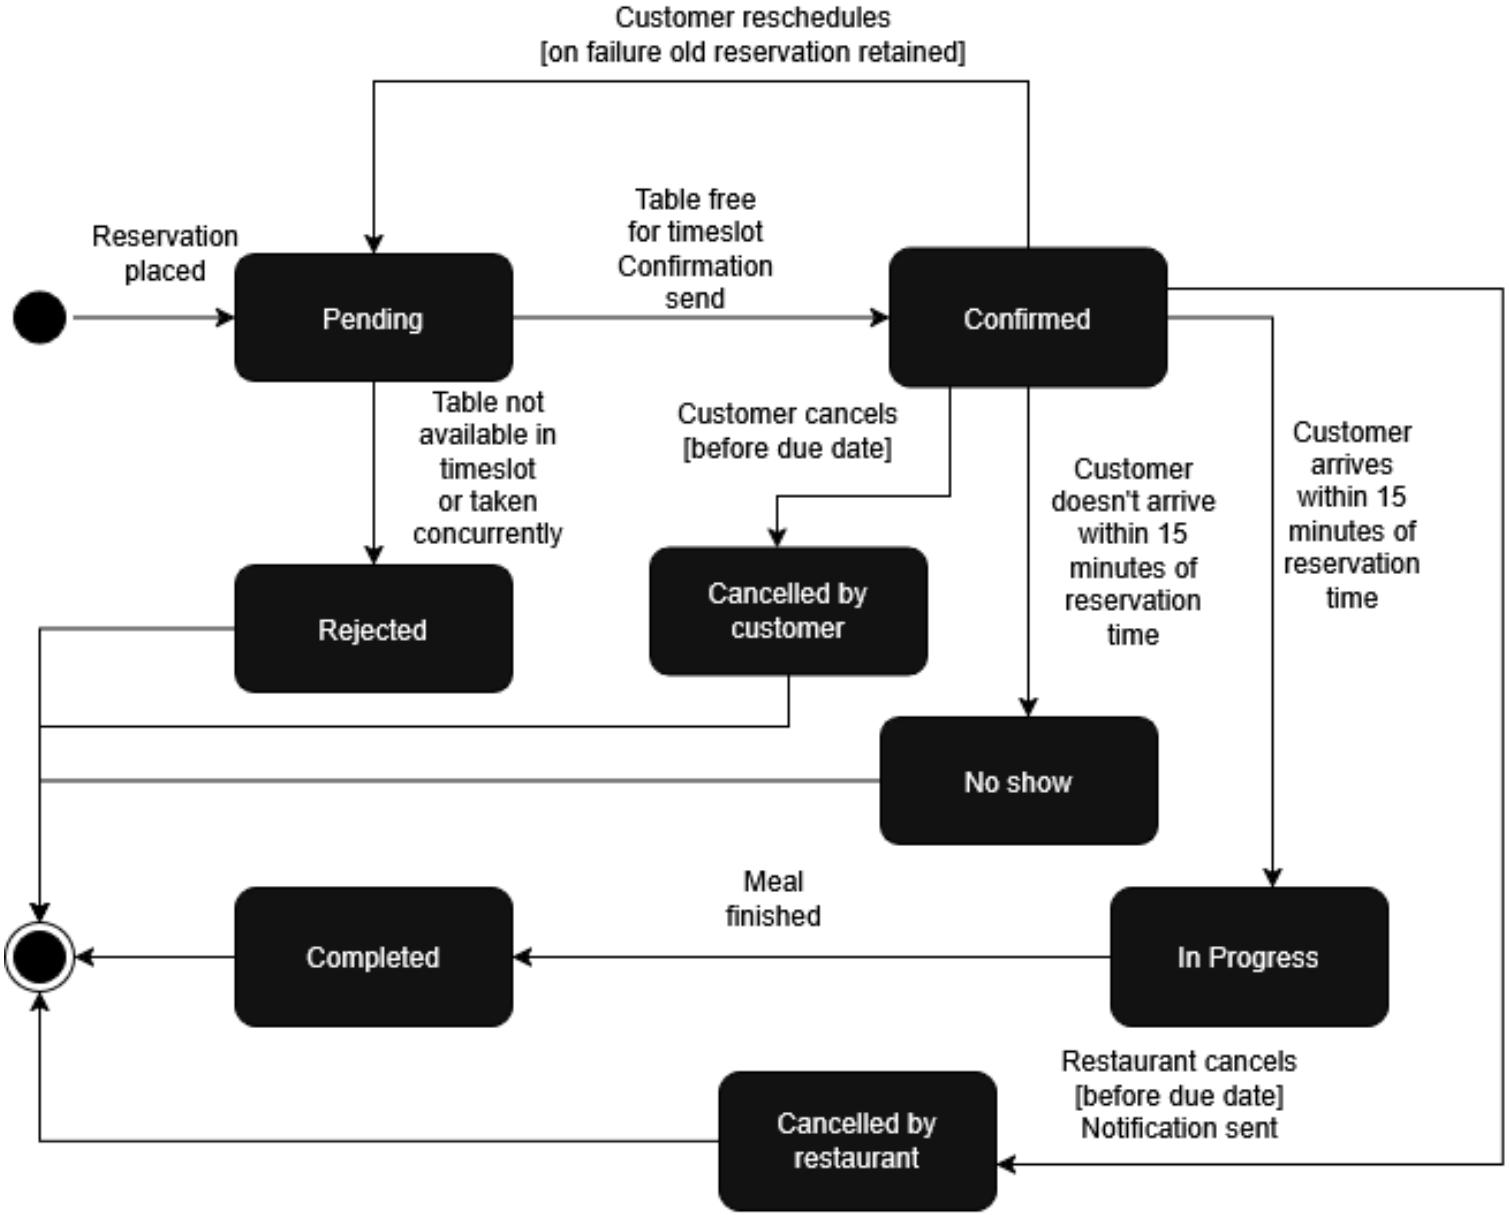

Rest of state diagrams available in GitHub repository